

MATERIAL




HOUSING : HI.-TEMP PLASTIC(UL 94V-0),BLACK


LATCH : STAINLESS STEEL,T=0.15mm
TIN PLATED OVERALL

TERMINAL : COPPER ALLOY,T=0.12mm
GOLD PLATED OVER NICKEL

SPECIFICATION

1. CURRENT RATING : 2 A .MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
3. CONTACT RESISTANCE :30mΩ MAX.
4. INSULATION RESISTANCE :1000MΩ MIN AT 500V DC.
5. OPERATING TEMPERATURE : -40°C TO +85°C.
6. DURABILITY:5000 CYCLE.
7. OPERATING FORCE OF PIN :0.10kgf MIN.

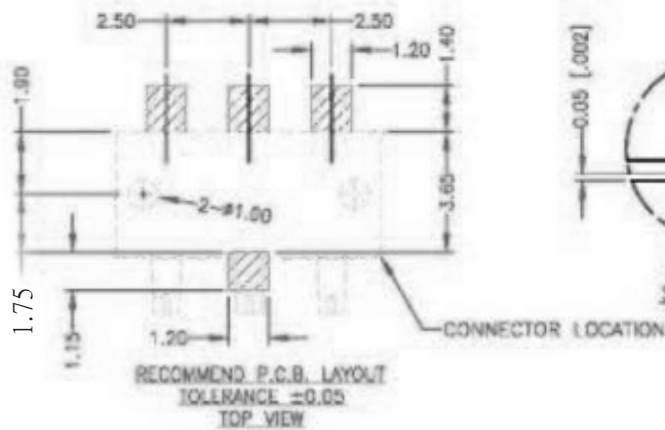

GENAL TOLERANCE	H. D LI	PART NO
.X ± 0.25	DESIGN	HB250-032-1
.XX ± 0.15	H. D LI	TITLE Battery Conn. Pitch2.5mm
.XXX ± 0.05	CHECKED	3 PIN SMT DISPLACEMENT=0.75
	Y. M LU	
	APPROVED	
UNIT :mm	K. J Kang	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.