

MATERIAL

Insulator: Glass Reinforced LCP UL94V-0

Contacts: Brass

Mount ear: Brass; Tin/Lead plated overall

CONTACT PLATING

Contact area: Gold flash plating over 40u" Nickel

Solder tail area: 100u" Tin/Lead plating over 40u" Nickel

ORDER INFORMATION:CFPI - 502 - $\frac{X}{a} 1$ - $\frac{B X}{b c}$ - $\frac{D}{d}$

a. Plating selection :

0 : 5u" Gold Plating

1 : 10u" Gold Plating

2 : 30u" Gold Plating

3 : xxu" Gold Plating

b. Color selection :

B : Black

c. Type selection :

N : Normal Type


R : Reverse Type


d. Pack selection:

D : Disk Pack





VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2005/04/01	A	4-5	Add CFPI-502-X1-BX-D Plan

GENAL TOLERANCE	VER DRE. 2005/04/01	PART NO
X. ± 0.50	A H. D L I	CFPI-502-X1-BX-D
X. ± 0.35	DESIGN	TITLE
XX ± 0.25	H. D L I	Compact flash card 50 p
XXX ± 0.05	CHECKED	
	Y. M LU	
	APPROVED	
UNIT :mm	K. J Kang	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

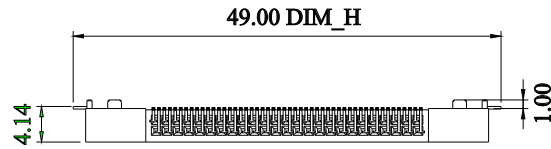

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

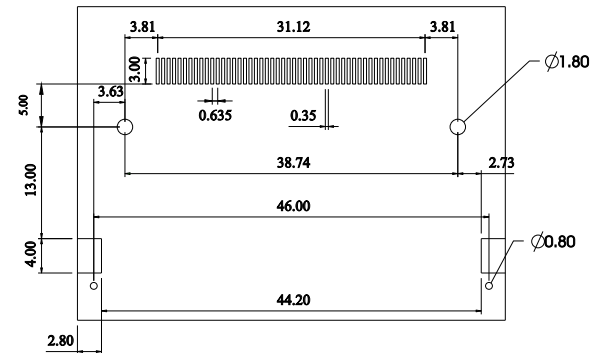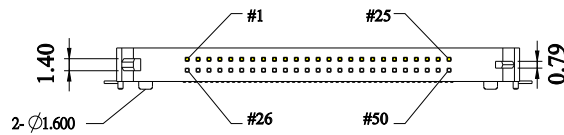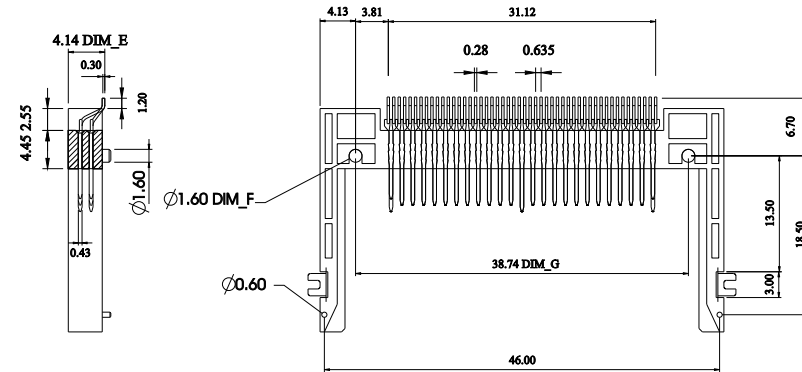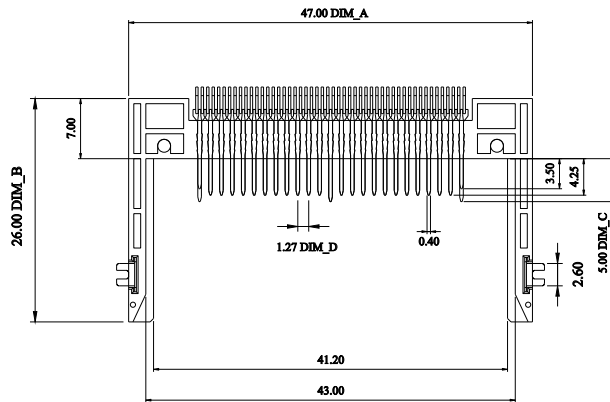

GENAL TOLERANCE	VER DRE. 2005/04/01	PART NO
X. ±0.50	A H. D L I	CFPI-502-X1-BX-D
.X ±0.35	DESIGN	TITLE
.XX ±0.25	H. D L I	Compact flash card 50 p
.XXX ±0.05	CHECKED	
	Y. M LU	
	APPROVED	
UNIT :mm	K. J Kang	