

一、膠芯

1.材質：PBT+玻璃纖維

2.顏色：黑色

二、端子

1.材質：磷銅

2.表面處理：端子表面鍍錫(100U" min)

3.瞬間止推力：每PIN至少0.5公斤

三、電性參數

1.電流：1mA

2.耐壓：AC 1000V 5S

3.絕緣：1000兆姆 500V DC

4.溫度：-55°C ~ +105°C

ORDER INFORMATION:

$$\text{ICS254} - \frac{\text{XX}}{\text{a}} \frac{\text{1}}{\text{b}} - \frac{\text{1}}{\text{c}} - \frac{\text{B P}}{\text{d}}$$

a. Pin of numbers:

24 ~ 48

b. Plastic Base :

1 : H= 15.24 mm(standard)

c. Plastic Color :


B : black



d. Plastic material

P : P.B.T


VERSION & EC DESCRIPTION

| DATE | VERSION | PAGE | DESCRIPTION |
|------------|---------|------|----------------------------|
| 2004/07/19 | A | 2-3 | Add ICS254-XX1 Series Plan |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | | |
|---|-----------|------------------------|---|--|
| GENERAL TOLERANCE X. ± .XX ± .XX ± .XXX ± | DRAW DATE | 2004/07/19 H. D. LI | PART NO | ICS254-XX1-1-BP |
| | DESIGN | H. D. LI | TITLE | 2.54 IC Socket XXPIN 寬 |
| | CHECKED | Y. M. LU | | |
| UNIT :mm | APPROVED | J. F. KANG | | |
| | | |  | 宏揚精密有限公司 HOJAR PRECISION CO. : LTD. |

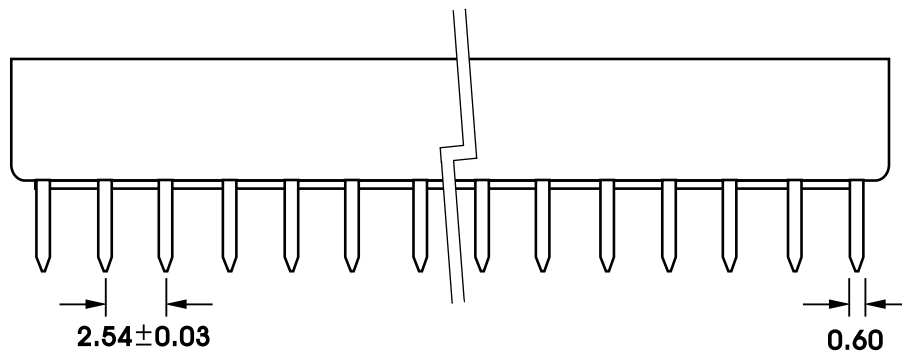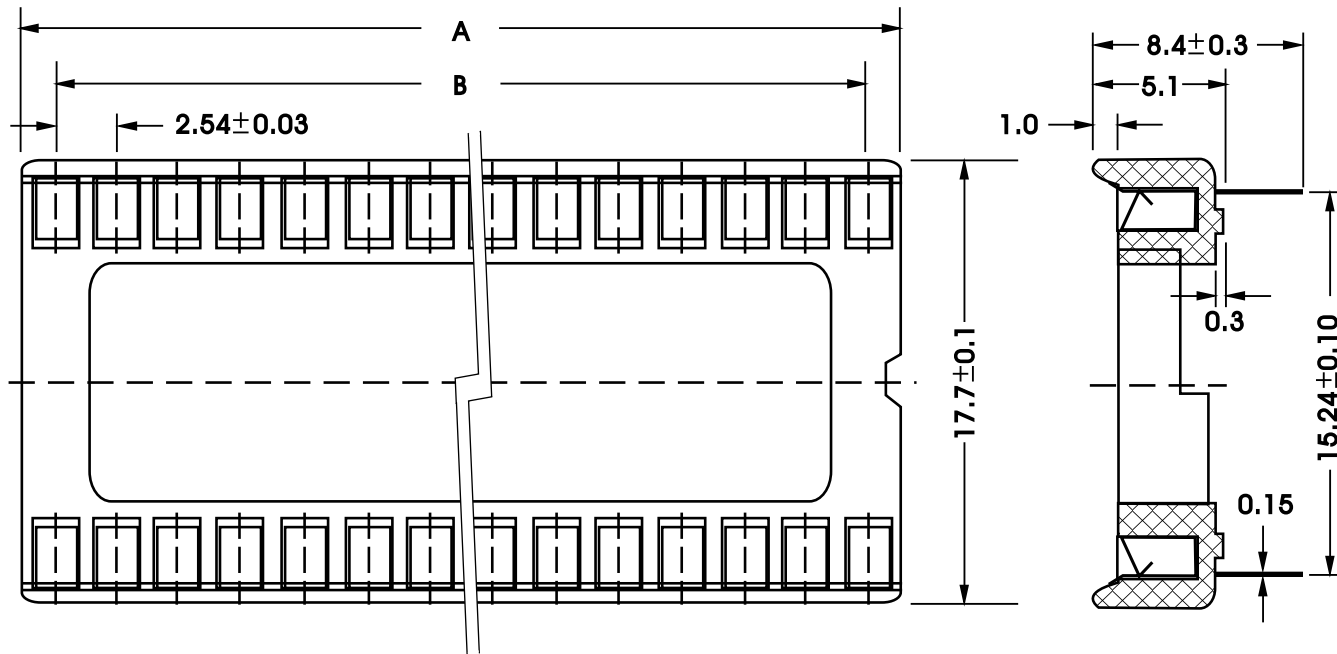

| PITCH | A ± 0.00 0.15 | B ± 0.10 |
|-------|----------------------|--------------|
| 24 | 30.48 | 27.94 |
| 28 | 35.56 | 33.02 |
| 32 | 40.64 | 38.10 |
| 40 | 50.80 | 48.26 |
| 42 | 53.34 | 50.80 |
| 48 | 60.96 | 58.42 |

| | | |
|---|----------------------------------|---|
| GENAL TOLERANCE X. \pm .XX \pm .XX \pm .XXX \pm | DRAW 2004/07/19 DATE H. D. LI | PART NO ICS254-XX1-1-BP |
| | DESIGN H. D. LI | TITLE 2.54 IC Socket XXPIN 寬 |
| | CHECKED Y. M. LU | |
| | APPROVED J. F. KANG | |
| UNIT :mm | |  宏揚精密有限公司 HOJAR PRECISION CO., LTD. |