

一、膠芯

1.材質：PBT+玻璃纖維

2.顏色：黑色

二、端子

1.材質：磷銅

2.表面處理：端子表面鍍錫(100U" min)

3.瞬間止推力：每PIN至少0.5公斤

三、電性參數

1.電流：1mA

2.耐壓：AC 1000V 5S

3.絕緣：1000兆姆 500V DC

4.溫度：-55°C ~ +105°C

ORDER INFORMATION:

$$\text{ICS254} - \frac{\text{XX}}{\text{a}} \frac{2}{\text{b}} - 1 - \frac{\text{B}}{\text{c}} \frac{\text{P}}{\text{d}}$$

a. Pin of numbers:

6 ~ 32

b. Plastic Base :

1 : H= 7.62 mm(standard)

c. Plastic Color :


B : black

d. Plastic material

P : P.B.T

VERSION & EC DESCRIPTION



DATE	VERSION	PAGE	DESCRIPTION
2004/07/19	A	2-3	Add ICS254-XX2 Series Plan

GENAL TOLERANCE	DRAW DATE	2004/07/19 H. D. LI	PART NO
X. ±	DESIGN	H. D. LI	ICS254-XX2-1-BP
.X ±	CHECKED	Y. M. LU	TITLE
.XX ±	APPROVED	J. F. KANG	2.54 IC Socket XXPIN 窄
.XXX ±			
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.


VERSION

A

Pitch 2.54mm ICS Socket Series H=7.62mm 2/2

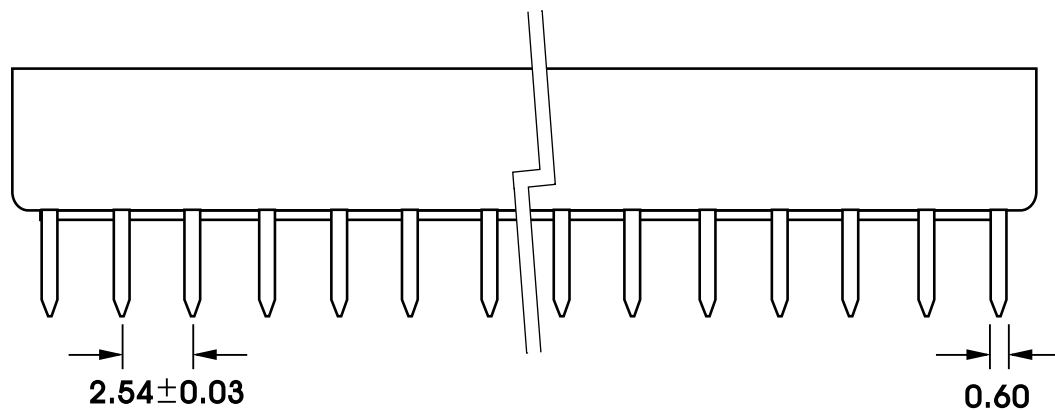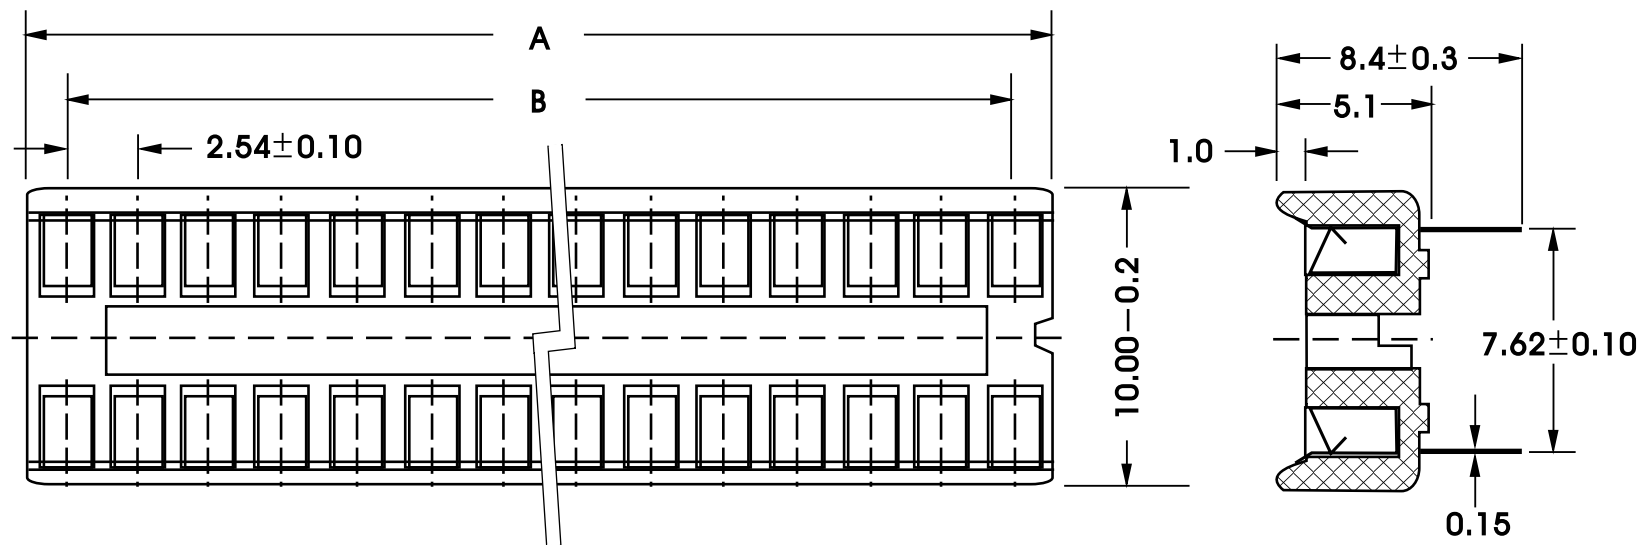

PITCH	A $\pm \begin{smallmatrix} 0.00 \\ 0.15 \end{smallmatrix}$	B ± 0.10
6	7.62	5.08
8	10.16	7.62
14	17.78	15.24
16	20.32	17.78
18	22.86	20.32
20	25.40	22.86
22	27.94	25.40
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10

GENAL TOLERANCE X. \pm .XX \pm .XXX \pm	DRAW DATE 2004/07/19 H. D. LI	PART NO ICS254-XX2-1-BP
	DESIGN H. D. LI	TITLE 2.54 IC Socket XXPIN 窄
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.