

SPECIFICATIONS

Rating Current : 1 amp continuous
 Contact Resistance : 30 Ohms(Max)
 Insulator Resistance : 1000 Ohms(Min)
 Dielectric Withstanding : 500 V/R.M.S
 Temperature Range : -65°C ~ +125°C
 Vibration : 1 micro second without interruption.
 Durability : 25 cycles

MATERIAL

Insulator : P.P.S UL-94V-0
 Contact : Phosphor Bronze
 Plating : Tin Alloy Plating

ORDER INFORMATION:


PLCC - $\frac{XX}{a}$ - $\frac{X}{b}$ - $\frac{X}{c}$



a.No. Of Pin :
20,28,32,44,52,68,84

b.Hosing Color :
1. Black
2. Belge


c. Pack :
T : Tube

VERSION & EC DESCRIPTION			
DATE	VERSION	PAGE	DESCRIPTION
2004/12/29	A	4-5	Add PLCC - XX - X - T Plan

GENERAL TOLERANCE	DRAW DATE	2004/12/29 H. D. LI	PART NO
X. ±	DESIGN	H. D. LI	PLCC - XX - X - X
.X ± 0.20	CHECKED	Y. M. LU	TITLE
.XX ± 0.15	APPROVED	J. F. KANG	PLCC Socket DIP XXPin
.XXX ± 0.05	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

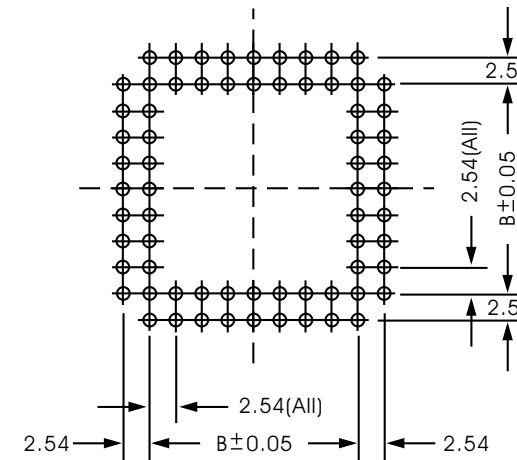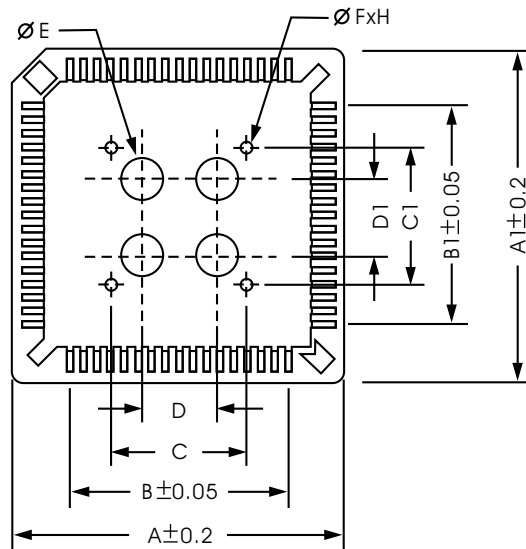

RECOMMENDED P.C.B LAYOUT

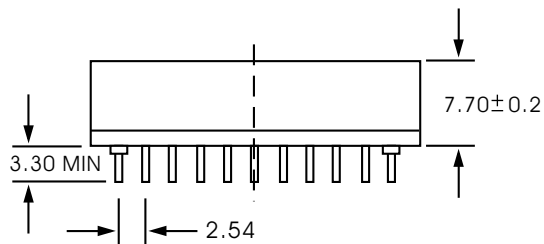

PIN	A±0.2	B±0.05	C	C1	D	D1	ØE	ØFxH	A1±0.2	B1±0.05
20	15.56	5.08	5.50	5.50			Ø 1.5(φ)	4-Ø1.0 x 1.0H	15.56	5.08
28	18.10	7.82	5.50	5.50			Ø 3.0(φ)	4-Ø1.0 x 1.0H	18.10	7.82
32	18.10	7.82	6.00	8.00			Ø 3.5(φ)	4-Ø1.0 x 1.0H	20.86	10.16
44	23.18	12.70	12.00	12.00	6.00	6.00	4-Ø3.0	4-Ø1.3 x 0.8H	23.18	12.70
52	25.72	15.24	12.50	12.50	7.00	7.00	4-Ø4.0	4-Ø1.5 x 0.8H	25.72	15.24
68	30.90	20.32	13.00	13.00	7.00	7.00	4-Ø5.0	4-Ø1.5 x 1.0H	30.90	20.32
84	36.00	25.40	18.00	18.00	9.00	9.00	4-Ø6.0	4-Ø1.5 x 0.8H	38.00	25.40

GENERAL TOLERANCE X. ± 0.20 .XX ± 0.15 .XXX ± 0.05	DRAW DATE 2004/12/29 H. D. LI	PART NO PLCC - XX - X - X
	DESIGN H. D. LI	TITLE PLCC Socket DIP XXPin
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	宏揚精密有限公司 HOJAR PRECISION CO., LTD.