

SPECIFICATIONS

Rating Current : 1. 0A, AC

Contact Resistance : 20m Ω Max

Insulator Resistance : 1000M Ω Min

Dielectric Withstanding : 600VAC(RMS), 60Hz ,one minute Hold

Temperature Range : -55°C ~ +125°C

MATERIAL

Insulator : PPS

Contact : Phosphor Bronze

Plating : N : Tin Plating over Nickle

ORDER INFORMATION:

SPLCC - $\frac{XX}{a}$ - $\frac{X}{b}$

a.No. Of Pin :

20,28,32,44,52,68,84


b. Pack :




T : Tube

R : Reel



VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/10/18	A	2-3	Add SPLCC - XX Plan

GENERAL TOLERANCE	DRAW DATE	2004/10/18 H. D. LI	PART NO
X. \pm	DESIGN	H. D. LI	SPLCC - XX - X
.X \pm 0.20	CHECKED	Y. M. LU	TITLE
.XX \pm 0.13	APPROVED	J. F. KANG	PLCC Socket SMT 20Pin
.XXX \pm 0.012	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

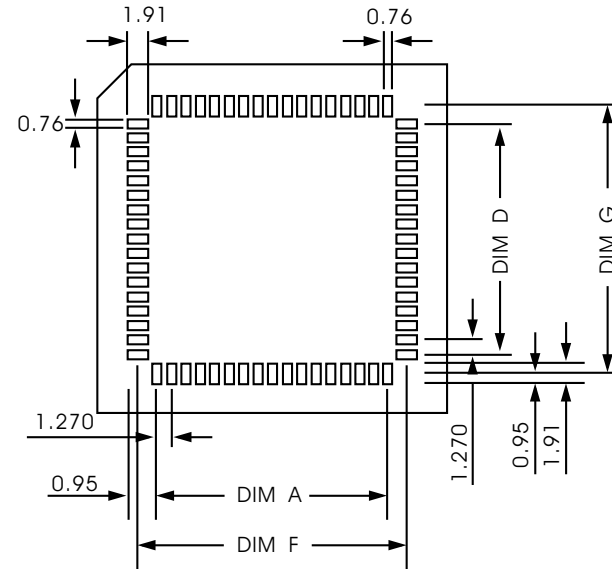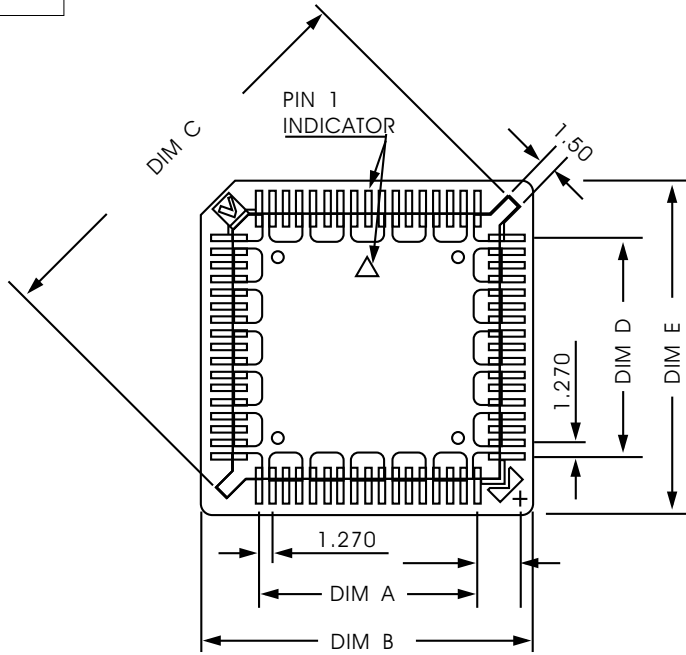

RECOMMENDED P.C.B LAYOUT

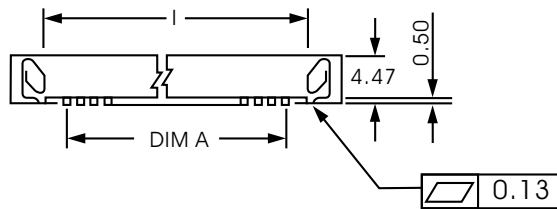

PIN	DIM A ±0.20	DIM B ±0.20	DIM C ±0.20	DIM D ±0.20	DIM E ±0.20	DIM F ±0.20	DIM G ±0.20	DIM I ±0.20	DIM J ±0.20
20	5.08	15.24	16.70	5.08	15.24	8.48	8.48	9.40	9.40
28	7.62	17.78	20.30	7.62	17.78	11.02	11.02	11.94	11.94
32	7.62	17.78	22.50	10.16	20.32	11.02	13.56	11.94	14.48
44	12.70	22.86	27.50	12.70	22.86	16.10	16.10	17.02	17.02
52	15.24	25.40	31.10	15.24	25.40	18.64	18.64	19.56	19.56
68	20.32	30.86	38.30	20.32	30.86	23.72	23.72	24.64	24.64
84	25.40	35.94	45.50	25.40	35.94	28.80	28.80	29.72	29.72

GENERAL TOLERANCE X. ± .XX ± 0.20 .XXX ± 0.13 .XXX ± 0.012	DRAW DATE 2004/10/18 H. D. LI	PART NO SPLCC - XX - X
	DESIGN H. D. LI	TITLE PLCC Socket SMT 20Pin
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	宏揚精密有限公司 HOJAR PRECISION CO., LTD.