


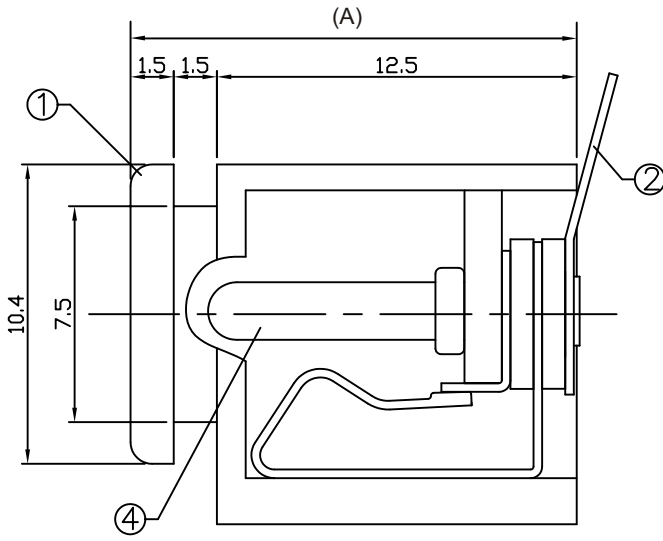


ORDER INFORMATION:


DC1 - 03J $\frac{X}{a}$ - $\frac{X}{b}$ - $\frac{A/B/C}{c}$ - $\frac{X}{d}$

- a. Center Pin Diameter:
A:2.0 \varnothing
B:2.5 \varnothing
- b. Post selection:
0: without post
- c. Length/Width/Height:
A/B/C (A=15.5,B=12.5,C=9.1) (standard)
- d. Pack selection:
B:Bag Pack

CAT. NO.	PIN	SCHEMATIC
DC1-022VA	$\varnothing 2.0$	
DC1-022VB	$\varnothing 2.5$	

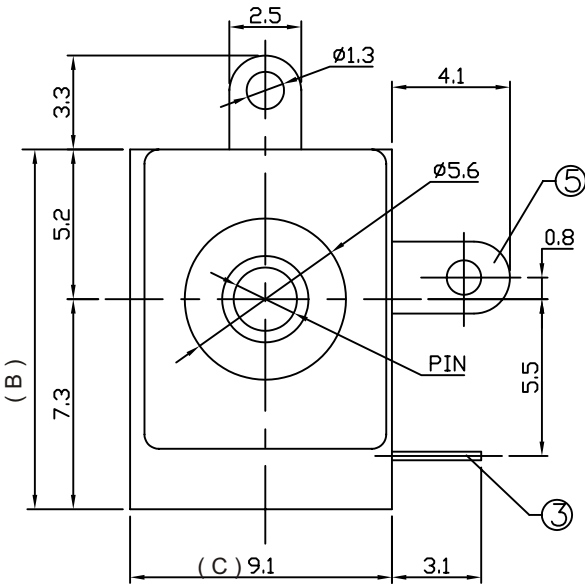

5	CURVE PIECE	1	C2680	MB:Cu Ag PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	SUS 301 STEEL	MB:Cu Ag PLATED
2	FLAT PIECE	1	C2680	MB:Cu Ag PLATED
1	HOUSING	1	PBT	
LTR	PART NAME	QTY	MATERIAL	REMARK

GENAL TOLERANCE ± 0.3	DRAW M. C. WANG	PART NO DC1-03JX-X-A/B/C-X
	DESIGN H. D. LI	TITLE DC POWER JACK (DIP)
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm		