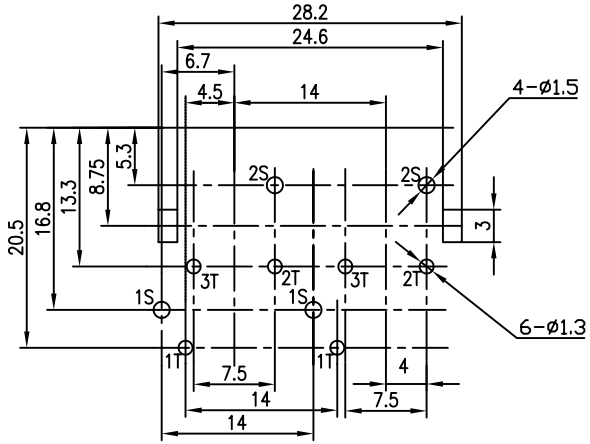

T:1.6 Dimensions of PC board holes

Tolerance : ±0.1(Printed-bottom view)

ORDER INFORMATION:

HRCA - 264 - $\underline{\text{ABCDEF}}_{a}$ -S1 - $\underline{\text{X}}_{b}$

a. Pin Color(A~F)

b. Pack selection:
D:Disk Pack

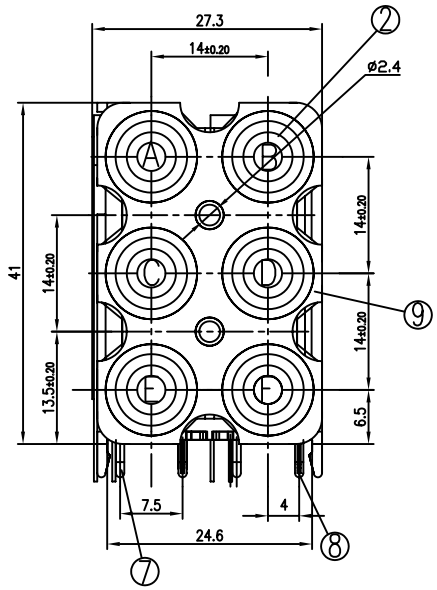

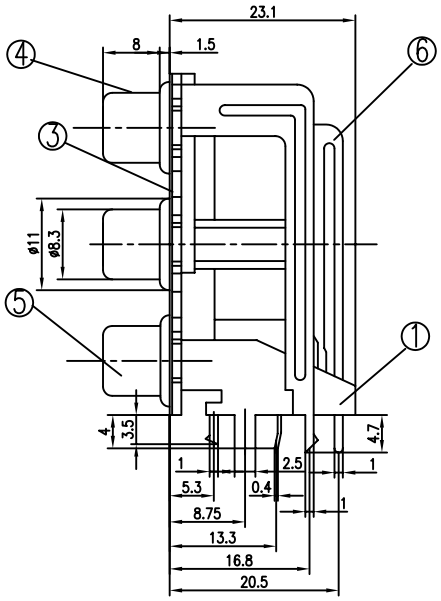

SCHEMATIC



LTR	PART NAME	QTY	MATERIAL	REMARK
9	SEALED PLATE	1	C2680 t=0.3	MB:Cu Cu/Sn PLATED
8	TERMINAL	2	C2680 t=0.3	MB:Cu Cu/Sn PLATED
7	TERMINAL	2	C2680 t=0.3	MB:Cu Cu/Sn PLATED
6	TERMINAL	2	C2680 t=0.3	MB:Cu Cu/Sn PLATED
5	OUTER CONTACT	2	C2680 t=0.3	MB:Cu Cu/Sn PLATED
4	OUTER CONTACT	2	C2680 t=0.3	MB:Cu Cu/Sn PLATED
3	COVER	2	ABS	UL-94HB
2	WASHER	6	ABS	UL-94HB
1	HOUSING	1	ABS	UL-94HB

GENAL TOLERANCE ± 0.3	DRAW M. C. WANG	PART NO	HRCA-264-ABCDEF-S1-X
	DESIGN H. D. LI	TITLE	PIN JACK
	CHECKED Y. M. LU		
UNIT :mm	APPROVED J. F. KANG		宏揚精密有限公司 HOJAR PRECISION CO., LTD.