

ORDER INFORMATION:

MMC046 - $\frac{10}{a}$ A - $\frac{X}{b}$

a. Pin number:


10





b. Pack :

D:Disk Pack

R: Reel Pack


MATERIAL:
 INSULATOR:HIGHT TEMPRATURE THERMOPLASTIC,
 UL94V-0,BLACK
 CONTACT:PHOSPHOR BRONZE
 PLATING:
 CONTACT AREA: 10U" Au Plated OVER Ni
 SOLDER AREA: Tin Plated OVER Ni

GENAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	DRAW	PART NO
	M. C. WA	MMC046-10A-X
	DESIGN	TITLE
	M. C. WA	MMCmicro Push-Push Connector
	CHECKED	
	Y. M. LU	
	APPROVED	
UNIT :mm	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

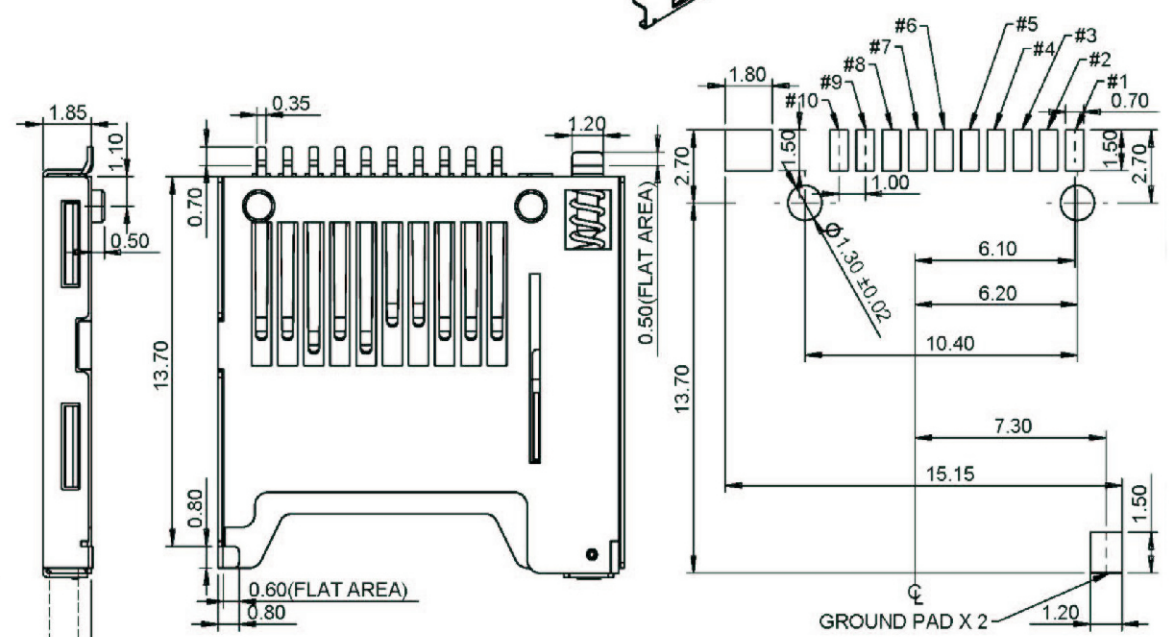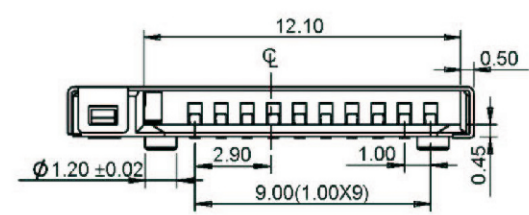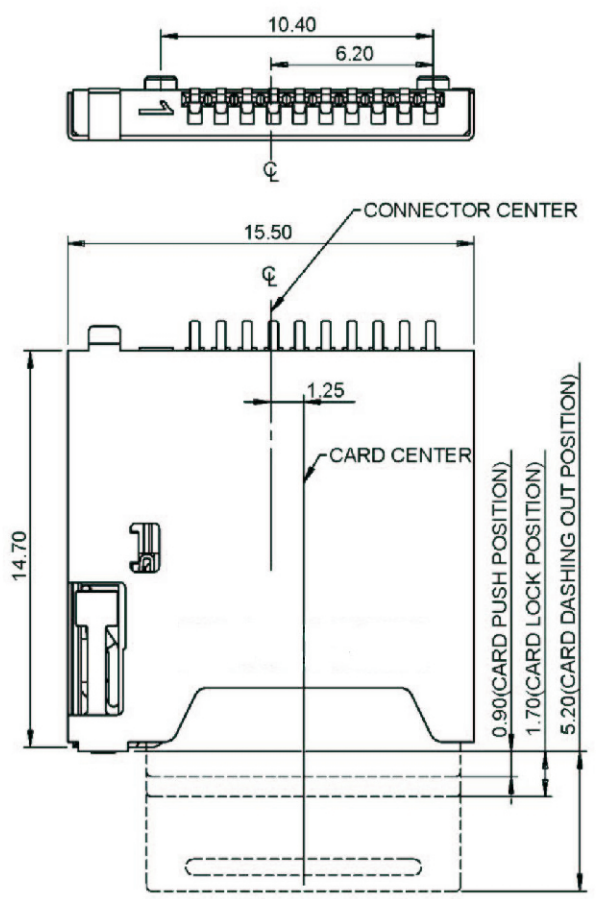

Pin Assignment:

#1	DTA2
#2	DAT3
#3	CMD
#4	CD
#5	VDD ₁
#6	VDD ₂
#7	CLK
#8	VSS ₂
#9	DAT0
#10	DAT1

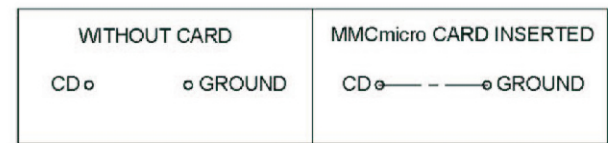

GENERAL TOLERANCE .X ± 0.30 .XX ± 0.20 .XXX ± 0.10	DRAW M. C. WA	PART NO MMC046-10A-X
	DESIGN M. C. WA	TITLE MMCMicro Push-Push Connector
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	宏揚精密有限公司 HOJAR PRECISION CO., LTD.