
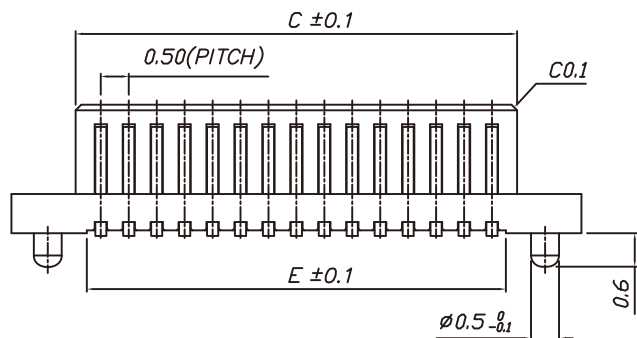



VERSION

A

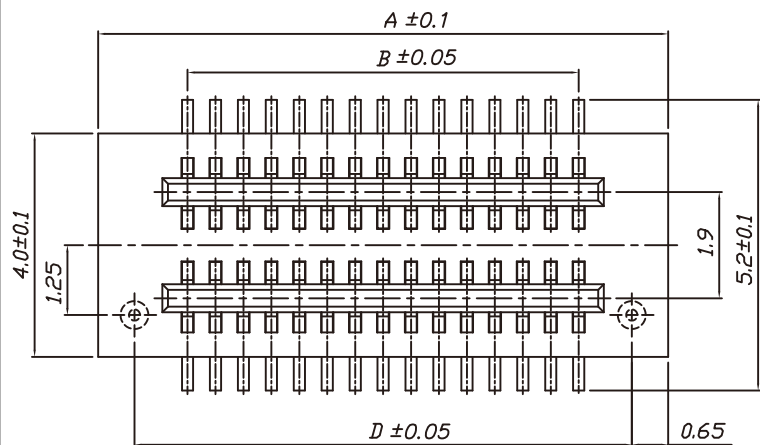


	A	B	C	D	E		A	B	C	D	E
10P	5.20	2.00	2.90	3.90	2.50	36P	11.70	8.50	9.40	10.40	9.00
12P	5.70	2.50	3.40	4.40	3.00	38P	12.20	9.00	9.90	10.90	9.50
14P	6.20	3.00	3.90	4.90	3.50	40P	12.70	9.50	10.40	11.40	10.00
16P	6.70	3.50	4.40	5.40	4.00	42P	13.20	10.00	10.90	11.90	10.50
18P	7.20	4.00	4.90	5.90	4.50	44P	13.70	10.50	11.40	12.40	11.00
20P	7.70	4.50	5.40	6.40	5.00	46P	14.20	11.00	11.90	12.90	11.50
22P	8.20	5.00	5.90	6.90	5.50	48P	14.70	11.50	12.40	13.40	12.00
24P	8.70	5.50	6.40	7.40	6.00	50P	15.20	12.00	12.90	13.90	12.50
26P	9.20	6.00	6.90	7.90	6.50	60P	17.70	14.50	15.50	16.40	15.00
28P	9.70	6.50	7.40	8.40	7.00	70P	20.20	17.00	18.00	18.90	17.50
30P	10.20	7.00	7.90	8.90	7.50	80P	22.70	19.50	20.50	21.40	20.00
32P	10.70	7.50	8.40	9.40	8.00	90P	25.20	22.00	23.00	23.90	22.50
34P	11.20	8.00	8.90	9.90	8.50	100P	27.70	25.40	25.50	26.40	25.00

SHPD16 - XXX - XX - BN - X - 1

a b c d e f

- a. Pin of numbers:
8~100
- b. Pastic Thick
NO.
- c. Plated selection :
1 : Gold Flash
- d. Post selection :
0 : Without Post
1 : With Post
- e. Plastic Color :
W : White
B : black
- f. Pack selection:
T : Tube Pack
R : Reel Pack

NO.	HIGH	SOCKET(H)	PLUG(H)
1	3.0	2.2	0.8
2	3.5	2.2	1.3
3	4.0	3.0	1.0
4	4.5	3.5	1.0
5	5.0	3.0	2.0
6	5.5	3.5	2.0
7	6.0	4.0	2.0
8	6.5	4.5	2.0

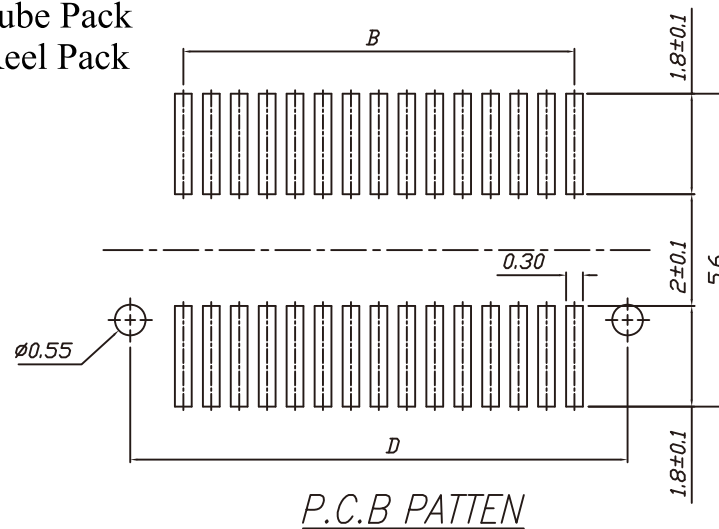

GENERAL TOLERANCE X. ± 0.5 .XX ± 0.3 .XXX ± 0.25 .XXX ± 0.05	DRAW DATE	2004/07/14 H. D. LI	PART NO	SHPD6 - XX2 - XX-BN-X
	DESIGN	H. D. LI	TITLE	0.5 2XX 母座 H=1.15 SMD 白 NYLON46
	CHECKED	Y. M. LU		
	APPROVED	J. F. KANG		
UNIT :mm			宏揚精密有限公司 HOJAR PRECISION CO., LTD.	