
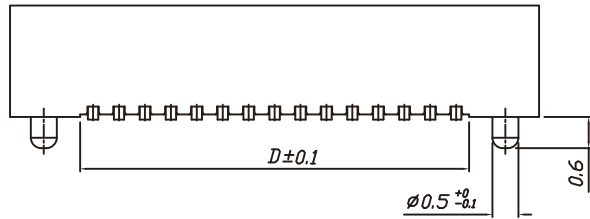


VERSION
A


SHFD6 - XXX - XX -BN - X - 1  
a b c d e f

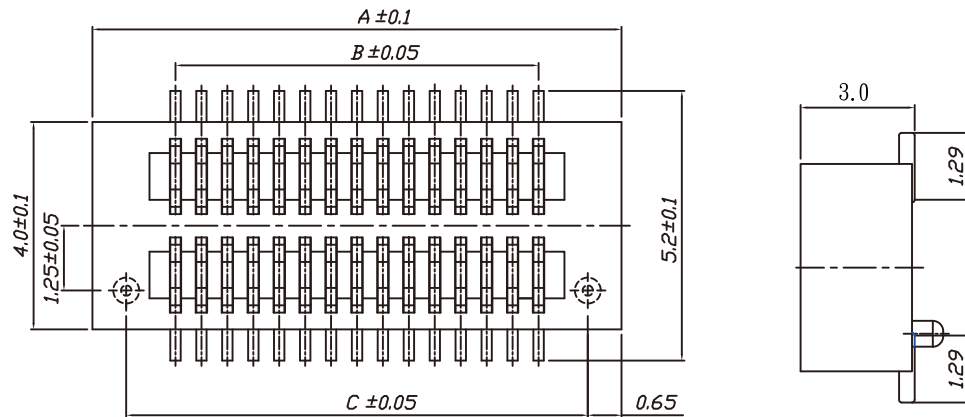

	A	B	C	D		A	B	C	D	
08P	4.70	1.50	3.40	2.00		36P	11.70	8.50	10.40	9.00
10P	5.20	2.00	3.90	2.50		38P	12.20	9.00	10.90	9.50
12P	5.70	2.50	4.40	3.00		40P	12.70	9.50	11.40	10.00
14P	6.20	3.00	4.90	3.50		42P	13.20	10.00	11.90	10.50
16P	6.70	3.50	5.40	4.00		44P	13.70	10.50	12.40	11.00
18P	7.20	4.00	5.90	4.50		46P	14.20	11.00	12.90	11.50
20P	7.70	4.50	6.40	5.00		48P	14.70	11.50	13.40	12.00
22P	8.20	5.00	6.90	5.50		50P	15.20	12.00	13.90	12.50
24P	8.70	5.50	7.40	6.00		60P	17.70	14.50	16.40	15.00
26P	9.20	6.00	7.90	6.50		70P	20.20	17.00	18.90	17.50
28P	9.70	6.50	8.40	7.00		80P	22.70	19.50	21.40	20.00
30P	10.20	7.00	8.90	7.50		90P	25.20	22.00	23.90	22.50
32P	10.70	7.50	9.40	8.00		100P	27.70	25.40	26.40	25.00
34P	11.20	8.00	9.90	8.50						

- a. Pin of numbers:  
8~100
- b. Pastic Thick  
NO.
- c. Plated selection :  
1 : Gold Flash
- d. Post selection :  
0 : Without Post  
1 : With Post
- e. Plastic Color :  
W : White  
B : black
- f. Pack selection:  
T : Tube Pack  
R : Reel Pack

NO.	HIGH	SOCKET(H)	PLUG(H)
1	3.0	2.2	0.8
2	3.5	2.2	1.3
3	4.0	3.0	1.0
4	4.5	3.5	1.0
5	5.0	3.0	2.0
6	5.5	3.5	2.0
7	6.0	4.0	2.0
8	6.5	4.5	2.0

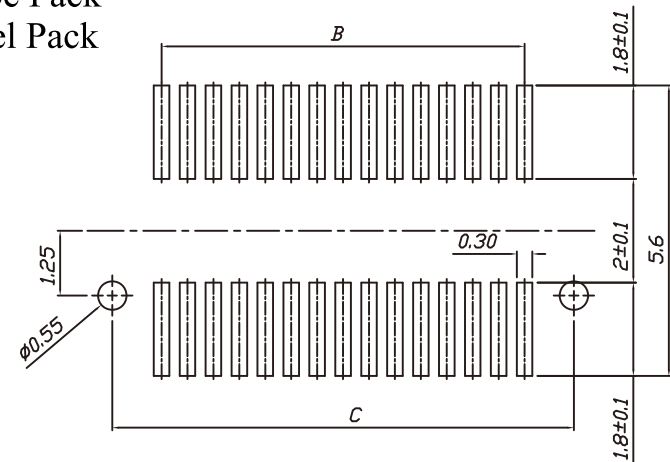

P.C.B PATTEN

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.3 .XXX ± 0.25 .XXX ± 0.05	DRAW 2004/07/14 DATE H. D. LI	PART NO SHFD6 - XX2 - XX-WN-X
	DESIGN H. D. LI	TITLE 0.5 2xXX 母座 H=1.15 SMD 白 NYLON46
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		宏揚精密有限公司 HOJAR PRECISION CO. : LTD.