

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : Nylon 6T.

Terminal : Brass 65/35


ORDER INFORMATION:

SHPS12 - $\frac{XX}{a} \frac{1}{b} - \frac{XX}{c} \frac{X}{d} - \frac{A}{B} \frac{X}{e} - \frac{X}{f} \frac{X}{g} - \frac{X}{h}$


- a. Pin of numbers:
03 ~ 40
- b. Plastic Base:
1 : H=2.0mm(standard)
2 : H=1.5mm
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u" Gold
3 : Gold 15u" Gold
4 : Gold 30u" Gold
- d. Option Post
1 : A Type
2 : B Type
- e. Pin length:
if you desire on other length, by marking
put desired length the A / B.
(Standard:4.0/2.7)
- f. Plastic Color :
B : black
- g. Plastic Material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon
*H=2.00mm P.B.T
- h. Pack Selection :
B : Bag Pack (standard)

VERSION & EC DESCRIPTION





DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	6-7	Add SHPS12-XXX Series Plan
2005/05/22	A	6	Add Pack : Bag

GENERAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	SHPS12-XX1-XX -A / B-XX-X
.X ± 0.38	CHECKED	Y. M. LU	TITLE
.XX ± 0.25	APPROVED	J. F. KANG	2.0 1xXX 排針 黑 NYLON
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.


D Of Order Information Code = 1 (A TYPE)

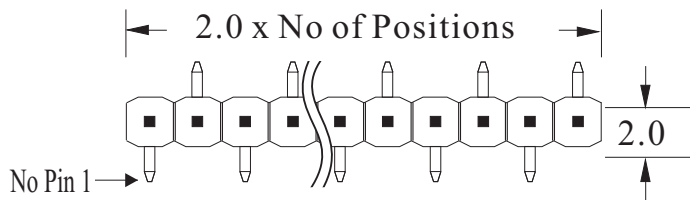


D Of Order Information Code = 2 (B TYPE)

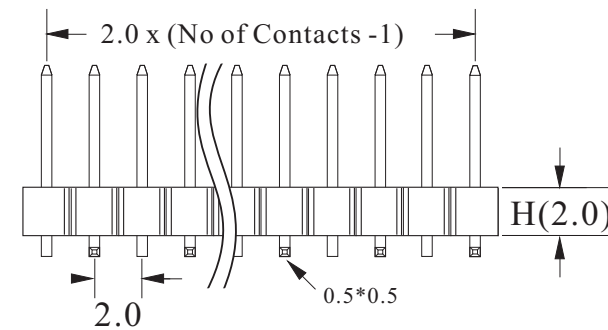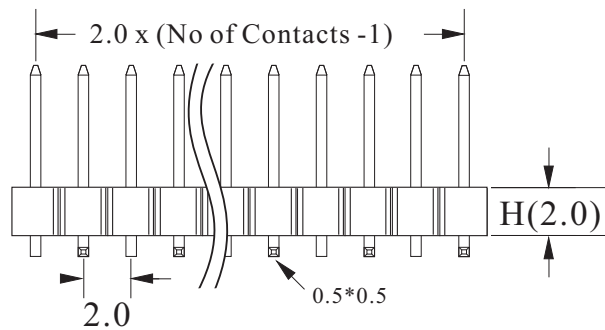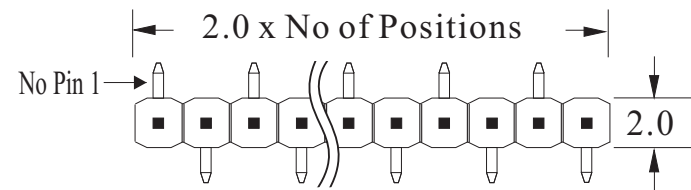


Recommended P.C.Board Hole Layout :

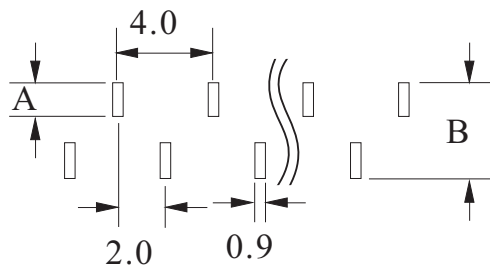

Recommended P.C.Board Hole Layout :

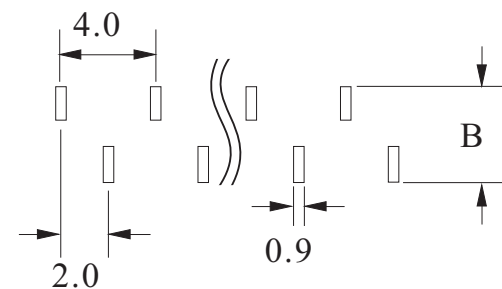

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2004/03/26 DATE H. D. LI	PART NO SHPS12-XX1-XX -A / B-XX-X
	DESIGN H. D. LI	TITLE 2.0 1xXX 排針 黑 NYLON
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.