


MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS



SPECIFICATION
CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 1000V RMS

ORDER INFORMATION:



HPSR11 - $\frac{XX}{a}$ $\frac{A}{b}$ - $\frac{X}{c}$ $\frac{X}{d}$ - $\frac{A}{e}$ / $\frac{C}{f}$ / $\frac{B}{g}$ - $\frac{XX}{h}$ - $\frac{X}{h}$


- a. Pin of numbers:
02 ~ 40
- b. Plastic Base :
A : H=2.54mm(standard)
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Post selection :
0 : Without Post
- e. Pin length :
if you desire on other length, by marking
put desired length the A / C / B.
(Standard:X.X/X.X/X.X)
- f. Plastic Color :
B : black
- g. Plastic material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon 6T
- h. Pack selection:
C : Contron Pack
B : Bag Pack

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW H. D. LI	PART NO HPSR11 - XXA - XX - A/C/B-XX-X
	DESIGN H. D. LI	TITLE 2.54 1xXX A/C/B DIP 90度 黑 P.B.T 11型
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm		

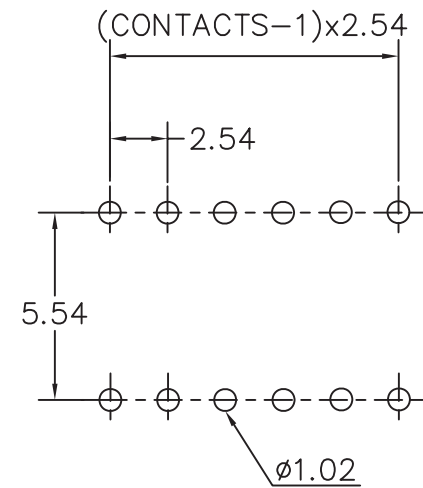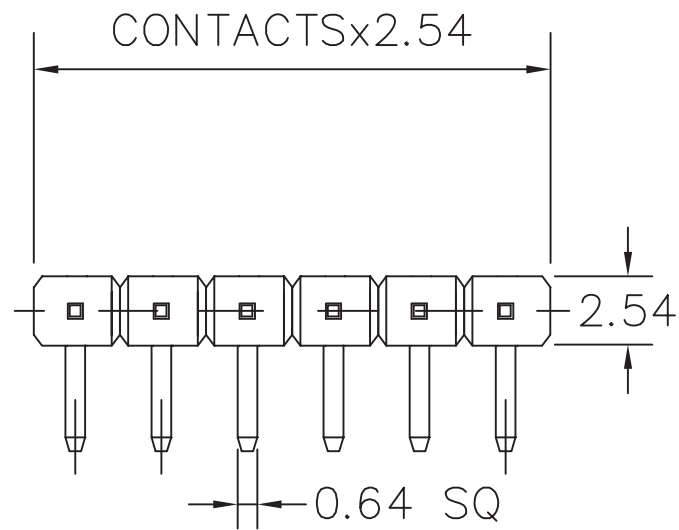

RECOMMENDED P.C.B LAYOUT

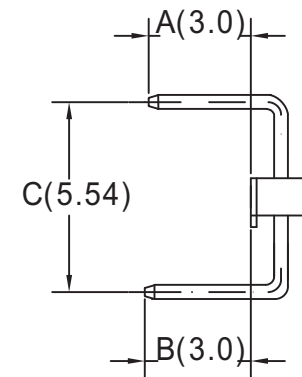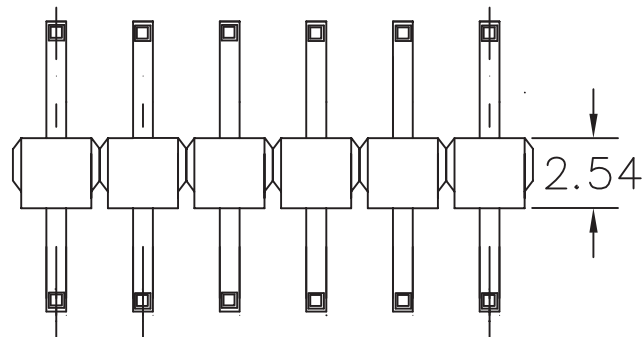

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW	PART NO
	H. D. LI	HPSR11 - XXA - XX - A/C/B-XX-X
	DESIGN	TITLE
	H. D. LI	2.54 1xXX A/C/B DIP 90度 黑 P.B.T 17型
	CHECKED	
	Y. M. LU	
	APPROVED	
UNIT :mm	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.