

SPECIFICATIONS

Current : 1 A

Contact resistance : 20 Milliohms MAX

Insulator resistance : 5000 Megohms MIN

Withstand Voltage : 500 V AC MIN

Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : Thermoplastic UL94V-0



Contact : COPPER AOLOYS

ORDER INFORMATION:



HFS8 - $\frac{XX}{a} \frac{1}{b} - \frac{X0}{c} - \frac{X}{d} - \frac{XX}{e} - \frac{X}{f} - \frac{X}{g}$


- a. Pin of numbers :
03 ~ 25
- b. Plastic Base :
1 : H=2.05mm(standard)
- c. Plated selection :
0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold flash on Contact Area
6 : Duplex 5u"Gold on Contact Area
7 : Duplex 15u"Gold on Contact Area
8 : Duplex 30u"Gold on Contact Area
- d. Solder Pin Length :
1 : A=1.0mm (Standard)
- e. Plastic Color :
B : black
- f. Plastic material selection:
N : Nylon 6T
- g. Pack Selection :
C : Contron Pack
T : Tube Pack
D : Disk Pack

GENAL TOLERANCE	DRAW	PART NO
X. ± 0.50	H. D. LI	HFS8 - XX1 - X0 - X -XX-X
.X ± 0.38	DESIGN	H. D. LI
.XX ± 0.25	CHECKED	Y. M. LU
.XXX ± 0.15	APPROVED	J. F. KANG
UNIT :mm		TITLE 1.0 1xXX 母座 H=2.05 DIP 黑 NYLON
		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

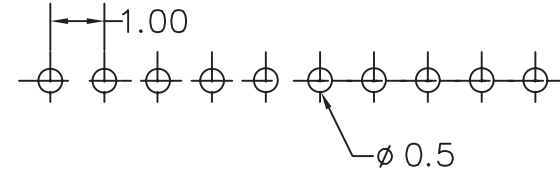

RECOMMENDED P.C.B LAYOUT

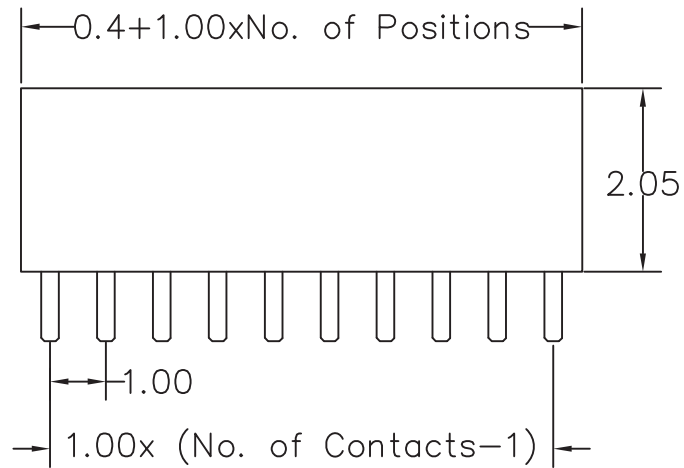

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW	H. D. LI	PART NO
	DESIGN	H. D. LI	HFS8 - XX1 - X0 - X - XX - X
	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	1.0 1xXX 母座 H=2.05 DIP 黑 NYLON
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.