

ORDER INFORMATION:

SPECIFICATIONS

Current rating : 1 Amps

Dielectric Withstanding : AC 500V

Contact resistance : 20 Milliohms Max.

Insulation resistance : 5000 Megohms Min.

Temperature range : - 40°C ~ + 105°C

MATERIAL :

Housing : High Temperature Thermoplastic


Terminal : Phosphor Bronze


SHFS4 - XX 1 - X X - X X - X
 a b c d e f g

- a. Pin of numbers :
03 ~ 50
- b. Plastic Base :
1 : H=4.60mm(Standard)
- c. Plated selection :
0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold flash on Contact Area
6 : Duplex 5u" Gold on Contact Area
7 : Duplex 15u" Gold on Contact Area
8 : Duplex 30u" Gold on Contact Area
9 : 10u" Gold on Contact Area
- d. Post selection :
1 : None post A Type
2 : None post B Type
3 : Outside post A Type
4 : Outside post B Type
5 : None post A Type + Cap
6 : None post B Type + Cap
7 : Outside post A Type + Cap
8 : Outside post B Type + Cap
- f. Plastic material selection:
L : L.C.P.
N : Nylon 6T.
N9 : Nylon 9T(E).
- g. Pack Selection :
C : Contron Pack
T : Tube Pack
- e. Plastic Color :
W : white
B : black



VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/07/23	A	6-7	Add SHFS4-XX1 Plan
2004/07/26	B	6-7	Revise SHFS4-XX1 Plan
2004/08/12	B	6	Add Material : N1
2004/08/21	B	7	Revise Products Plan
2004/12/24	B	6	Revise Material : N1 => N9
2005/02/22	B	6	Add Pack : Contron & Tube


GENAL TOLERANCE	DRAW DATE	2004/07/23 H. D. LI	PART NO
X. ± 0.38	DESIGN	H. D. LI	SHFS4-XX1-XX-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE 1/2
.XX ± 0.25	APPROVED	J. F. KANG	Pitch:1.27mm Single Row Female Header SMD Series
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

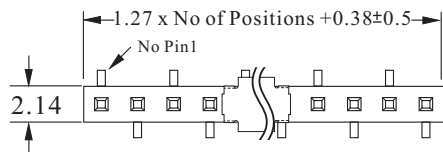

B Type




A Type

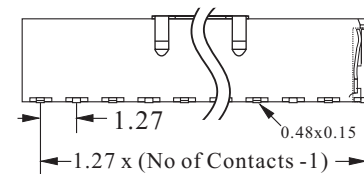


Recommended P.C.Board Hole Layout :


A Type

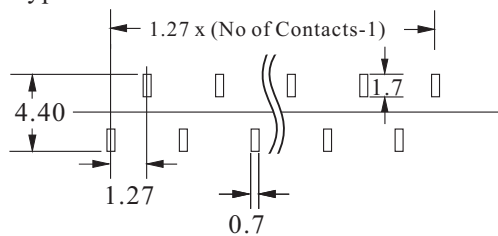

B Type

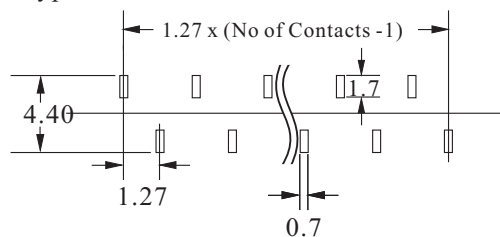

D Code=1、2

GENAL TOLERANCE X. ± 0.38 .X ± 0.30 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2004/07/23 H. D. LI	PART NO SHFS4-XX1-XX-XX-X
	DESIGN H. D. LI	TITLE 2/2 Pitch:1.27mm Single Row Female Header SMD Series
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.