

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 1A
OPERATING TEMPERATURE: -40°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
WITHSTAND VOLTAGE : 500 V AC MIN
NUMBER OF CONTACTS : 03 TO 50 CONTACTS


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/08/11	A	12-13	Add HFS5-XX1 Series Plan
2005/03/09	A	12-13	Add Pack : Contron 、 Tube 、 Reel

ORDER INFORMATION:



HFS5 - XX 1 - X 0 - X - BX - X
 a b c d e f


- a. Pin of numbers :
03 ~ 40
- b. Plastic Base :
1 : H=4.6mm(Standard)
- c. Plated selection :
0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold flash on Contact Area
6 : Duplex 5u" Gold on Contact Area
7 : Duplex 15u" Gold on Contact Area
8 : Duplex 30u" Gold on Contact Area
- d. Solder Pin Length :
1. D = 2.4mm
- e. Plastic material selection:
L : L.C.P. N : Nylon 6T.
- f. Pack Selection :
C : Contron Pack D: Disk Pack
T : Tube Pack B: Bag Pack

GENERAL TOLERANCE	DRAW DATE 2004/07/15 H. D. LI	PART NO HFS5-XX1-X0-X-BX-X
.X ± 0.38 .XX ± 0.25 ANG ± 5°	DESIGN H. D. LI	TITLE 1.27 1xXX 母座 H=4.6 DIP 黑 NYLON
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

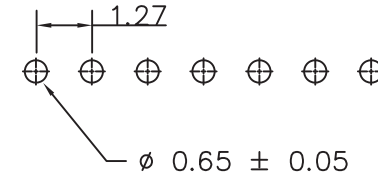

P.C.B . LAYOUT

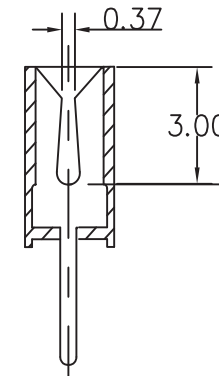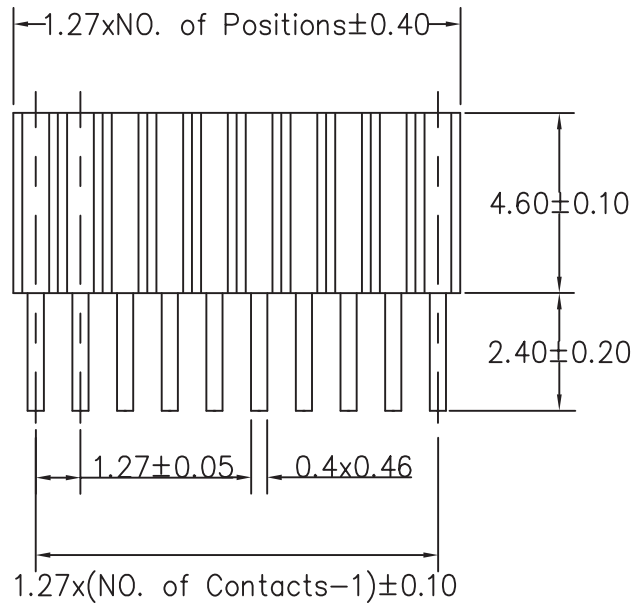

GENAL TOLERANCE	DRAW DATE	2004/07/15 H. D. LI	PART NO
	DESIGN	H. D. LI	HFS5-XX1-X0-X-BX-X
.X ± 0.38 .XX ± 0.25 ANG ± 5°	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	1.27 1xXX 母座 H=4.6 DIP 黑 NYLON
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.