

SPECIFICATIONS

Current rating : 1 Amps

Dielectric Withstanding : AC 300V

Contact resistance : 20 Milliohms Max.

Insulation resistance : 1000 Megohms Min.

Temperature range : - 40°C ~ + 105°C

MATERIAL :

Terminal : Phosphor Bronze


Insulator : Polyester, UL 94V-0

Standard : Nylon-6T

ORDER INFORMATION:

HFS5 - XX 2 - X 0 - B N - X
 a b c d


- a. Pin of numbers :
03 ~ 40
- b. Plastic Base :
2 : H=8.5mm(Standard)
- c. Plated selection :
0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold flash on Contact Area
6 : Duplex 5u" Gold on Contact Area
7 : Duplex 15u" Gold on Contact Area
8 : Duplex 30u" Gold on Contact Area
- e. Pack Selection :
D: Disk Pack

GENAL TOLERANCE	DRAW	PART NO
X. ± 0.50	H. D. LI	HFS5-XX2-X0-BN-X
.X ± 0.20	DESIGN	TITLE
.XX ± 0.10	H. D. LI	1.27 1xXX 母座 H=8.5 DIP 黑 NYLON
	CHECKED	
	Y. M. LU	
	APPROVED	
UNIT :mm	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.



VERSION


A

Pitch 1.27*2.54mm Single Row Female Series H=8.50mm 2/2

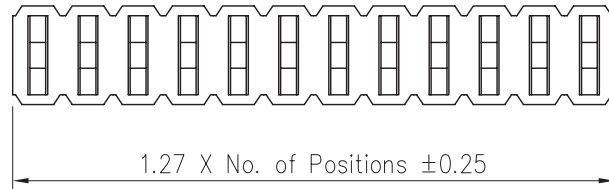

Recommended
P.C. Board Hole Layout

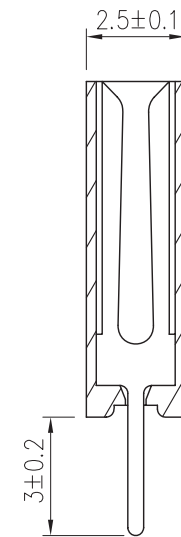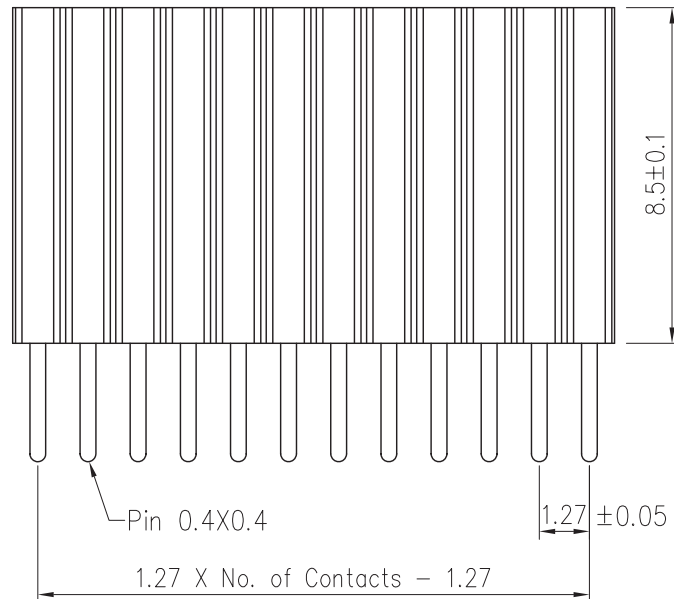

GENAL TOLERANCE X. ± 0.50 .X ± 0.20 .XX ± 0.10	DRAW H. D. LI	PART NO HF55-XX2-X0-BN-X
	DESIGN H. D. LI	TITLE 1.27 1xXX 母座 H=8.5 DIP 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.