

SPECIFICATIONS

Current rating : 3 Amps
 Dielectric Withstanding : AC/DC 600V
 Contact resistance : 20 Milliohms Max.
 Insulation Resistance : 1000 Megohms Min.
 Temperature range : - 40°C ~ + 105°C


MATERIAL :


Terminal : Phosphor Bronze

ORDER INFORMATION:




HFS1078 - XX A - X0 - X - XX - X
 a b c d e f g

- a. Pin of numbers: b. Pastic Thick :
 02 ~ 40 A: 6.8mm
- c. Plated selection:
 0 : Tin plated
 1 : Gold flash
 2 : 5u" Gold on Contact Area
 3 : 15u" Gold on Contact Area
 4 : 30u" Gold on Contact Area
 5 : Duplex Gold Flash on Contact Area
 6 : Duplex 5u" Gold on Contact Area
 7 : Duplex 15u" Gold on Contact Area
 8 : Duplex 30u" Gold on Contact Area
- d. Solder Pin length :
 1 : A=3.5mm
- e. Plastic Color :
 B : black color
- f. Plastic material selection:
 P : P.B.T (off料)
 E : P.B.T (新料)
- g. Pack selection:
 C : Contron Pack D : Disk Pack
 T : Tube Pack
 R : Reel Pack

GENAL TOLERANCE X. ± 0.38 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10	DRAW DATE H. D. LI	PART NO HFS1078-XXA-X0-X-XX-X
	DESIGN H. D. LI	TITLE 2.54 1xXX 母座 H=6.8 DIP 黑PBT
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO.,LTD.



Recommended P.C.Board
Hole Layout

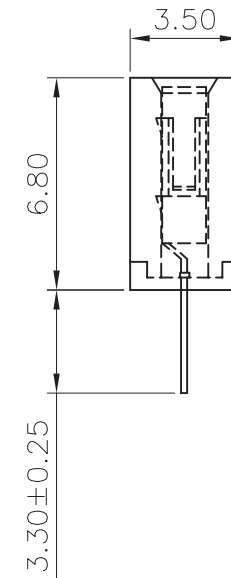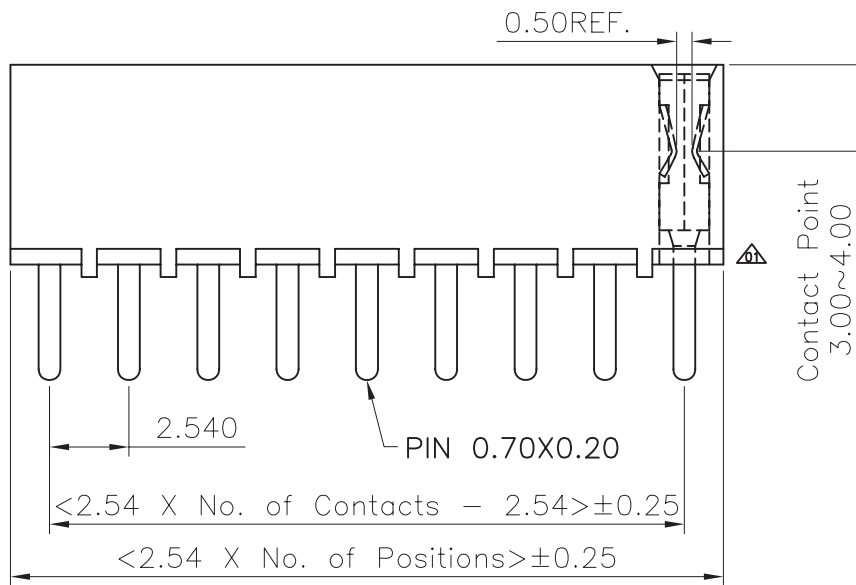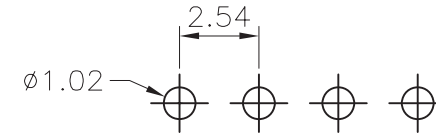

GENAL TOLERANCE	DRAW	PART NO
X. ± 0.38	DATE H. D. LI	HFS1078-XXA-X0-X-XX-X
.X ± 0.25	DESIGN H. D. LI	TITLE
.XX ± 0.15	CHECKED Y. M. LU	2.54 1xXX 母座 H=6.8 DIP 黑PBT
.XXX ± 0.10	APPROVED J. F. KANG	
UNIT :mm		宏揚精密有限公司 HOJAR PRECISION CO.,LTD.