

**ORDER INFORMATION:**

HPD17 -  $\frac{XX}{a}$   $\frac{3}{b}$  -  $\frac{XX}{c}$  -  $\frac{A/B}{d}$  -  $\frac{XX}{f}$  -  $\frac{X}{g}$  -  $\frac{X}{h}$


**MATERIAL**



HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**



CURRENT: 1A  
 OPERATING TEMPERATURE: -40°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 500V RMS


- a. Pin of numbers:  
4 ~ 100
- b. Plastic Base :  
3 : H=1.35 mm(standard)
- c. Plated selection :  
0 : Tin Plated  
1 : Gold Flash  
2 : Gold 5u"  
3 : Gold 15u"  
4 : Gold 30u"
- d. Post selection :  
0 : Without Post
- e. Pin length:  
if you desire on other length, by marking  
put desired length the A / B.  
( A/B=2.0/2.1 )
- f. Plastic Color :  
B : Black
- g. Plastic material selection:  
N : Nylon 6T
- h. Pack selection:  
C : Contron Pack  
B : Bag Pack  
T : Tube Pack  
R : Reel Pack

GENAL TOLERANCE	DRAW	PART NO
	H. D. LI	HPD17-XX3-XX-A/B-XX-X
.X ± 0.38 .XX ± 0.25 ANG ± 5°	DESIGN	TITLE
	H. D. LI	0.8mm Pin Header Dual Row DIP Type
	CHECKED	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
	Y. M. LU	
UNIT :mm	APPROVED	
	J. F. KANG	

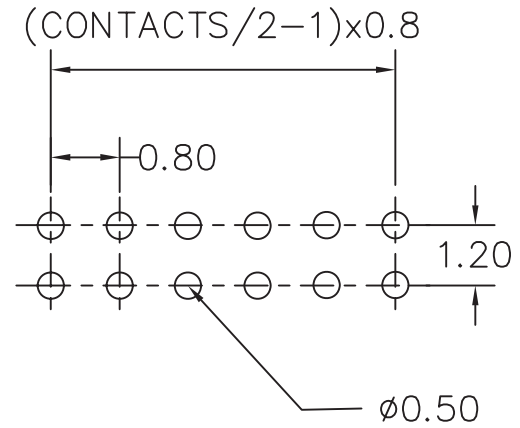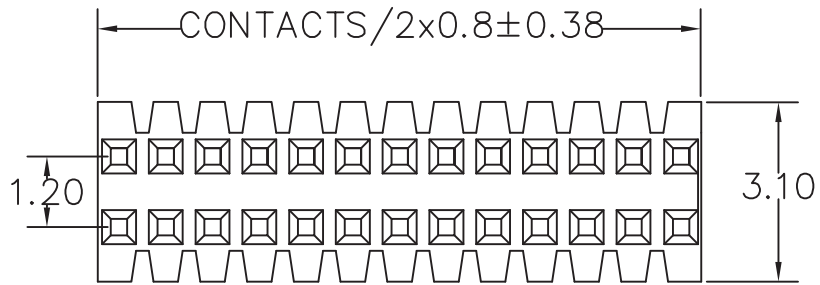

RECOMMENDED P.C.B LAYOUT

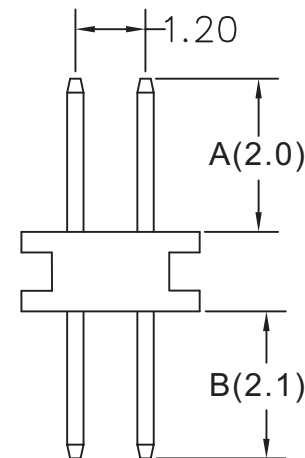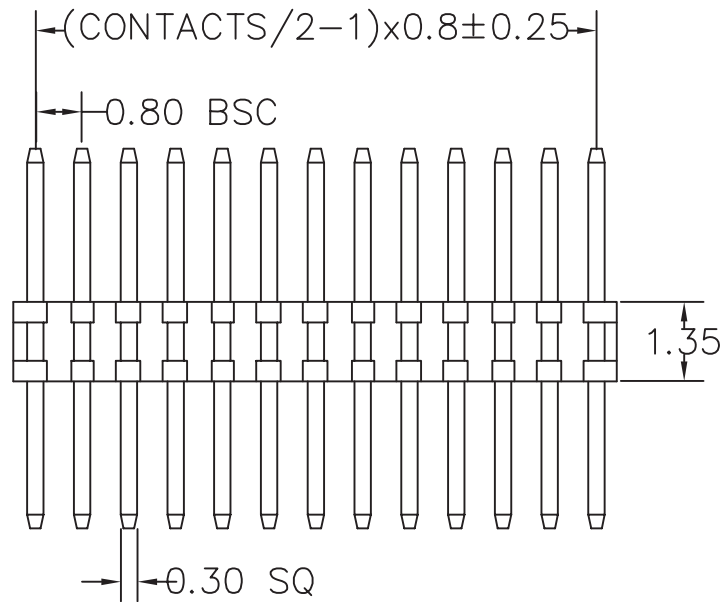

GENAL TOLERANCE	DRAW	PART NO
	H. D. LI	HPD17-XX3-XX-A/B-XX-X
.X ± 0.38	DESIGN	TITLE
.XX ± 0.25	H. D. LI	0.8mm Pin Header Dual Row DIP Type
ANG ± 5°	CHECKED	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
	Y. M. LU	
UNIT :mm	APPROVED	
	J. F. KANG	