

ORDER INFORMATION:

HPDR17 - $\frac{XX}{a}$ $\frac{3}{b}$ - $\frac{X}{c}$ $\frac{X}{d}$ - $\frac{A/B}{e}$ - $\frac{X}{f}$ $\frac{X}{g}$ - $\frac{X}{h}$


- a. Pin of numbers:
4 ~ 100
- b. Plastic Base :
3 : H=1.35 mm(standard)
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Post selection :
0 : Without Post
- e. Pin length:
if you desire on other length, by marking
put desired length the A / B.
(A/B=3.0/2.0)
- f. Plastic Color :
B : Black
- g. Plastic material selection:
N : Nylon 6T
- h. Pack selection:
C : Contron Pack
B : Bag Pack
T : Tube Pack
R : Reel Pack



MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS



SPECIFICATION

CURRENT: 1A
OPERATING TEMPERATURE: -40°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 500V RMS

GENAL TOLERANCE .X ± 0.38 .XX ± 0.25 ANG. ± 5°	DRAW H. C. SU	PART NO HPD17-XX3-XX-A/B-XX-X
	DESIGN H. C. SU	TITLE 0.8mm Pin Header Dual Row DIP TYPE90度
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

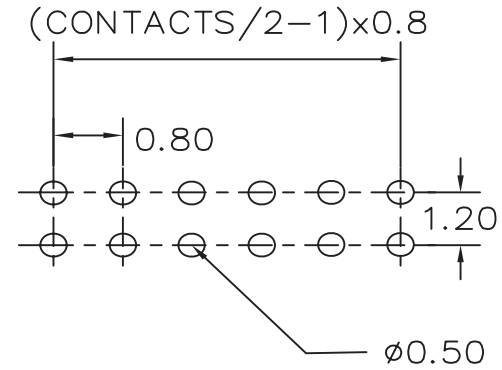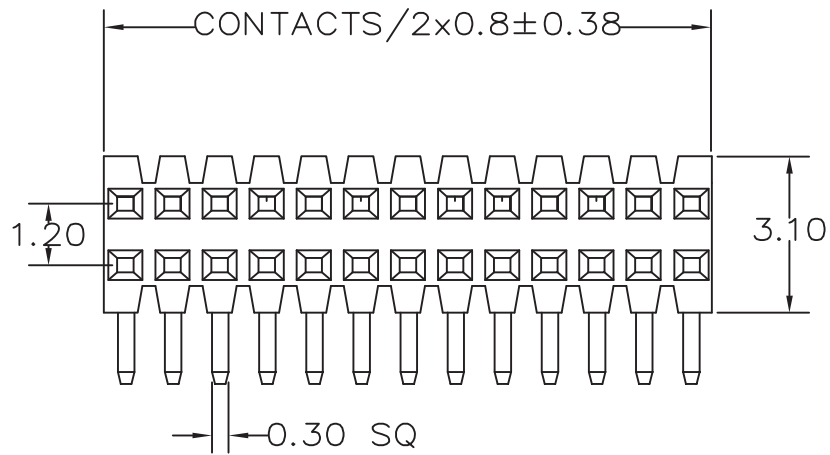

RECOMMENDED P.C.B LAYOUT

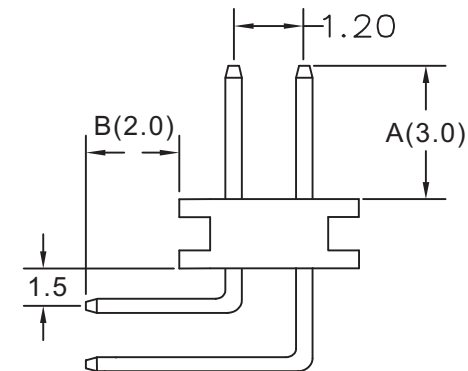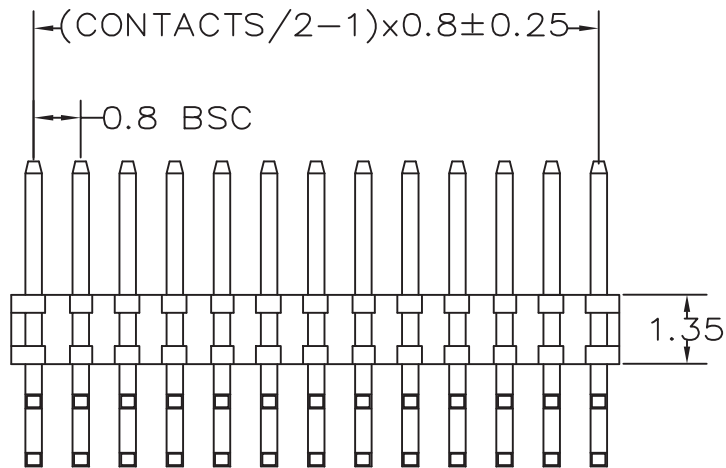

GENAL TOLERANCE	DRAW	PART NO
.X ± 0.38	H. C. SU	HPD17-XX3-XX-A/B-XX-X
.XX ± 0.25	DESIGN	TITLE
ANG. ± 5°	H. C. SU	0.8mm Pin Header Dual Row DIP TYPE90度
	CHECKED	
	Y. M. LU	
	APPROVED	
UNIT :mm	J. F. KANG	


 宏揚精密有限公司
 HOJAR PRECISION CO., LTD.