

VERSION

A

Pitch 1.00mm Double Plastic Double Row Pin Header SMD Type Series 1/2

ORDER INFORMATION:

SHPD28 - $\frac{XX}{a} \frac{X}{b} - \frac{XX}{c} \frac{X}{d} - \frac{A/B}{e} - \frac{XX}{f} - \frac{X}{h}$


MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
CONTACT: COPPER ALLOYS

SPECIFICATION

CURRENT:1A
OPERATING TEMPERATURE: -40°C TO+105°C
CONTACT RESISTANCE:20 MILLIOHMS MAX
INSULATION RESISTANCE:5000 MEGAOHMS MIN
WITHSTANDING VOLTAGE:AC 500V RMS



- a. Pin of numbers:
04 ~ 60
- b. Plastic Base :
1 : H=1.00 mm(standard)
2 : H=1.50 mm
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Post selection :
0 : Without Post
1 : With Post
2 : Without Post+CAP
3 : With Post+CAP
- e. Pin length:
if you desire on other length, by marking
put desired length the A / B.
(A/B=1.8/3.75)
- f. Plastic Color :
B : Black
- g. Plastic material selection:
L : L.C.P
N : Nylon 6T
- h. Pack selection:
C : Contron Pack
T : Tube Pack
R : Reel Pack

GENERAL TOLERANCE	DRAW DATE	2004/08/02 H. D. LI	PART NO
	DESIGN	H. D. LI	SHPD28 - XXX - XX - A/B - XX-X
.X ± 0.38 .XX ± 0.25 .XXX ± 0.13	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	1.0mm Pin Header Duble Row SMD Type
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.



VERSION


A

Pitch 1.00mm Double Plastic Double Row Pin Header SMD Type Series 2/2

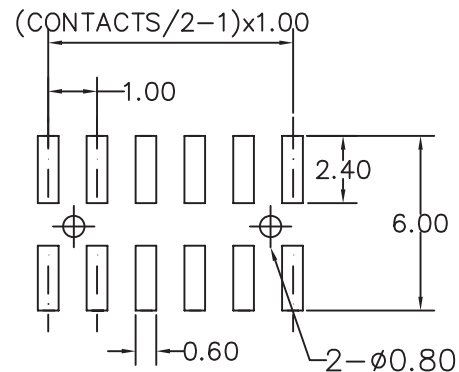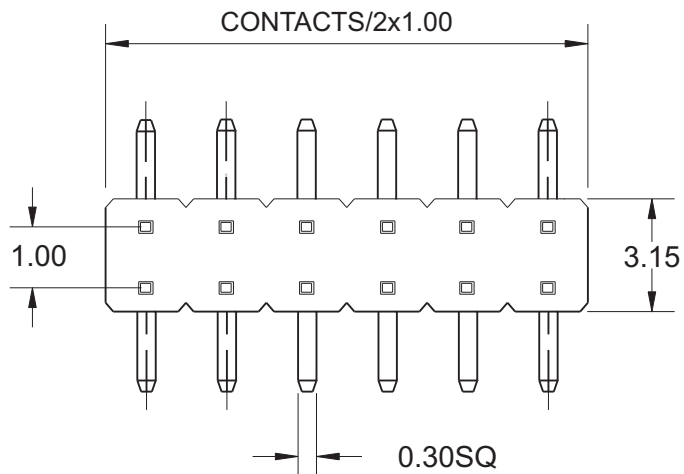

RECOMMENDED P.C. BLAYOUT

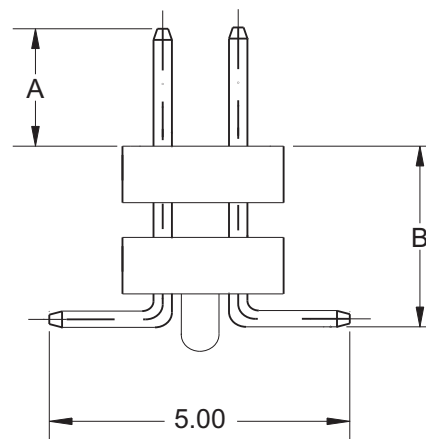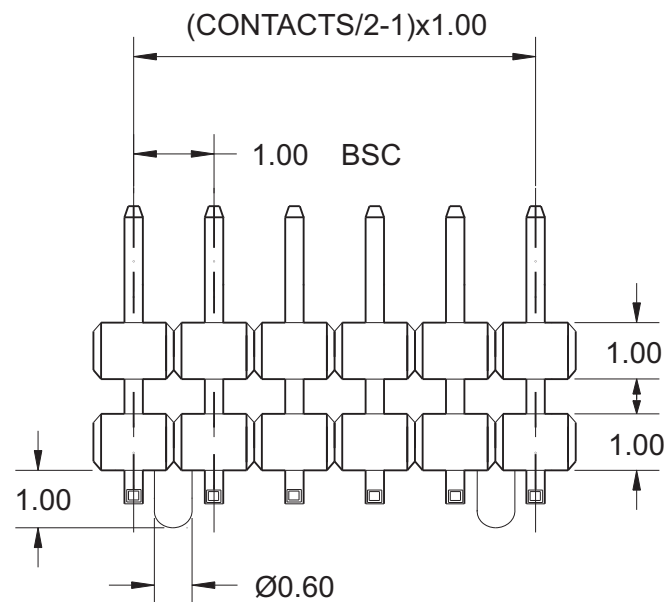

GENAL TOLERANCE X. ± .X ± 0.38 .XX ± 0.25 .XXX ± 0.13	DRAW 2004/08/02 DATE H. D. LI	PART NO SHPD28 - XXX - XX - A/B - XX-X
	DESIGN H. D. LI	TITLE 1.0mm Pin Header Duble Row SMD Type
	CHECKED Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
	APPROVED J. F. KANG	
UNIT :mm		