

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40 °C ~ +105 °C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

ORDER INFORMATION:

HPD14 - $\frac{XX}{a} \frac{X}{b} - \frac{X0}{c} - \frac{A}{d} / \frac{B}{e} - \frac{XX}{f} - \frac{X}{g}$

a. Pin of numbers:

02 ~ 100

b. Plastic Base

1 : H=1.0mm (Standard)

3 : H=1.5mm

4 : H=2.6mm

5 : H=2.0mm

c. 0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin Length :

if you desire on other length, by marking
put desired length the A / B.

(standard:3.0/2.3)

e. Plastic color :

W : White

B : Black

f. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

g. Pack selection:


C : Contron Pack




T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2000/09/01	A	2-3	Add HPD14-XXX Plan
2004/04/28	B	2-3	Add Material: LCP Revise Plan
2004/08/12	B	2	Add Material: N1
2004/12/24	B	2	Revise Material : N1 => N9
2005/03/09	B	2-3	Add Pack : Contron 、 Tube 、 Reel
2006/01/16	C	2-3	增加公差值 △

GENERAL TOLERANCE	DRAW DATE	2004/04/28 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HPD14-XXX-X0-A/B-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Row Pin Header Dip 180° Type Series
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

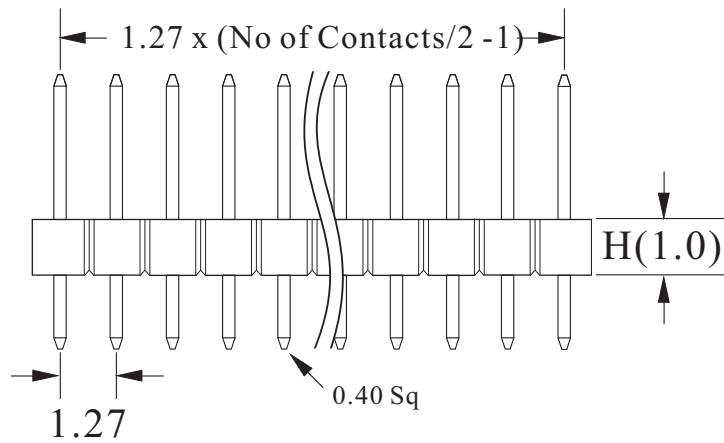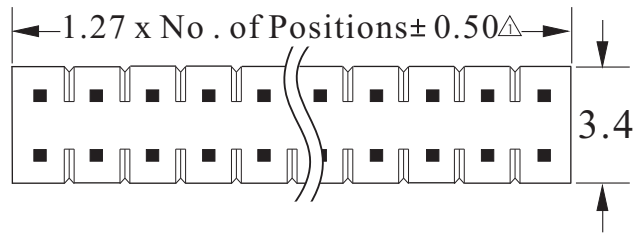

Recommended P.C.Board Hole Layout :

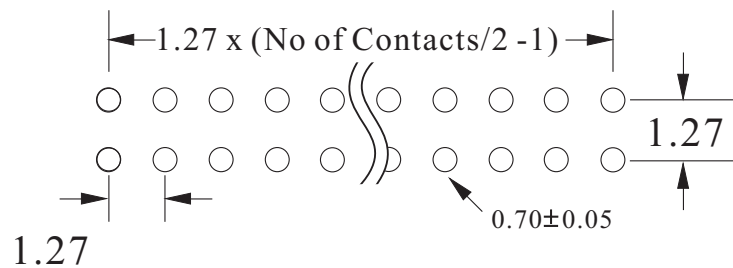

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE 2004/04/28 H. D. LI	PART NO HPD14-XXX-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Pin Header Dip 180° Type Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.