

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : - 40℃ ~ + 105℃

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(C2680)

ORDER INFORMATION:

$$\text{HPD14} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{X0}}{\text{c}} - \frac{\text{A}}{\text{d}} \frac{\text{B}}{\text{e}} \frac{\text{XX}}{\text{f}} - \frac{\text{X}}{\text{g}}$$

a. Pin of numbers:

02 ~ 100

b. Plastic Base

A : 1.0mm

B : 1.5mm

C : 2.0mm

c. 0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin Length :

if you desire on other length, by marking
put desired length the A / B.

(standard:3.0/2.3)

e. Plastic color :

W : White

B : Black

f. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

g. Pack selection:


C : Contron Pack




T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2005/05/05	A	20-21	Add HPD14-XXX Plan
2006/01/16	B	20-21	增加公差值 △

GENERAL TOLERANCE	DRAW DATE	2005/05/05	PART NO
X. ± 0.50	DATE	H. D. LI	HPD14-XX(A-C)-X0-A/B-XX-X
.X ± 0.30	DESIGN	H. D. LI	TITLE
.XX ± 0.20	CHECKED	Y. M. LU	Pitch:1.27x1.27mm Dual Row Pin Header Dip 180° Type Series
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

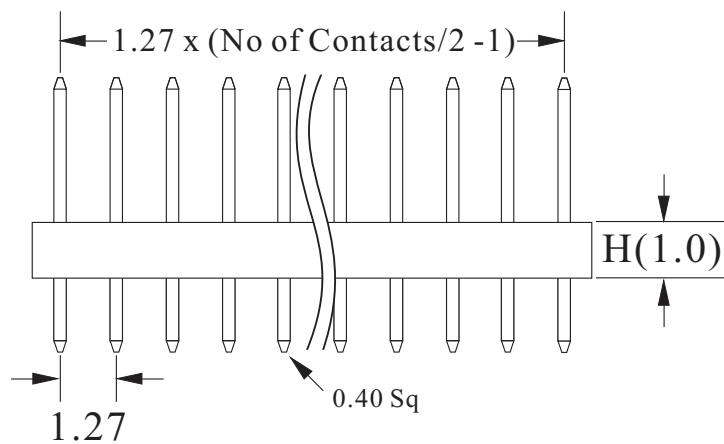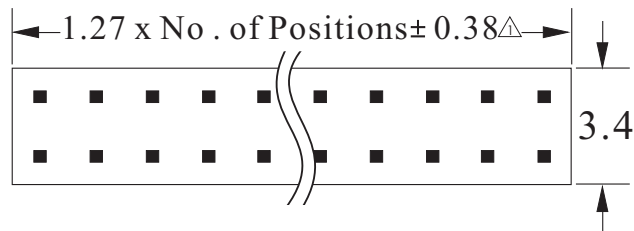

Recommended P.C.Board Hole Layout :

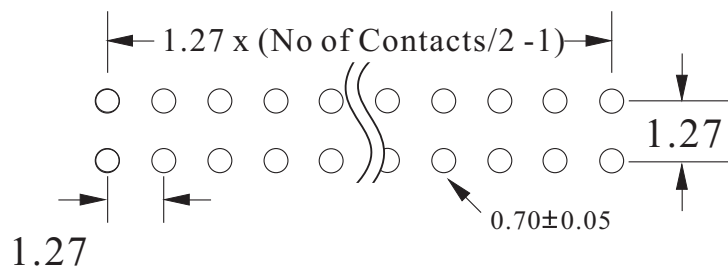

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW 2005/05/05 DATE H. D. LI	PART NO HPD14-XX(A-C)-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Pin Header Dip 180° Type Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.