

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(C2680)

ORDER INFORMATION:

$$\text{SHPD14} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{XX}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A}}{\text{e}} / \frac{\text{B}}{\text{f}} - \frac{\text{XX}}{\text{g}} \frac{\text{X}}{\text{h}}$$

a. Pin of numbers:

02 ~ 100

b. Plastic Base :

1 : H=1.0mm(standard)

3 : H=1.5mm

4 : H=2.6mm

5 : H=2.0mm

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Post selection :

0 : Without Post

1 : With Post 1.7mm

2 : With Post 1.4mm

3: Without Post CAP

4: With Post 1.4mm CAP

5: With Post 1.7mm CAP

e. Pin length :

if you desire on other length, by marking

put desired length the A / B.

(Standard:3.0/2.0)

f. Plastic Color :

W : white

B : black

g. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

h.Pack selection:


C : Contron Pack


T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2000/09/01	A	4-5	Add SHPD14-XXX Plan
2004/04/28	B	4-5	Add Material: LCP Revise Plan
2004/08/12	B	4	Add Material: N1
2004/12/24	B	4	Revise Material : N1 => N9
2005/03/09	B	4-5	Add Pack : Contron 、 Tube 、 Reel
2006/01/16	C	4-5	增加公差值△


GENAL TOLERANCE	DRAW DATE	2004/04/28 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	SHPD14-XXX-XX-A/B-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Row Pin Header SMD Type Series
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

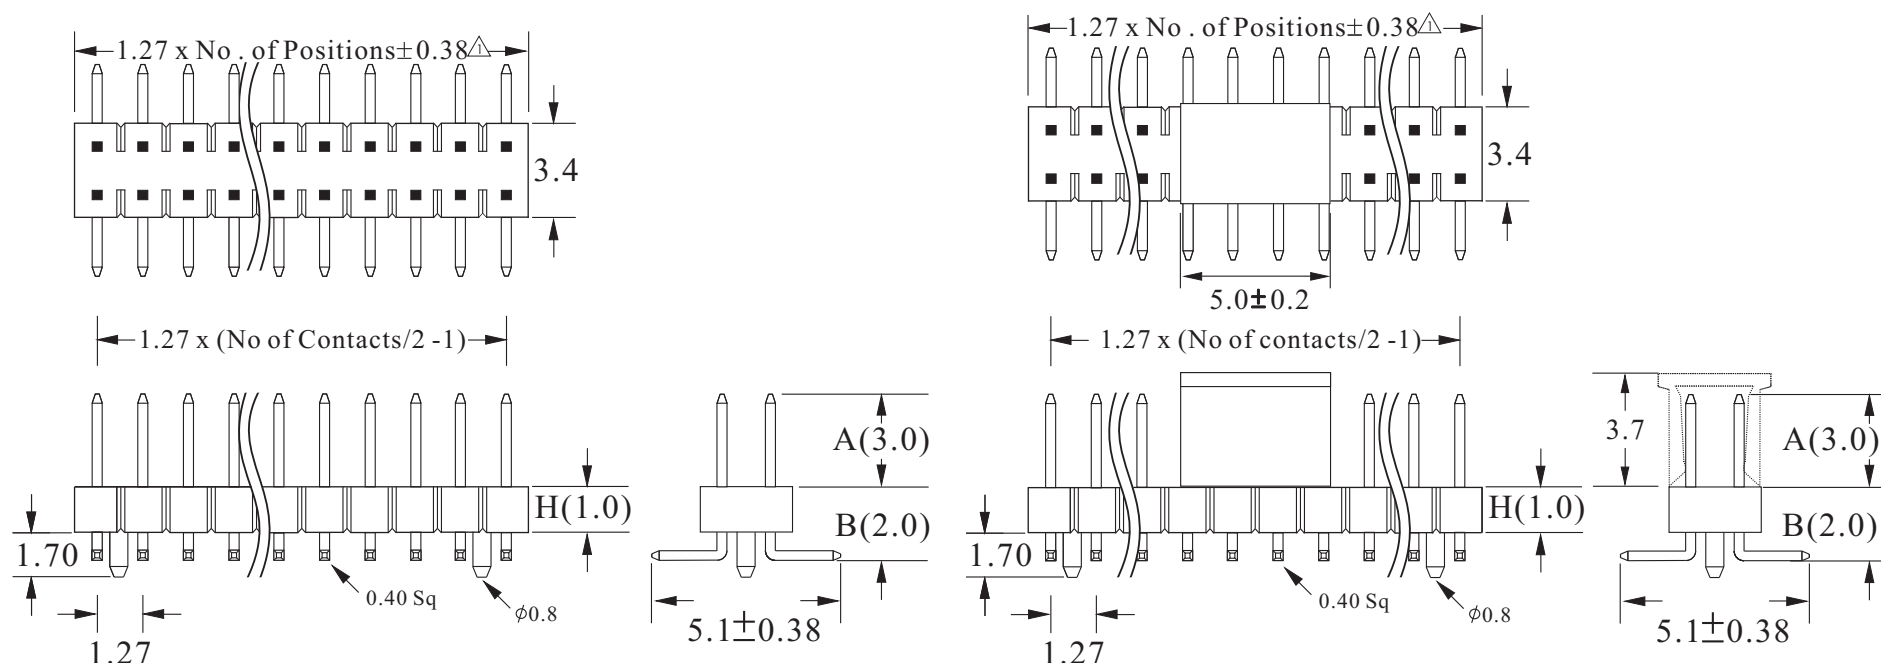


Recommended P.C.Board Hole Layout :

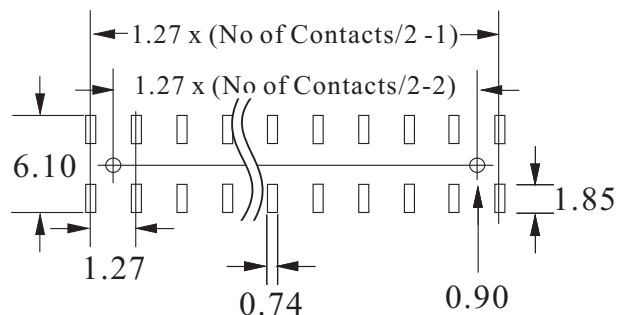

Recommended P.C.Board Hole Layout :

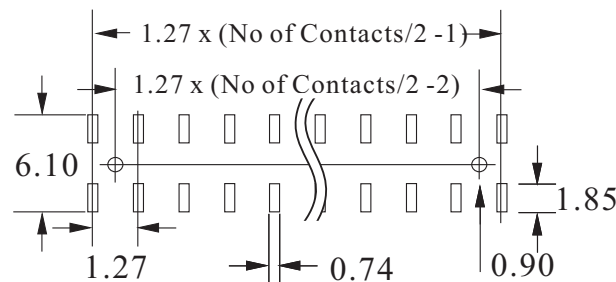

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW 2004/04/28 DATE H. D. LI	PART NO SHPD14-XXX-XX-A/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Pin Header SMD Type Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.