

**SPECIFICATIONS**

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

**MATERIAL :**

Housing : High Temperature Thermoplastic

Terminal : Brass

**ORDER INFORMATION:**

$$\text{SHPD14} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{XX}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A}}{\text{e}} / \frac{\text{B}}{\text{f}} - \frac{\text{XX}}{\text{g}} \frac{\text{X}}{\text{h}}$$

a. Pin of numbers:

02 ~ 100

b. Plastic Base :

A : 1.0mm

B : 1.5mm

C : 2.0mm

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Post selection :

0 : Without Post

1 : With Post 1.7mm

2 : With Post 1.4mm

3: Without Post CAP

4: With Post 1.4mm CAP

5: With Post 1.7mm CAP

e. Pin length :

if you desire on other length, by marking

put desired length the A / B.

(Standard:3.0/2.0)

f. Plastic Color :

W : white

B : black

g. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

h.Pack selection:


C : Contron Pack


T : Tube Pack

R : Reel Pack


**VERSION & EC DESCRIPTION**

DATE	VERSION	PAGE	DESCRIPTION
2005/04/29	A	22-23	Add SHPD14-XXX Plan
2006/01/16	B	22-23	增加公差值 △


GENERAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE	2005/04/29 H. D. LI	PART NO SHPD14-XXX-XX-A/B-XX-X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	TITLE Pitch:1.27x1.27mm Dual Row Pin Header SMD Type Series
UNIT :mm	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

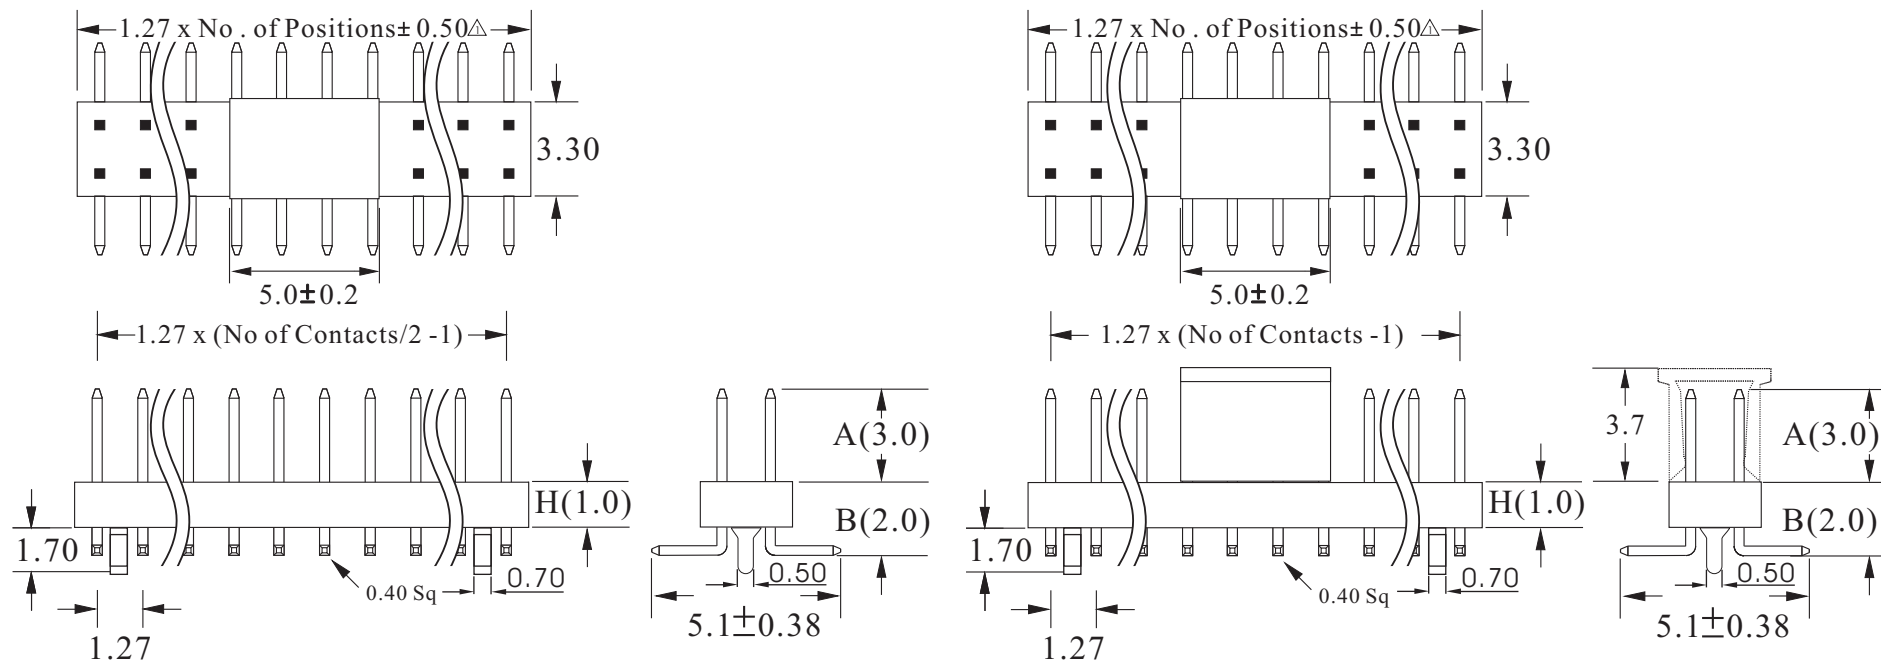


Recommended P.C.Board Hole Layout :

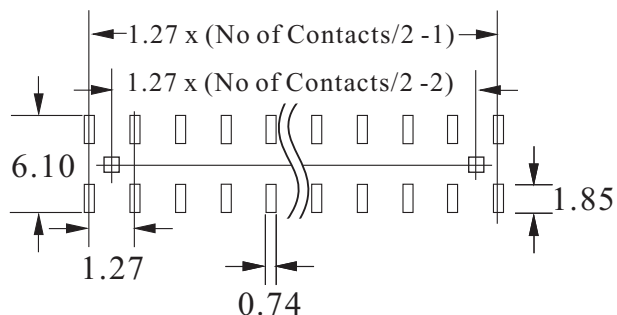

Recommended P.C.Board Hole Layout :

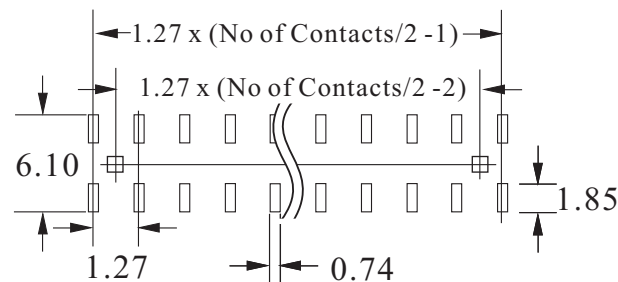

GENAL TOLERANCE	DRAW DATE	2004/04/28 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	SHPD14-XXX-XX-A/B-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Row Pin Header SMD Type Series
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.