

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40 °C ~ +105 °C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

ORDER INFORMATION:HPDR14 - $\frac{XX}{a} \frac{X}{b} - \frac{X0}{c} - \frac{A/B}{d} - \frac{XX}{e} \frac{X}{f} - \frac{X}{g}$

a. Pin of numbers:

02 ~ 100

b. Plastic Base

1 : H=1.0mm

3 : H=1.5mm (standard)

4 : H=2.6mm

5 : H=2.0mm

c. 0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin length:

if you desire on other length, by marking

put desired length the A / B.

(Standard:3.0/2.5)

e. Plastic Color :

W : White

B : Black

f. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)


g. Pack selection:




C : Contron Pack

T : Tube Pack


R : Reel Pack


VERSION & EC DESCRIPTION			
DATE	VERSION	PAGE	DESCRIPTION
2000/09/01	A	6-7	Add HPDR14-XXX Plan
2004/04/28	B	6-7	Add Material: LCP Revise Plan
2004/08/12	B	6	Add Material: N1
2004/12/24	B	6	Revise Material : N1 => N9
2005/03/09	B	6-7	Add Pack : Contron 、 Tube 、 Reel
2006/01/16	C	6-7	增加公差值△

GENERAL TOLERANCE .X ± 0.50 .XX ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE	2004/04/28 H. D. LI	PART NO	HPDR14-XXX-X0-A/B-XX-X
	DESIGN	H. D. LI	TITLE	Pitch:1.27x1.27mm Dual Row Pin Header 90° Series
	CHECKED	Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.	
UNIT :mm	APPROVED	J. F. KANG		

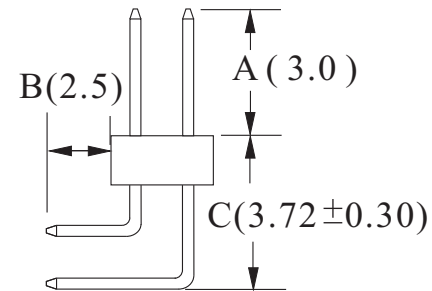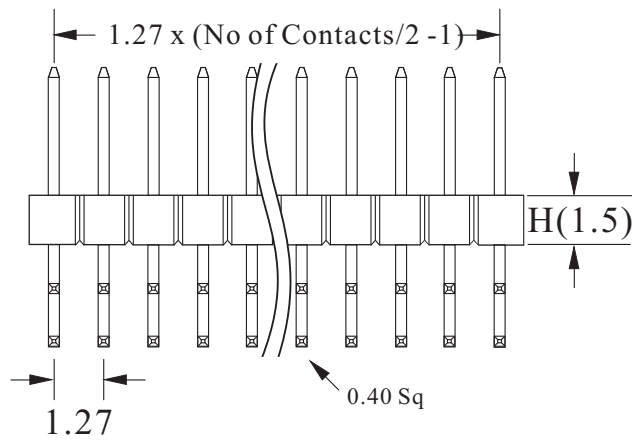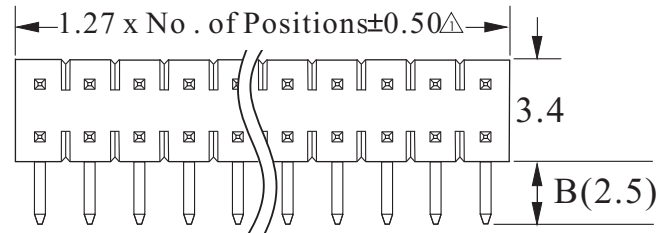

Recommended P.C.Board Hole Layout :

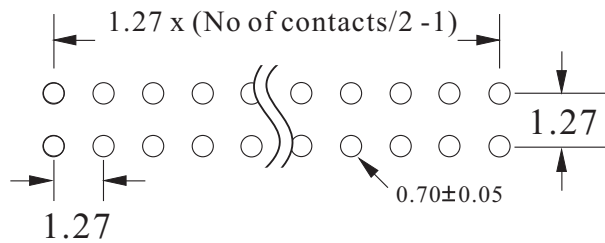

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW 2004/04/28 DATE H. D. LI	PART NO HPDR14-XXX-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE Pitch: 1.27x1.27mm Dual Row Pin Header 90° Series
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.