

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

ORDER INFORMATION:

$$\text{HPDR14} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{X0}}{\text{c}} - \frac{\text{A/B}}{\text{d}} - \frac{\text{X}}{\text{e}} \frac{\text{X}}{\text{f}} - \frac{\text{X}}{\text{g}}$$

a. Pin of numbers:

02 ~ 100

b. Plastic Base

A : 1.0mm

B : 1.5mm

C : 2.0mm

c. 0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin length:

if you desire on other length, by marking
put desired length the A / B.

(Standard:3.0/2.5)

e. Plastic Color :

W : White

B : Black

f. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

g. Pack selection:

C : Contron Pack

T : Tube Pack




R : Reel Pack

VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2005/05/05	A	24-25	Add HPDR14-XXX Plan
2006/01/16	B	24-25	增加公差值△


GENERAL TOLERANCE	DRAW DATE	2005/05/05	PART NO
X. ± 0.50	H. D. LI		HPDR14-XX(A-C)-X0-A/B-XX-X
.X ± 0.30	DESIGN	H. D. LI	TITLE
.XX ± 0.20	CHECKED	Y. M. LU	Pitch:1.27x1.27mm Dual Row Pin Header 90°Series
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			


 宏揚精密有限公司
 HOJAR PRECISION CO., LTD.

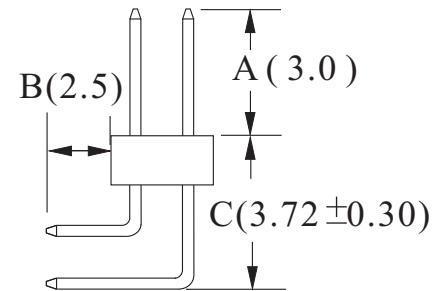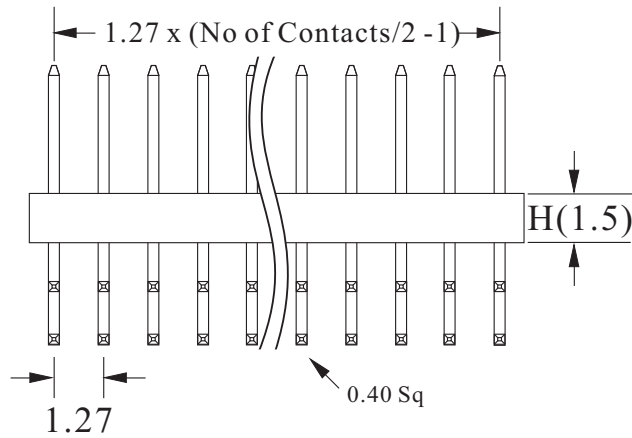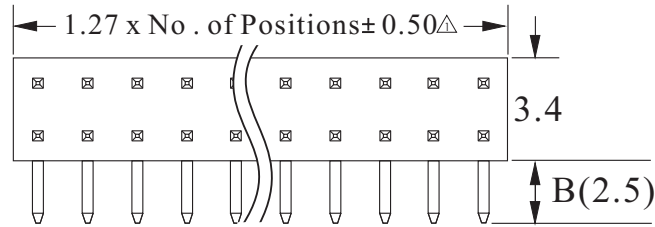

Recommended P.C.Board Hole Layout :

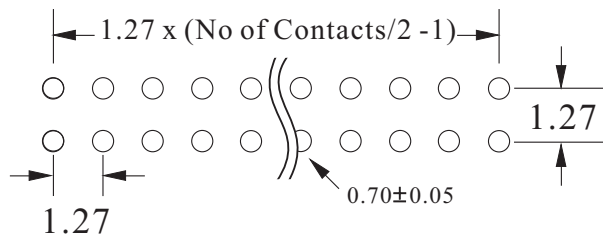

GENERAL TOLERANCE X. ± 0.50 .XX ± 0.30 .XXX ± 0.20 .XXX ± 0.15	DRAW DATE 2005/05/05 H. D. LI	PART NO HPDR14-XX(A-C)-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE Pitch: 1.27x1.27mm Dual Row Pin Header 90° Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.