

## SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : - 40°C ~ + 105°C

Retention force : 0.45kg

## MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass


## ORDER INFORMATION:




HPD24 -  $\frac{XX}{a} \frac{X}{b} - \frac{X0}{c} - \frac{A}{d} / \frac{C}{d} / \frac{B}{d} - \frac{XX}{e} - \frac{X}{f} \frac{X}{g}$

- a. Pin of numbers:  
02 ~ 100
- b. Plastic Base  
1 : 1.0mm  
3 : 1.5mm  
4 : 2.6mm  
5 : 2.0mm
- c. Plated Selection :  
0 : Tin Plated  
1 : Gold Flash  
2 : Gold 5u"  
3 : Gold 15u"  
4 : Gold 30u"
- d. Pin length:  
if you desire on other length, by marking  
put desired length the A/C/B
- e. Plastic Color :  
W : white  
B : black
- f. Plastic material  
L:LCP  
N:Nylon 6T  
N9: Nylon 9T(E)
- g. Pack selection:  
C : Contron Pack  
T : Tube Pack  
R : Reel Pack


### VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2000/09/01	A	8-9	Add HPD24-XXX Plan
2004/04/28	B	8-9	Add Material: LCP Revise Plan
2004/08/12	B	8	Add Material: N1
2004/12/24	B	8	Revise Material : N1 => N9
2005/03/09	B	8-9	Add Pack : Contron 、 Tube 、 Reel
2006/01/16	C	8-9	增加公差值 Δ

GENERAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE	2004/04/28 H. D. LI	PART NO
	DESIGN	H. D. LI	HPD24-XXX-X0-A/C/B-XX-X
	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header Series
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

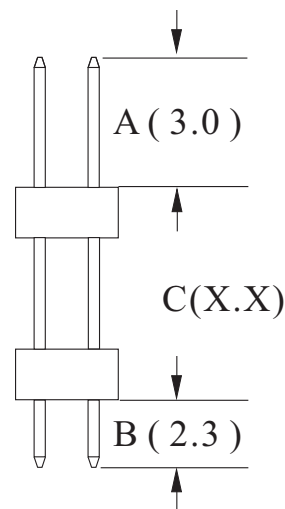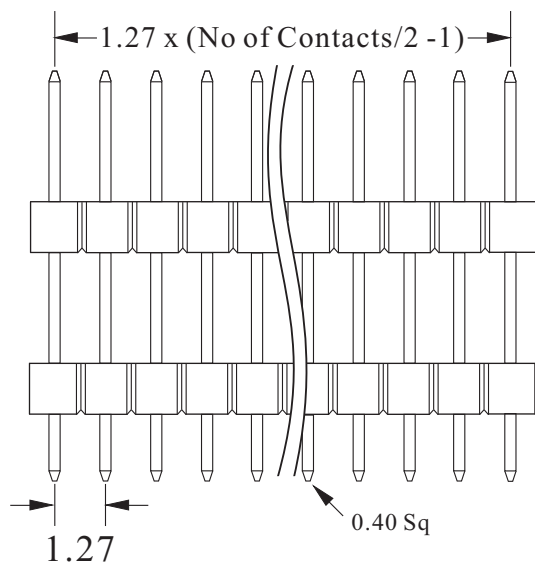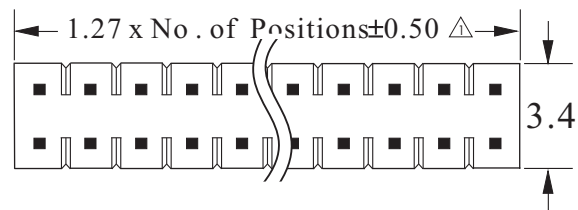

Recommended P.C.Board Hole Layout :

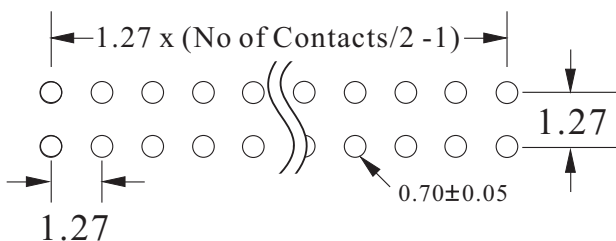

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE 2004/04/28 H. D. LI	PART NO HPD24-XXX-X0-A/C/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.