

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40 °C ~ +105 °C

Retenion force : 0.45kg

MATERIAL :

Housing : High Temperature Thermoplstic

Terminal : Brass


ORDER INFORMATION:




$$\text{HPD24} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{X0}}{\text{c}} - \frac{\text{A}}{\text{d}} / \frac{\text{C}}{\text{d}} / \frac{\text{B}}{\text{d}} - \frac{\text{XX}}{\text{e}} - \frac{\text{X}}{\text{f}} \frac{\text{X}}{\text{g}}$$

- a. Pin of numbers:
02 ~ 100
- b. Plastic Base
A : 1.0mm
B : 1.5mm
C : 2.0mm
- c. Plated Selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Pin length:
if you desire on other length, by marking
put desired length the A/C/B
- e. Plastic Color :
W : white
B : black
- f. Plastic material
L:LCP
N:Nylon 6T
N9: Nylon 9T(E)
- g. Pack selection:
C : Contron Pack
T : Tube Pack
R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2005/05/05	A	26-27	Add HPD24-XXX Plan
2006/01/16	B	26-27	增加公差值△

GENAL TOLERANCE	DRAW DATE	2005/05/05 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HPD24-XX(A-C)-X0-A/C/B-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header Series
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

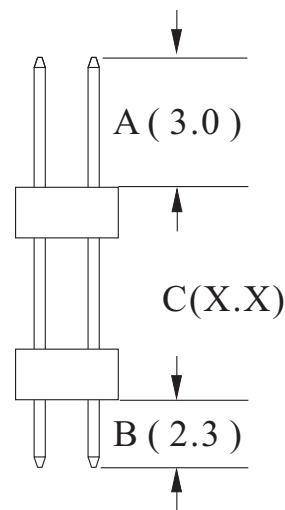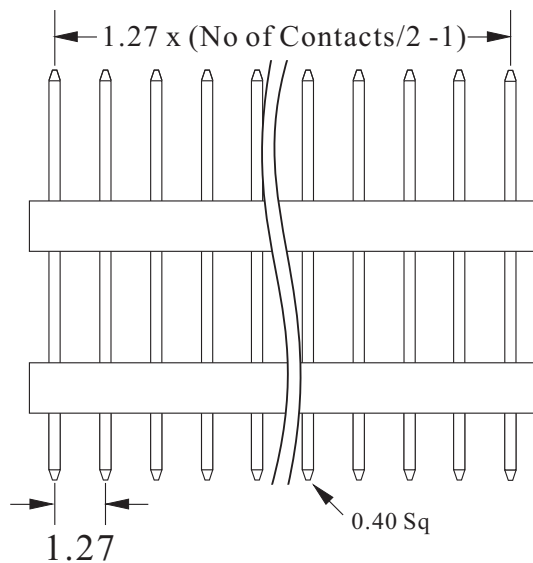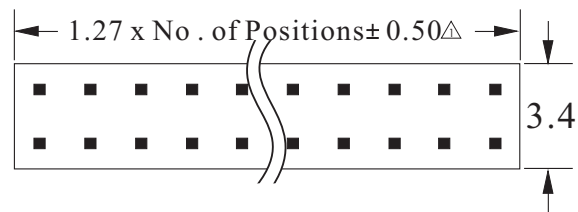

Recommended P.C.Board Hole Layout :

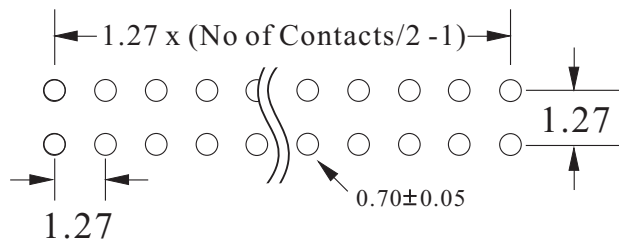

GENERAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE 2005/05/05 H. D. LI	PART NO HPD24-XX(A-C)-X0-A/C/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.