

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40 °C ~ +105 °C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

ORDER INFORMATION:

$$\text{HPDR24} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{X0}}{\text{c}} - \frac{\text{A/C}}{\text{d}} / \frac{\text{B}}{\text{e}} - \frac{\text{XX}}{\text{f}} - \frac{\text{X}}{\text{g}}$$

a. Pin of numbers:

04 ~ 100

b. Plastic Base

1 : H=1.0mm

3 : H=1.5mm(Standard)

4 : H=2.6mm

5 : H=2.0mm

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin length:

if you desire on other length, by marking
put desired length the A / C / B.

e. Plastic Color :

W:white

B:black

f. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

g.Pack selection:


C : Contron Pack



T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2000/09/01	A	10-11	Add HPDR24-XXX Plan
2004/04/28	B	10-11	Add Material: LCP Revise Plan
2004/08/12	B	10	Add Material: N1
2004/12/24	B	10	Revise Material : N1 => N9
2005/03/09	B	10-11	Add Pack : Contron 、 Tube 、 Reel
2006/01/16	C	10-11	增加公差值 Δ

GENERAL TOLERANCE	DRAW DATE	2004/04/28 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HPDR24-XXX-X0-A/C/B-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header 90°
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

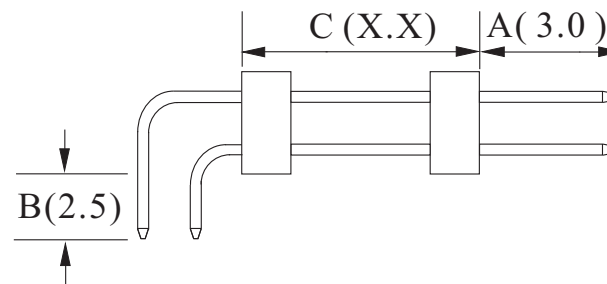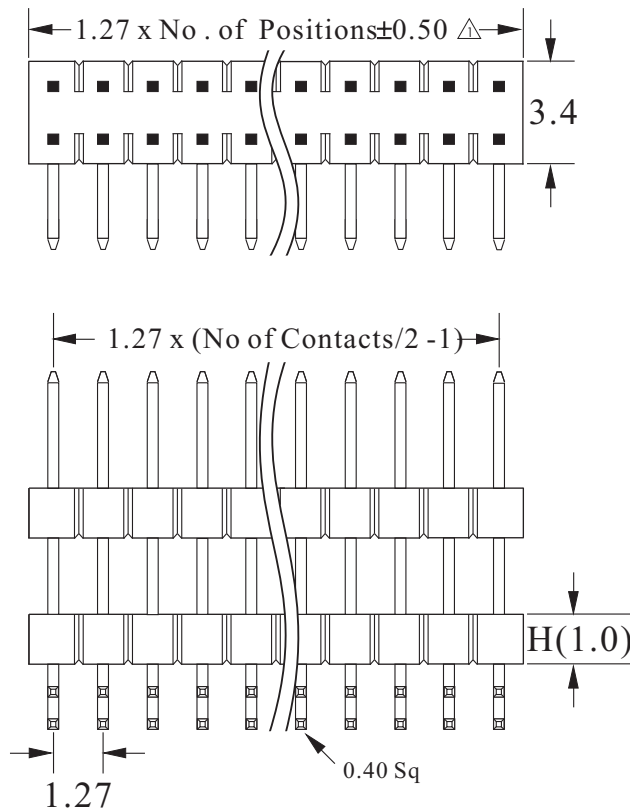

Recommended P.C.Board Hole Layout :

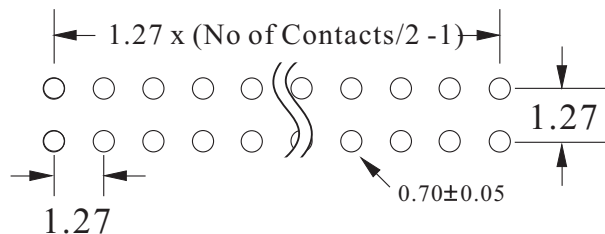

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW 2004/04/28 DATE H. D. LI	PART NO HPDR24-XXX-X0-A/C/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header 90°
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.