

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40℃ ~ +105℃

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

ORDER INFORMATION:

$$\text{HPDR24} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{X0}}{\text{c}} - \frac{\text{A/C}}{\text{d}} / \text{B} - \frac{\text{XX}}{\text{e}} - \frac{\text{X}}{\text{f}} \frac{\text{g}}{\text{g}}$$

a. Pin of numbers:

04 ~ 100

b. Plastic Base

A : 1.0mm

B : 1.5mm

C : 2.0mm

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin length:

if you desire on other length, by marking
put desired length the A / C / B.

e. Plastic Color :

W:white

B:black

f. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

g.Pack selection:


C : Contron Pack


T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2005/05/05	A	28-29	Add HPDR24-XXX Plan
2006/01/16	B	28-29	增加公差值△

GENAL TOLERANCE	DRAW DATE	2005/05/05	PART NO
X. ± 0.50	DATE	H. D. LI	HPDR24-XXX-X0-A/C/B-XX-X
.X ± 0.30	DESIGN	H. D. LI	TITLE
.XX ± 0.20	CHECKED	Y. M. LU	Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header 90°
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

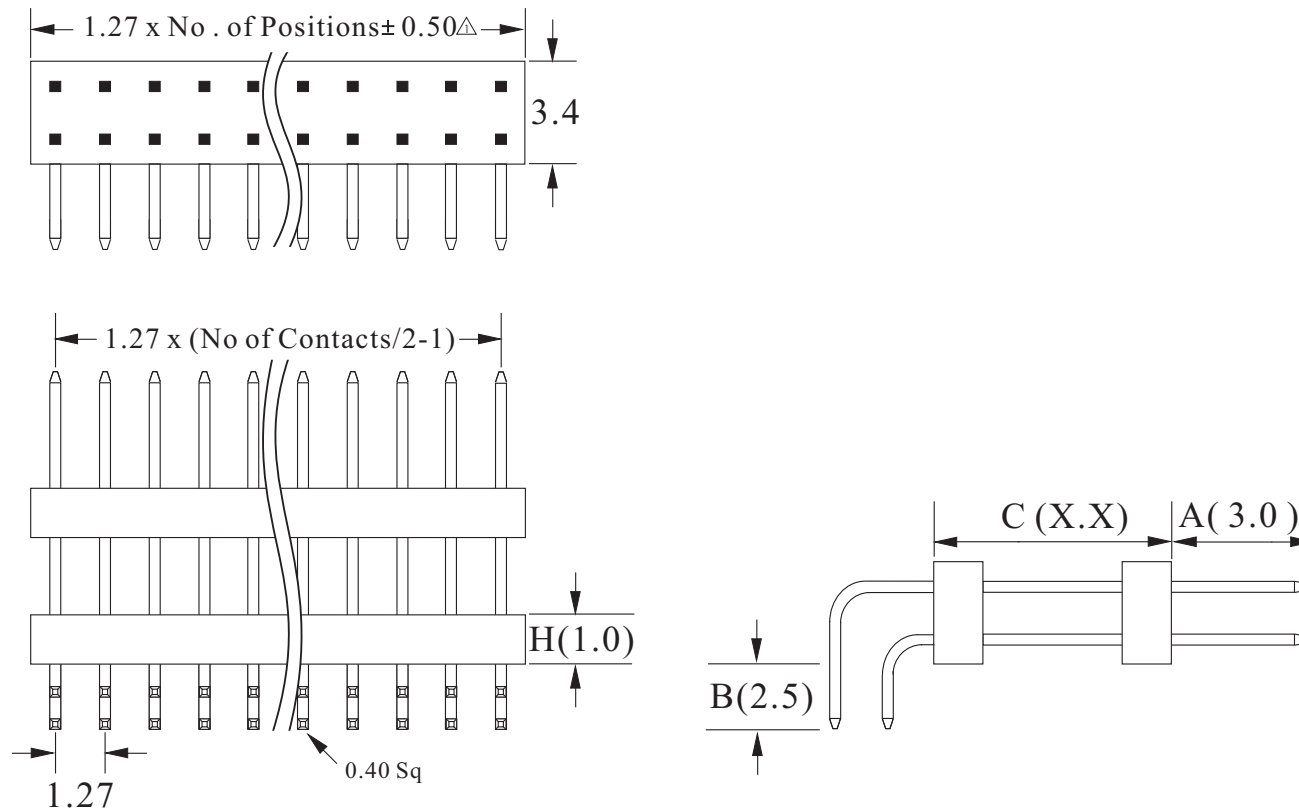

Recommended P.C.Board Hole Layout :

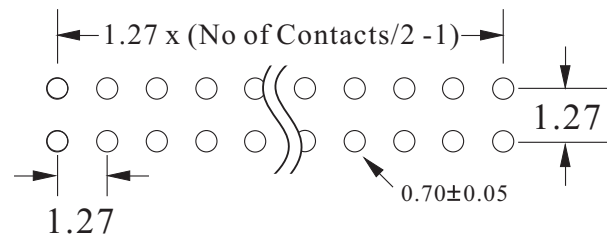

GENAL TOLERANCE	DRAW DATE	2004/04/28 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HPDR24-XXX-X0-A/C/B-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header 90°
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.