

## SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

## MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(C2680)

## ORDER INFORMATION:

SHPD24 -  $\frac{XX}{a} \frac{X}{b} - \frac{XX}{c} \frac{X}{d} - \frac{A}{e} / \frac{B}{f} - \frac{XX}{g} - \frac{X}{h}$

a. Pin of numbers:

02 ~ 100

b. Plastic Base

1 : 1.0mm

3 : 1.5mm

4 : 2.6mm

5 : 2.0mm

c. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. 0 : Without Post

1 : With Post 1.7mm

2 : With Post 1.4mm

3: Without Post CAP

4: With Post 1.4mm CAP

5: With Post 1.7mm CAP

e. Pin length:

if you desire on other length, by marking  
put desired length the A / B.

f. Plastic Color :

W:white

B:black

g. Plastic material

L:LCP

N:Nylon 6T

N9: Nylon 9T(E)

h.Pack selection:


C : Contron Pack


T : Tube Pack

R : Reel Pack


## VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2000/09/01	A	12-13	Add SHPD24-XXX Plan
2004/04/28	B	12-13	Add Material: LCP Revise Plan
2004/08/12	B	12	Add Material: N1
2004/12/24	B	12	Revise Material : N1 => N9
2005/03/09	B	12-13	Add Pack : Contron 、 Tube 、 Reel
2006/01/16	C	12-13	增加公差值 Δ

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW DATE	2004/04/28 H. D. LI	PART NO SHPD24-XXX-XX-A/B-XX-X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	TITLE Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header SMD Type Series
	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm			

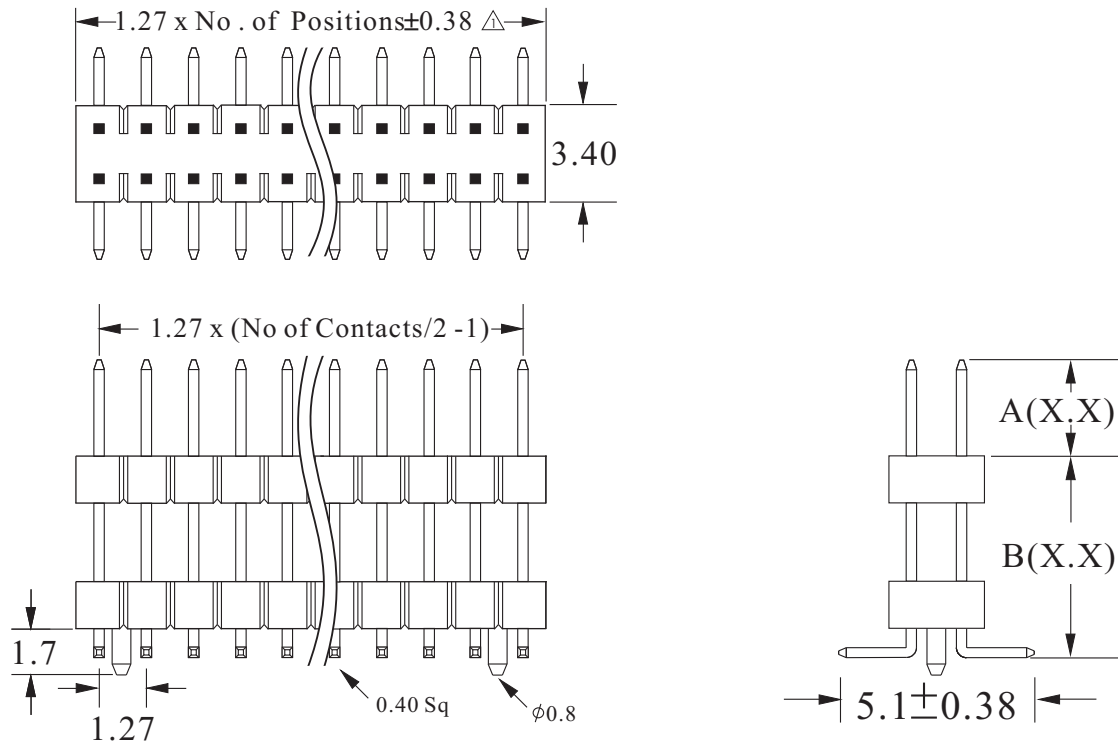

Recommended P.C.Board Hole Layout :

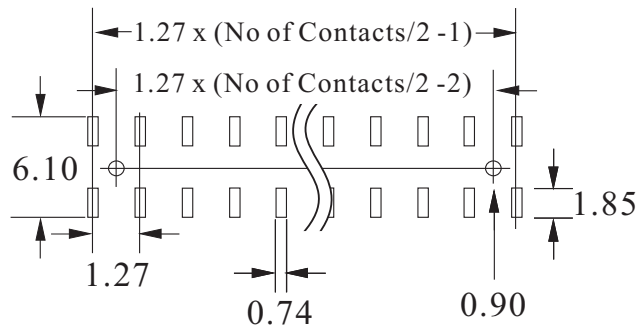

GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	DRAW 2004/04/28 DATE H. D. LI	PART NO SHPD24-XXX-XX-A/B-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Plastic Dual Row Pin Header SMD Type Series
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.