

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(C2680)

ORDER INFORMATION:SHPD15 - $\frac{XX}{a} \frac{X}{b} - \frac{X0}{c} - \frac{A}{d} \frac{B}{e} \frac{XX}{f} - \frac{X}{g}$

a. Pin of numbers:

06 ~ 98

b. Plastic Base

1 : H=2.54mm (Standard)

2 : H=1.4mm

3 : H=1.7mm

c. 0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin Length :

if you desire on other length, by marking
put desired length the A / B.

(standard:2.8/3.81)

e. Plastic color :

B : Black

f. Plastic material

N:Nylon 6T

g.Pack selection:

C : Contron Pack


T : Tube Pack



R : Reel Pack

B : Bag Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/04/28	A	16-17	Add SHPD15-XXX Plan
2005/03/09	A	16-17	Add Pack : Contron 、 Tube 、 Reel

GENERAL TOLERANCE	DRAW DATE	2004/04/28	PART NO
X. ± 0.50	DATE	H. D. LI	SHPD15-XXX-X0-A/B-XX-X
.X ± 0.30	DESIGN	H. D. LI	TITLE
.XX ± 0.20	CHECKED	Y. M. LU	1.27x2.54 2xXX 排針 SMD 黑 NYLON
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

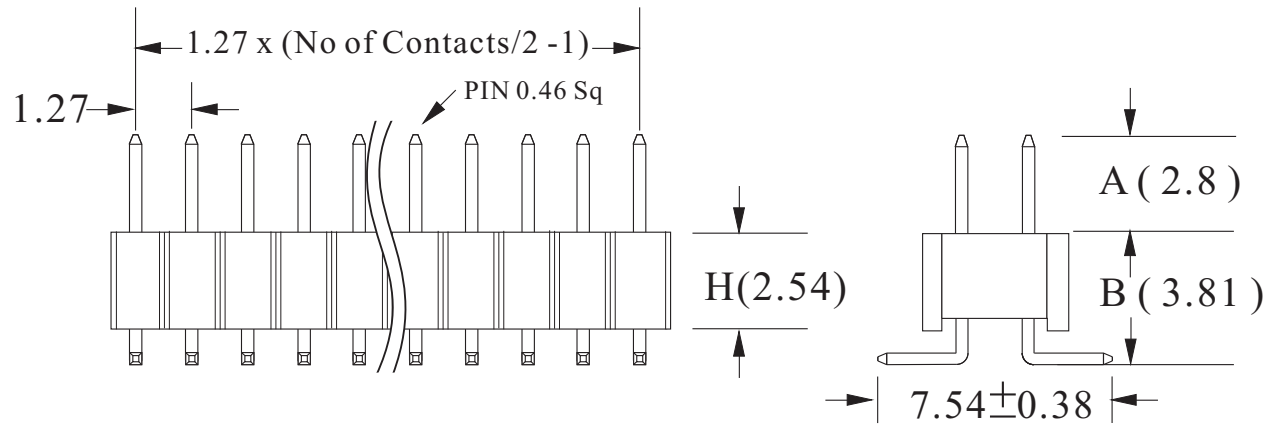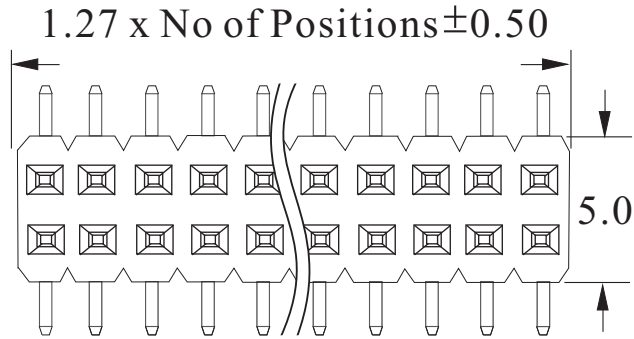

Recommended P.C.Board Hole Layout :

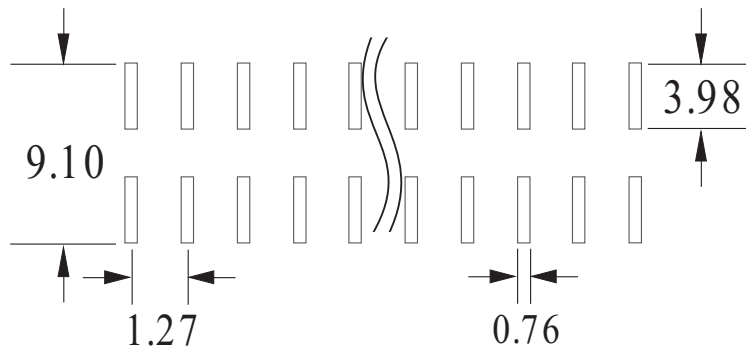

GENAL TOLERANCE X. ± 0.50 .XX ± 0.30 .XXX ± 0.20 .XXX ± 0.15	DRAW 2004/04/28 DATE H. D. LI	PART NO SHPD15-XXX-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE 1.27x2.54 2xXX 排針 SMD 黑 NYLON
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.