

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40 °C ~ +105 °C

Contact Resistance:20 Milliohms max

MATERIAL :

Housing : Thermoplastic UL94V-0

Contact: Copper alloys

Terminal : Brass 65/35(C2680)

ORDER INFORMATION:HPD25 - $\frac{XX}{a} \frac{X}{b} - \frac{X0}{c} - \frac{A/C/B}{d} - \frac{XX}{e} - \frac{X}{g}$

a. Pin of numbers:

04 ~ 100

b. Plastic Base

1 : H=2.54mm (Standard)

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Pin Length :

if you desire on other length, by marking
put desired length the A / C / B.

(standard:2.8/ C / 2.6)

e. Plastic color :

B : Black

f. Plastic material

N:Nylon 6T

g. Pack selection:

C : Contron Pack


T : Tube Pack




R : Reel Pack

B : Bag Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/04/28	A	18-19	Add HPD25-XXX Plan
2005/03/09	A	18-19	Add Pack : Contron · Tube · Reel

GENERAL TOLERANCE	DRAW DATE	2004/04/28	PART NO
X. ± 0.50	H. D. LI		HPD25-XXX-X0-A/C/B-XX-X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	1.27x2.54 2xXX 雙層排針 A/C/B DIP 黑 NYLON
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

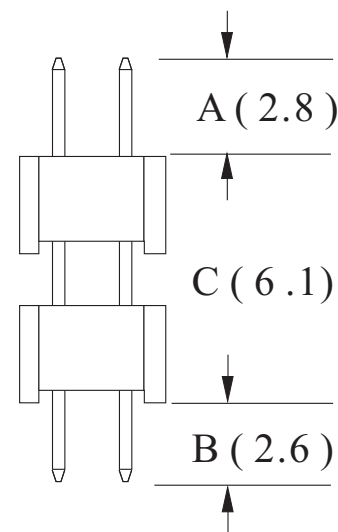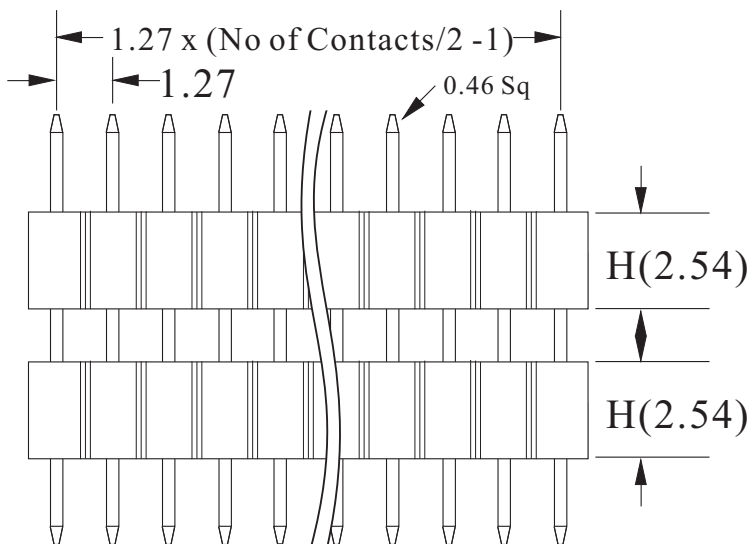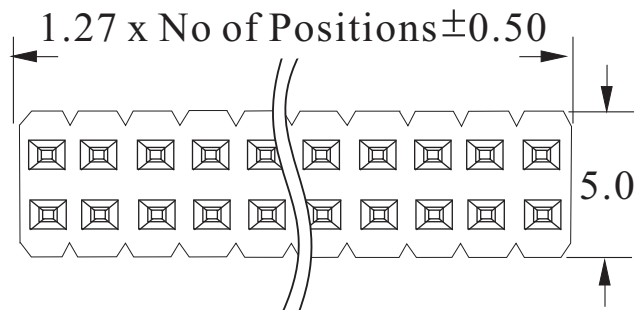

Recommended P.C.Board Hole Layout :

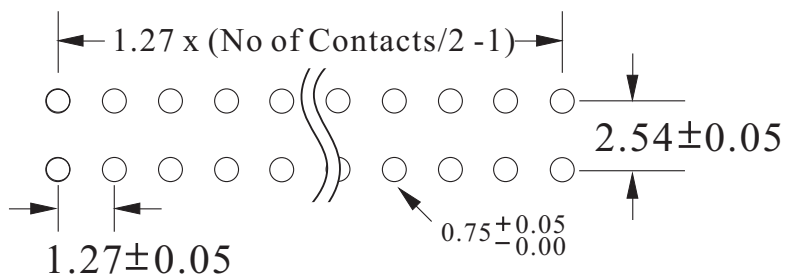

GENAL TOLERANCE	DRAW DATE	2004/04/28	PART NO
X. ± 0.50	DATE	H. D. LI	HPD25-XXX-X0-A/C/B-XX-X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	1.27x2.54 2xXX 雙層排針 A/C/B DIP 黑 NYLON
.XXX ± 0.15	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm			