

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS


SPECIFICATION




CURRENT: 1A
 OPERATING TEMPERATURE: -40°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : AC 500V RMS

ORDER INFORMATION:


SHPD25 - $\frac{XX}{a} \frac{X}{b} - \frac{X0}{c} - \frac{A}{d} / \frac{B}{e} - \frac{XX}{f} - \frac{X}{g}$


- a. Pin of numbers:
04 ~ 100
- b. Plastic Base
1 : H=2.50mm
- c. 0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Pin Length :
if you desire on other length, by marking
put desired length the A / B.
(standard:A(X.X)/B(X.X))
- e. Plastic color :
B : Black
- f. Plastic material
N:Nylon 6T
- g.Pack selection:
C : Contron Pack
T : Tube Pack
R : Reel Pack
B : Bag Pack

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DATE H. D. LI	PART NO SHPD25-XXX-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE 1.27x2.54 2xXX 排針 SMD 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

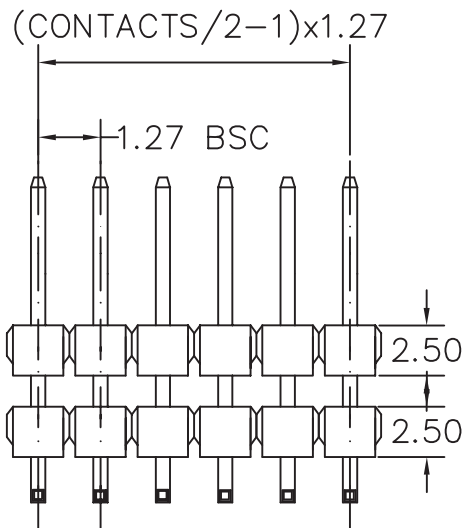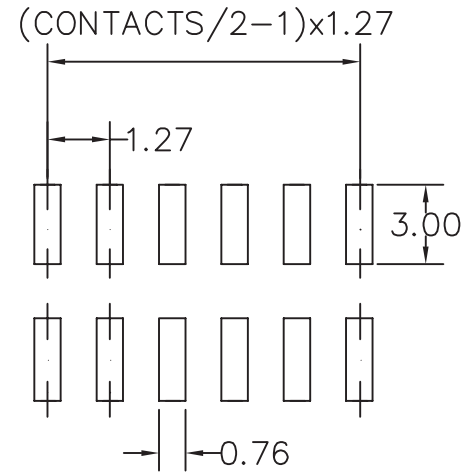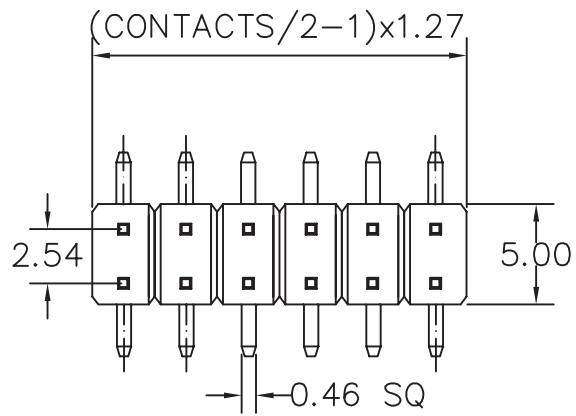

RECOMMENDED P.C.B LAYOUT

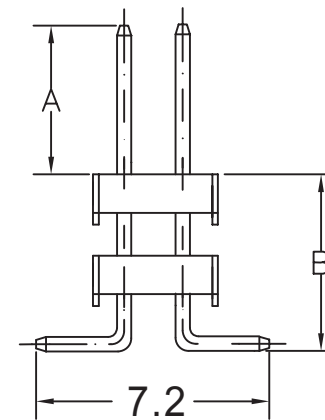

GENERAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2004/04/28 H. D. LI	PART NO SHPD25-XXX-X0-A/B-XX-X
	DESIGN H. D. LI	TITLE 1.27x2.54 2xXX 排針 SMD 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.