

## SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

## MATERIAL :

Housing :

Standard :P.B.T

Terminal :


## ORDER INFORMATION:




$$\text{HPD12} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A}}{\text{e}} / \frac{\text{B}}{\text{f}} - \frac{\text{X}}{\text{g}} \frac{\text{X}}{\text{h}}$$

- a. Pin of numbers:  
02 ~ 100
- b. Plastic Base :  
1 : H=2.0mm(standard)  
2 : H=1.5mm
- c. Plated selection :  
0 : Tin Plated  
1 : Gold Flash  
2 : Gold 5u"  
3 : Gold 15u"  
4 : Gold 30u"
- d. Post selection :  
0 : Without Post
- e. Pin length :  
if you desire on other length, by marking  
put desired length the A / B.  
(Standard:4.0/2.8)
- f. Plastic Color :  
B : black
- g. Plastic material  
P : P.B.T (off )  
E : P.B.T ( )  
N : Nylon 6T  
\*H=2.00mm 材質為P.B.T
- h. Pack selection:  
C : Conton Pack  
T : Tube Pack  
R : Reel Pack


## VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	2-3	Add HPD12 Series Plan
2005/03/09	A	2-3	Add Pack : Conton 、 Tube 、 Reel

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE	2004/03/26 H. D. LI	PART NO HPD12 - XX1 - XX - A / B-XX-X
	DESIGN	H. D. LI	TITLE 2.0 2xXX 插針 DIP 黑 P.B.T
	CHECKED	Y. M. LU	
	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

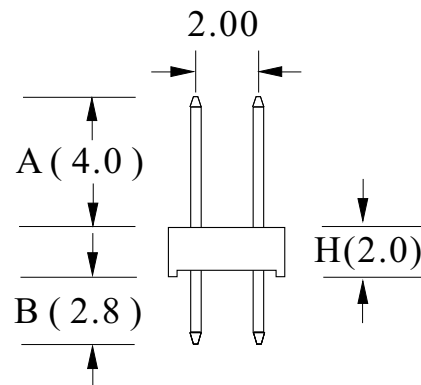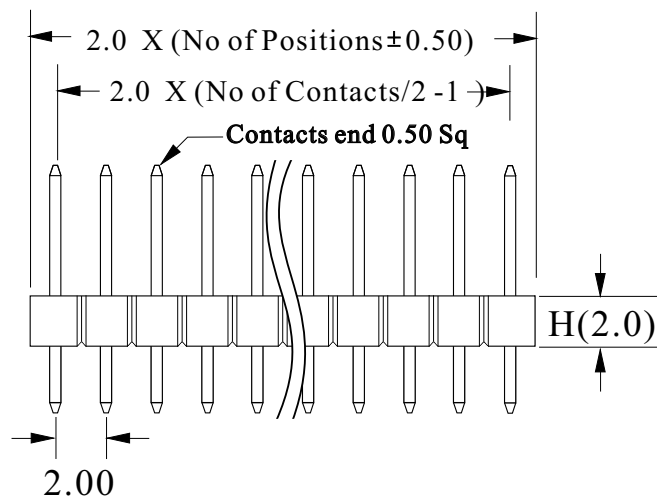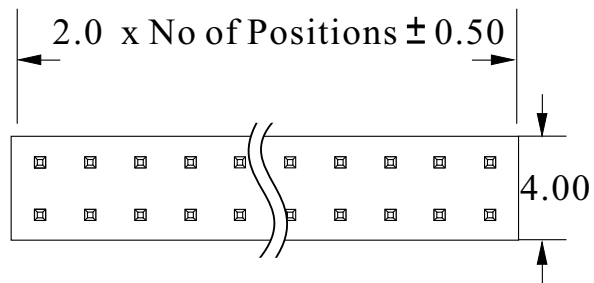

Recommended P.C.Board Hole Layout :

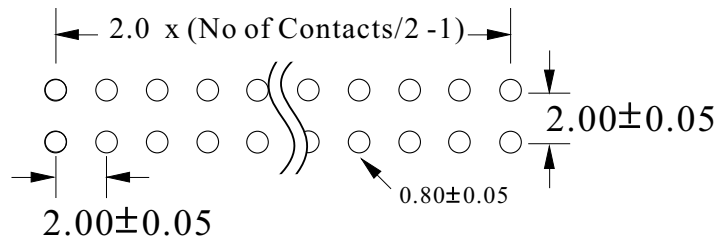

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2004/03/26 DATE H. D. LI	PART NO HPD12 - XX1 - XX - A / B-XX-X
	DESIGN H. D. LI	TITLE 2.0 2xXX 插針 DIP 黑 P.B.T
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.