

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Housing : Nylon 6T.

Terminal : Brass 65/35


ORDER INFORMATION:


$$\text{SHPD12} - \frac{\text{XX}}{\text{a}} \frac{\text{X}}{\text{b}} - \frac{\text{XX}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A/B}}{\text{e}} \frac{\text{XX}}{\text{f}} \frac{\text{X}}{\text{g}} - \frac{\text{X}}{\text{h}}$$

- a. Pin of numbers:
06 ~ 80
- b. Plastic Base :
1 : H=2.0mm(standard)
2 : H=1.5mm
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Post selection :
0 : Without Post
1 : With Post
2 : Without Post + CAP
3 : With Post + CAP
- e. Pin length :
if you desire on other length, by marking
put desired length the A / B.
(Standard : A / B)
- f. Plastic Color :
B : black
- g. Plastic material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon 6T (Standard)
*H=2.00mm P.B.T
- h. Pack selection:
B : Bag Pack
R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	6-7	Add SHPD12 Series Plan
2004/06/14	B	7	Add CAP Plan
2005/03/09	B	6-7	Add Pack : Bag 、 Reel

GENERAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE	2004/03/26 H. D. LI	PART NO SHPD12-XXX-XX-A/B-XX-X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	TITLE 2.0 2xXX 排針 SMD 黑 NYLON
	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.
UNIT :mm			

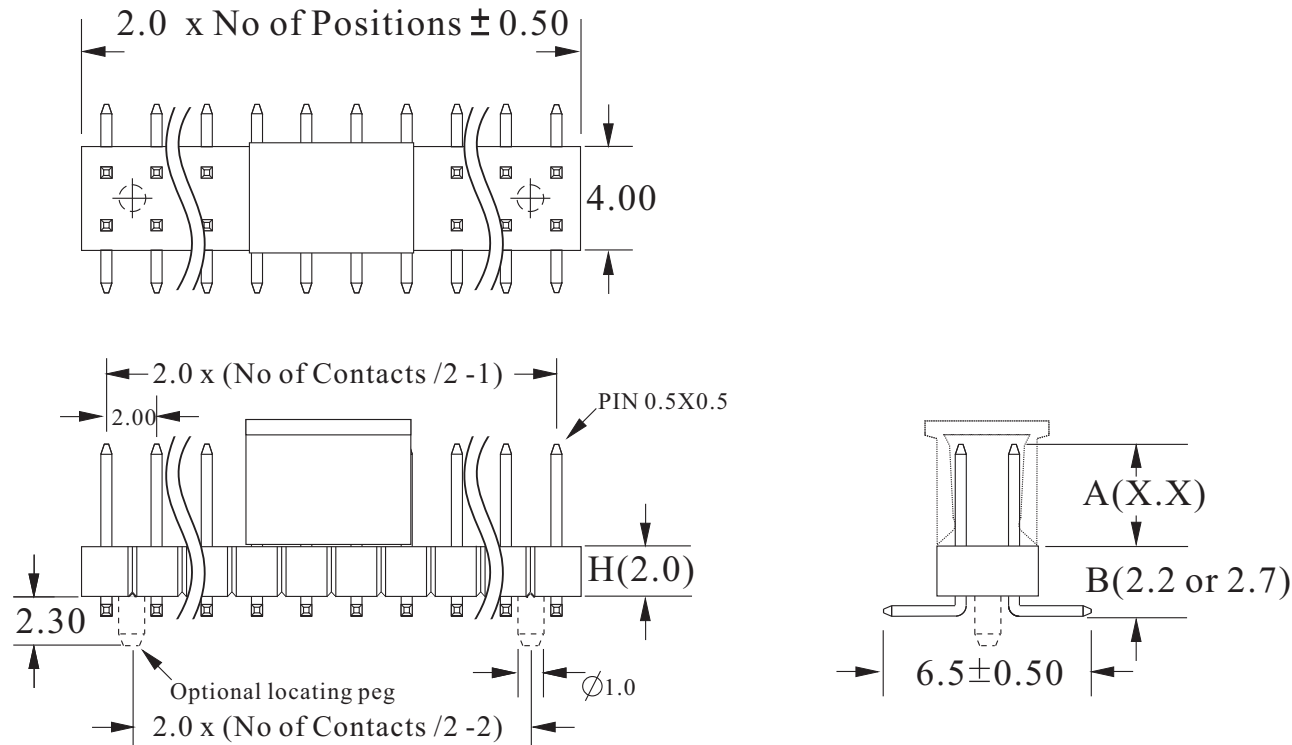

Recommended P.C.Board Hole Layout :

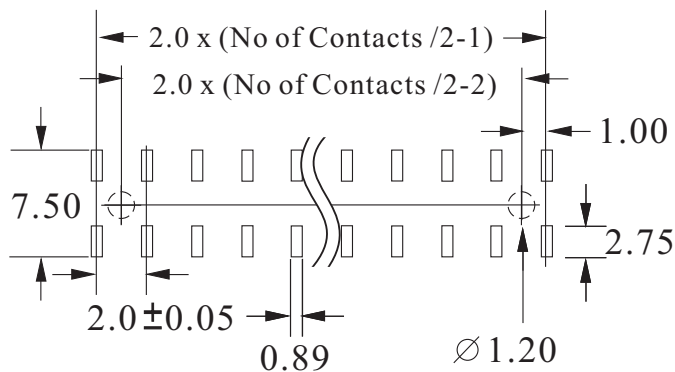

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2004/03/26 H. D. LI	PART NO SHPD12-XXX-XX-A/B-XX-X
	DESIGN H. D. LI	TITLE 2.0 2xXX 排針 SMD 黑 NYLON
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.