

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Housing : Nylon 6T.

Terminal : Brass 65/35


ORDER INFORMATION:


SHPD22 - $\frac{XX}{a} \frac{1}{b} - \frac{XX}{c} \frac{X}{d} - \frac{A}{e} \frac{B}{f} \frac{XX}{g} - \frac{X}{h}$

- a. Pin of numbers:
06 ~ 80
- b. Plastic Base
1 : H=2.0mm(standard)
2 : H=1.5mm
- c. Plated selection:
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. 0 : Without Post
1 : With Post
2 : Without Post + Cap
3 : With Post + Cap
- e. Pin length:
if you desire on other length, by marking
put desired length the A / B (Standard : A / B).
- f. Plastic Color :
B:black
- g. Plastic material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon 6T (Standard)
*H=2.00mm P.B.T
- h. Pack selection:
C : Contron Pack
T : Tube Pack
R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	10-11	Add SHPD22 Series Plan
2005/03/09	A	10-11	Add Pack : Contron 、 Tube 、 Reel

GENERAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE	2004/03/26 H. D. LI	PART NO	SHPD22-XX1-XX-A/B-XX-X
	DESIGN	H. D. LI	TITLE	2.0 2xXX 雙層排針 A/B SMD 黑 NYLON
	CHECKED	Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.	
UNIT :mm	APPROVED	J. F. KANG		

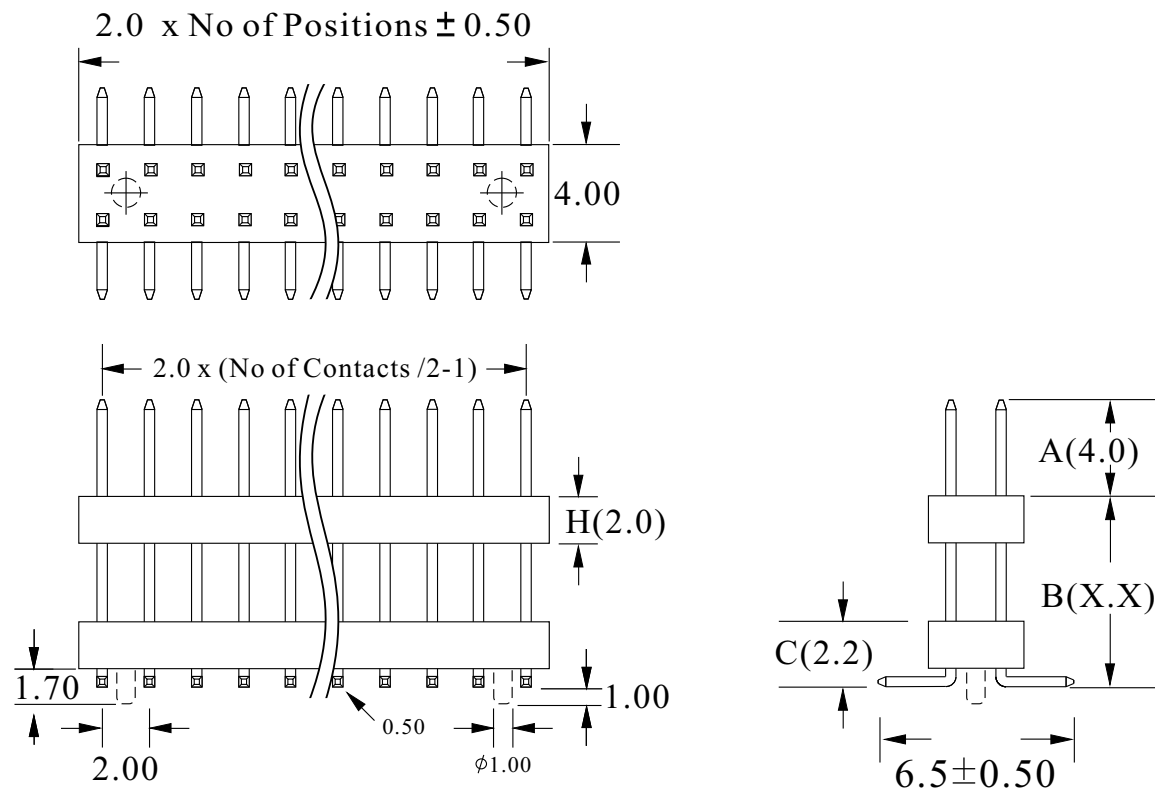

Recommended P.C.Board Hole Layout :

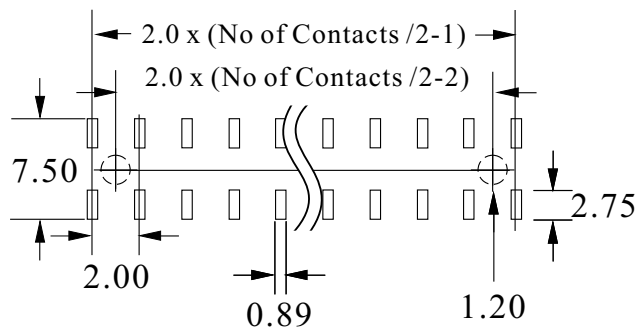

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2004/03/26 DATE H. D. LI	PART NO SHPD22-XX1-XX-A/B-XX-X
	DESIGN H. D. LI	TITLE 2.0 2xXX 雙層排針 A/B SMD 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.