

SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Insulator : Polyester,UL94V-0

Standard :P.B.T

Contact : Brass


ORDER INFORMATION:




$$\text{HPD11} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A}}{\text{e}} / \frac{\text{B}}{\text{f}} - \frac{\text{X}}{\text{g}} \frac{\text{X}}{\text{h}}$$

- a. Pin of numbers:
02 ~ 80
- b. Plastic Base :
1 : H=2.54mm(standard)
2 : H=1.5mm
3 : H=1.7mm
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
5 : Gold 10u"
- d. Post selection :
0 : Without Post
- e. Pin length :
if you desire on other length, by marking
put desired length the A / B.
(Standard:6.0/3.0)
- f. Plastic Color :
B : black
- g. Plastic material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon 6T
*H=2.54mm P.B.T
- h. Pack selection:
B : Bag Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	2-3	Add HPD11 Series Plan
2005/03/15	A	2-3	Add Pack : Bag

GENERAL TOLERANCE	DRAW DATE	2004/03/26	PART NO
X. ± 0.50	H. D. LI		HPD11 - XX1 - XX - A / B-XX-X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	2.54 2xXX 插针 DIP 黑 P.B.T
.XXX ± 0.15	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.
UNIT :mm			

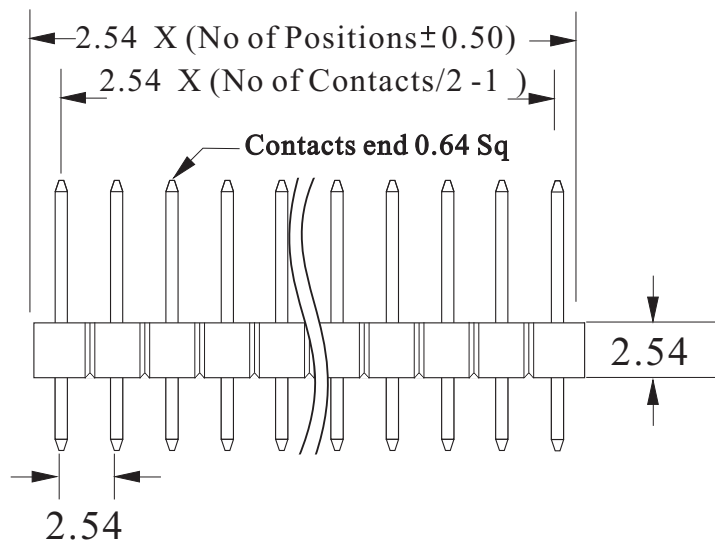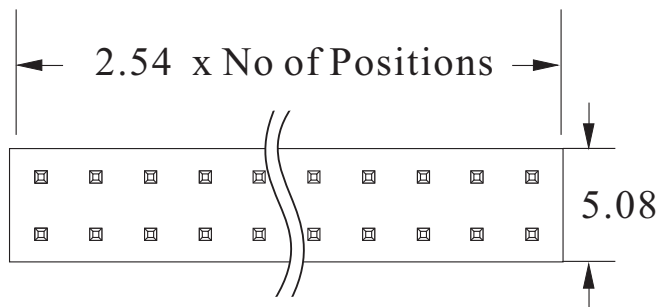

Recommended P.C.Board Hole Layout :

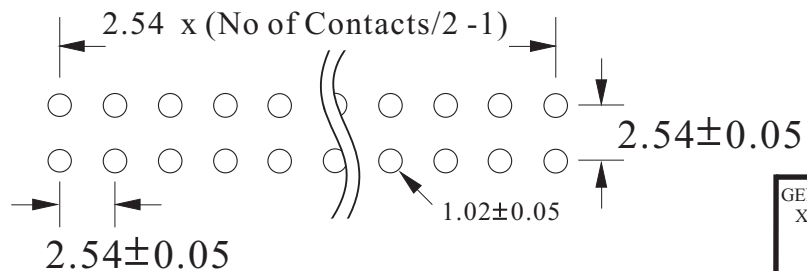

GENERAL TOLERANCE X. \pm 0.50 .X \pm 0.38 .XX \pm 0.25 .XXX \pm 0.15	DRAW DATE 2004/03/26 H. D. LI	PART NO HPD11 - XX1 - XX - A / B-XX-X
	DESIGN H. D. LI	TITLE 2.54 2xXX 排針 DIP 黑 P.B.T
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.