

## SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

## MATERIAL :

Housing : Nylon 6T.

Terminal : Brass 65/35

## ORDER INFORMATION:

$$\text{SHPD11} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{XX}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A}}{\text{e}} / \frac{\text{B}}{\text{f}} - \frac{\text{XX}}{\text{g}} - \frac{\text{X}}{\text{h}}$$

a. Pin of numbers:

06 ~ 64

b. Plastic Base :

1 : H=2.54mm(standard)

2 : H=1.5mm

3 : H=1.7mm

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Post selection :

0 : Without Post

1 : With Post

2 : Without Post + CAP

3 : With Post + CAP

e. Pin length :

if you desire on other length, by marking  
put desired length the A / B.

(Standard:6.0/3.3)

f. Plastic Color :

B : black

g. Plastic material

P : P.B.T (off料)

E : P.B.T (新料)

N : Nylon 6T (Standard)

\*H=2.54mm P.B.T

h. Pack selection:


C : Contron Pack


T : Tube Pack

R : Reel Pack


## VERSION &amp; EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	6-7	Add SHPD11 Series Plan
2004/10/19	A	7	Revise B(3.18) => B(3.3) Revise SMD7.9±0.5 => 7.5±0.5
2005/03/09	A	6-7	Add Pack : Contron · Tube · Reel

GENERAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	SHPD11-XX1-XX-A/B-XX-X
.X ± 0.38	CHECKED	Y. M. LU	TITLE
.XX ± 0.25	APPROVED	J. F. KANG	2.54 2xXX 排針 SMD黑 NYLON
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

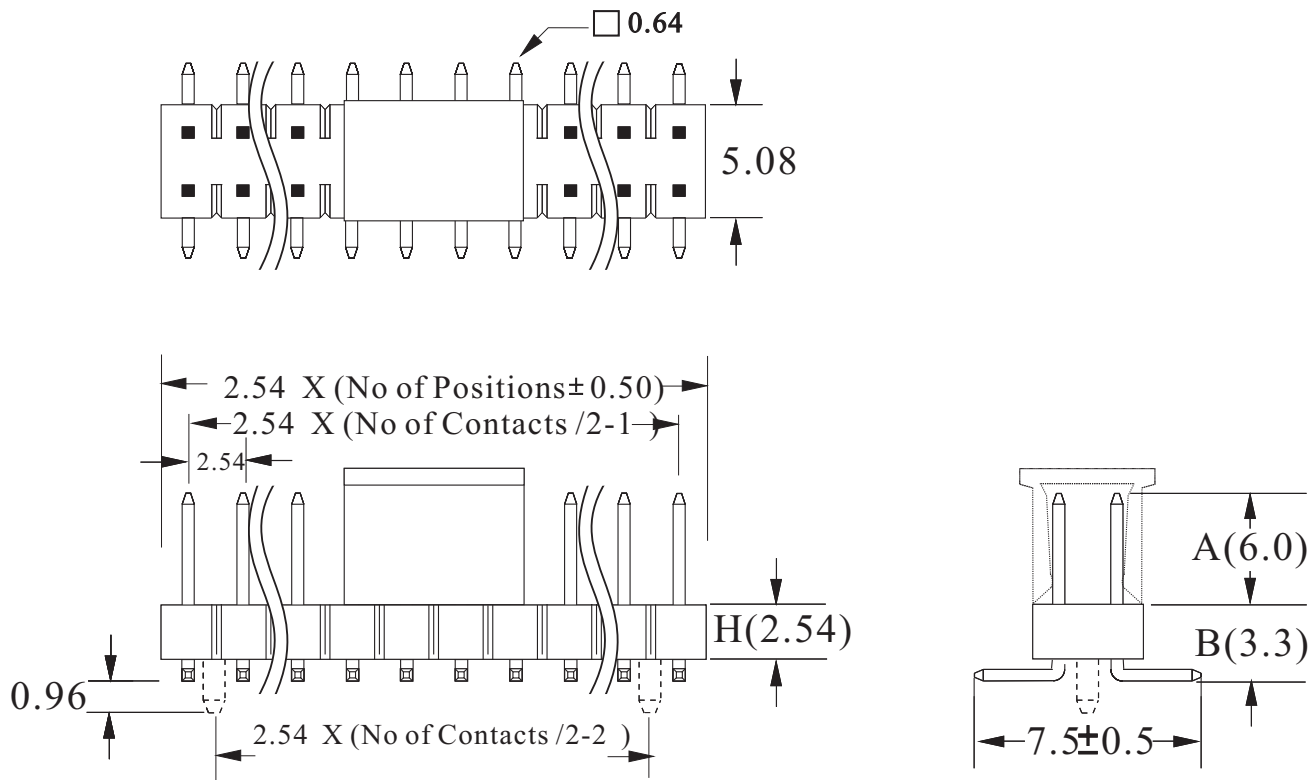

Recommended P.C.Board Hole Layout :

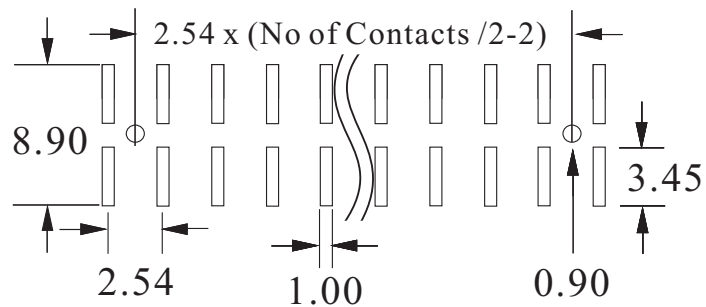

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2004/03/26 DATE H. D. LI	PART NO SHPD11-XX1-XX-A/B-XX-X
	DESIGN H. D. LI	TITLE 2.54 2xXX 排針 SMD黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.