

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105° C

MATERIAL :

Housing : P.B.T

Standard :

Terminal : Brass 65/35

ORDER INFORMATION:

$$\text{HPD11A} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{B}}{\text{e}} / \frac{\text{C}}{\text{f}} - \frac{\text{X}}{\text{g}} \frac{\text{X}}{\text{h}}$$

a. Pin of numbers:

02 ~ 100

b. Plastic Base :

1 : H=2.54mm(standard)

2 : H=1.5mm

3 : H=1.7mm

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Post selection :

0 : Without Post

1 : With Post

e. Pin length :

if you desire on other length, by marking
put desired length the B / C.

(Standard:3.0/2.5)

f. Plastic Color :

B : black

g. Plastic material

P : P.B.T (off料)

E : P.B.T (新料)

N : Nylon 6T

*H=2.54mm P.B.T

h. Pack selection:


C : Contron Pack




T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	8-9	Add HPD11A Series Plan
2005/03/09	A	8-9	Add Pack : Contron 、 Tube 、 Reel

GENERAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HPD11A - Xx1 - XX - B / C-XX-X
.X ± 0.38	CHECKED	Y. M. LU	TITLE
.XX ± 0.25	APPROVED	J. F. KANG	2.54 夾板式 2xXX 180度黑 NYLON
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

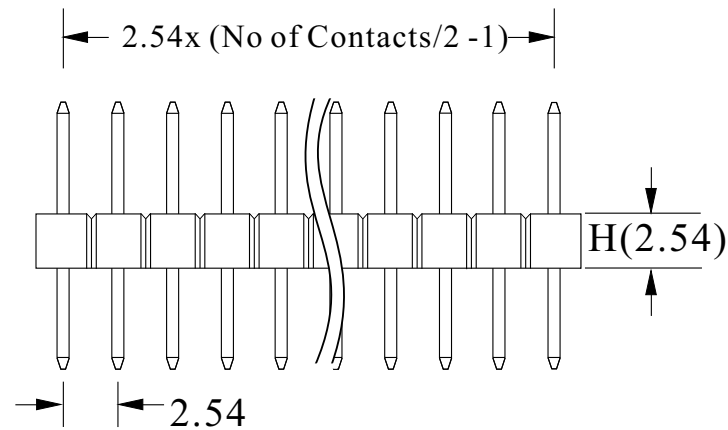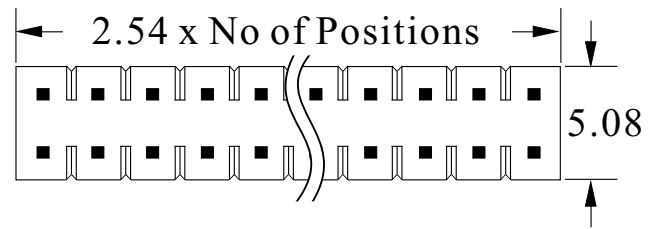

Recommended P.C.Board Hole Layout :

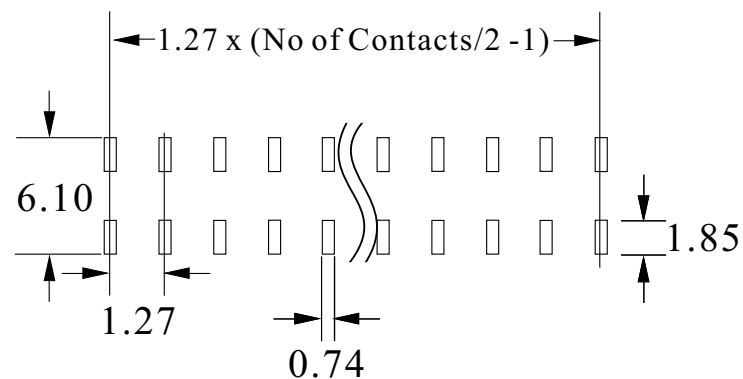

GENERAL TOLERANCE X. ± 0.50 .XX ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2004/03/26 H. D. LI	PART NO HPD11A - Xx1 - XX - B / C-XX-X
	DESIGN H. D. LI	TITLE 2.54 夾板式 2xXX 180度黑 NYLON
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.