

SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Insulator : Polyester,UL94V-0

Standard :P.B.T

Contact : Brass


ORDER INFORMATION:


$$\text{HPD21} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{A}}{\text{e}} / \frac{\text{C}}{\text{B}} - \frac{\text{XX}}{\text{f}} - \frac{\text{X}}{\text{g}} - \frac{\text{X}}{\text{h}}$$

- a. Pin of numbers:
04 ~ 100
- b. Plastic Base :
1 : H=2.54mm(standard)
2 : H=1.5mm
3 : H=1.7mm
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Post selection :
0 : Without Post
- e. Pin length :
if you desire on other length, by marking
put desired length the A / C / B.
(Standard:6.0/10.4/3.0)
- f. Plastic Color :
B : black
- g. Plastic material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon 6T
*H=2.54mm P.B.T
- h. Pack selection:
C : Contron Pack
T : Tube Pack
R : Reel Pack


VERSION & EC DESCRIPTION


| DATE | VERSION | PAGE | DESCRIPTION |
|------------|---------|-------|----------------------------------|
| 2004/03/26 | A | 10-11 | Add HPD21 Series Plan |
| 2005/03/09 | A | 10-11 | Add Pack : Contron 、 Tube 、 Reel |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | |
|-----------------|-----------|------------------------|--|
| GENAL TOLERANCE | DRAW DATE | 2004/03/26 H. D. LI | PART NO |
| X. ± 0.50 | DESIGN | H. D. LI | HPD21 - XX1 - XX - A/C/ B-XX-X |
| .X ± 0.38 | CHECKED | Y. M. LU | TITLE |
| .XX ± 0.25 | APPROVED | J. F. KANG | 2.54 2xXX 雙層排針 A/C/B/DIP 黑 P.B.T |
| .XXX ± 0.15 | UNIT :mm | |  宏揚精密有限公司 HOJAR PRECISION CO. : LTD. |

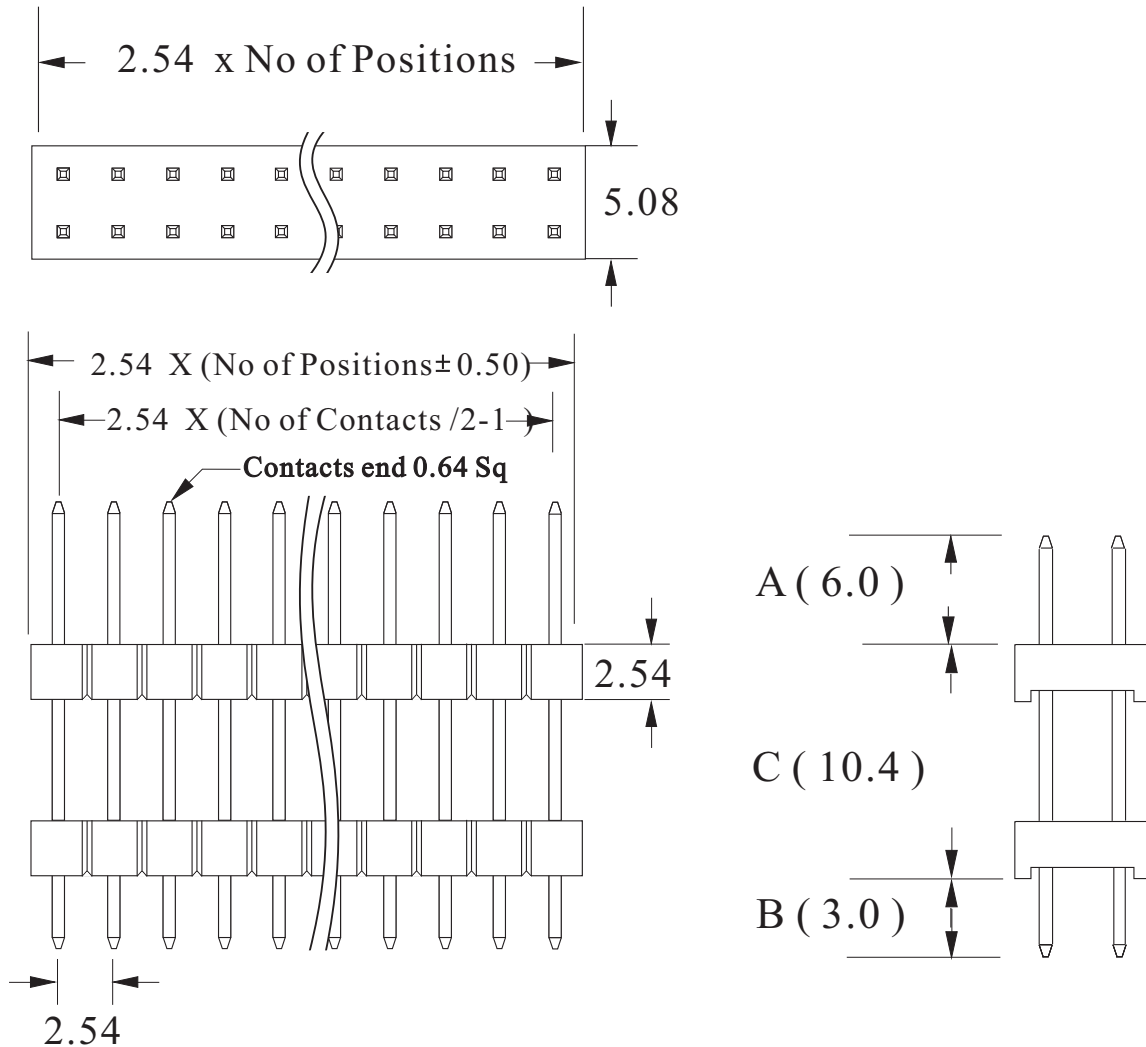

Recommended P.C.Board Hole Layout :

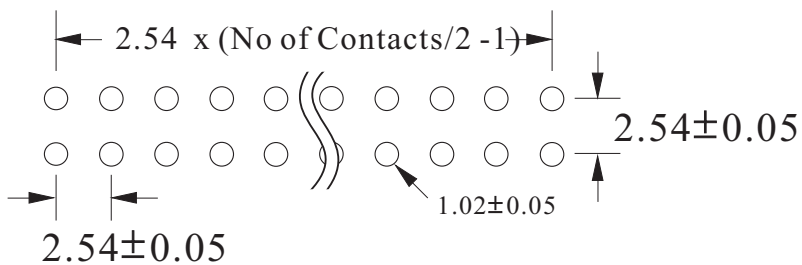

| | | |
|--|-------------------------------------|--|
| GENERAL TOLERANCE X. ± 0.50 .XX ± 0.38 .XXX ± 0.25 .XXX ± 0.15 | DRAW DATE 2004/03/26 H. D. LI | PART NO HPD21 - XX1 - XX - A/C/ B-XX-X |
| | DESIGN H. D. LI | TITLE 2.54 2xXX 雙層排針 A/C/B/DIP 黑 P.B.T |
| | CHECKED Y. M. LU | |
| UNIT :mm | APPROVED J. F. KANG |  宏揚精密有限公司 HOJAR PRECISION CO. : LTD. |