

SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Housing : Nylon 6T.

Terminal : Brass 65/35

ORDER INFORMATION:

SHPD21 - $\frac{XX}{a} \frac{1}{b} - \frac{XX}{c} \frac{X}{d} - \frac{A}{e} \frac{B}{f} \frac{XX}{g} - \frac{X}{h}$

a. Pin of numbers:

06 ~ 64

b. Plastic Base

1 : H=2.54mm(standard)

2 : H=1.5mm

3 : H=1.7mm

c. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. 0 : Without Post

1 : With Post

e. Pin length:

if you desire on other length, by marking

put desired length the A / B

(Standard : A / B).

f. Plastic Color :

B:black

g. Plastic material

P : P.B.T (off料)

E : P.B.T (新料)

N : Nylon 6T (Standard)

*H=2.54mm P.B.T

h. Pack selection:


C : Contron Pack


T : Tube Pack

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	12-13	Add SHPD21 Series Plan
2005/03/09	A	12-13	Add Pack : Contron 、 Tube 、 Reel

GENAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	SHPD21-XX1-XX-A/B-XX-X
.X ± 0.38	CHECKED	Y. M. LU	TITLE
.XX ± 0.25	APPROVED	J. F. KANG	2.54 2xXX 雙層排針 A/B SMD 黑 NYLON
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

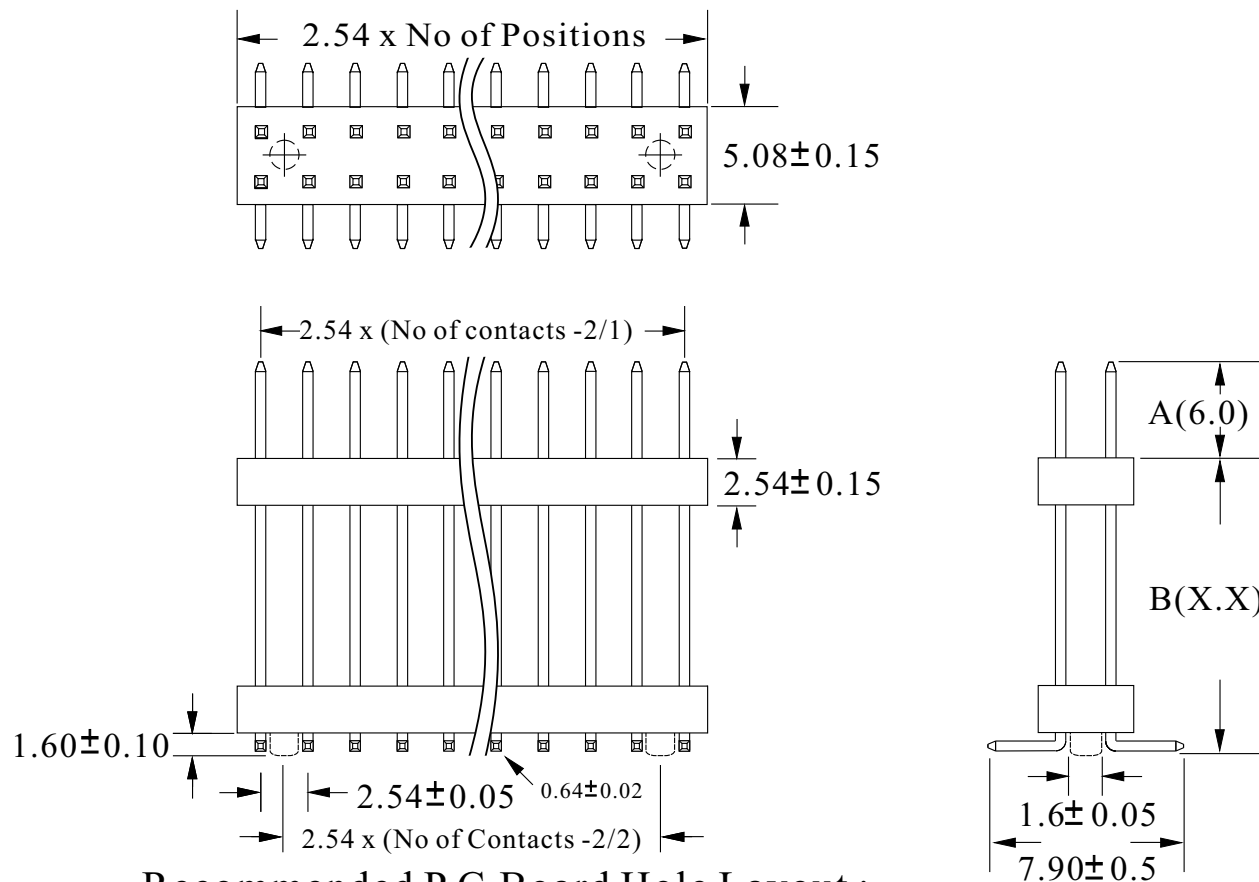

Recommended P.C.Board Hole Layout :

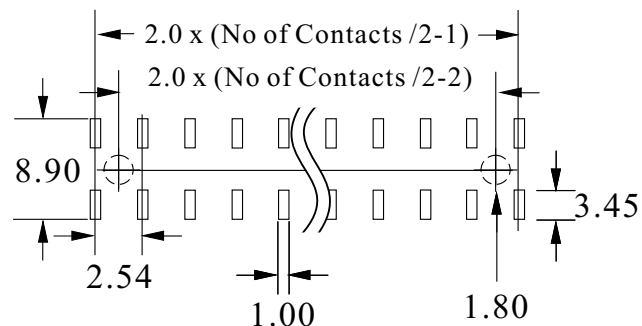

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2004/03/26 H. D. LI	PART NO SHPD21-XX1-XX-A/B-XX-X
	DESIGN H. D. LI	TITLE 2.54 2xXX 雙層排針 A/B SMD 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.