


MATERIAL  
 HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS



SPECIFICATION  
 CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 1000V RMS

ORDER INFORMATION:



HPDR11 -  $\frac{XX}{a} \frac{A}{b} - \frac{XX}{c} \frac{X}{d} - \frac{A}{e} / \frac{C}{f} / \frac{B}{g} - \frac{XX}{h} - \frac{X}{h}$

- a. Pin of numbers:  
04 ~ 80
- b. Plastic Base :  
A : H=2.54mm(standard)
- c. Plated selection :  
0 : Tin Plated  
1 : Gold Flash  
2 : Gold 5u"  
3 : Gold 15u"  
4 : Gold 30u"
- d. Post selection :  
0 : Without Post
- e. Pin length :  
if you desire on other length, by marking  
put desired length the A / C / B.  
(Standard:X.X/X.X/X.X)
- f. Plastic Color :  
B : black
- g. Plastic material  
P : P.B.T (off料)  
E : P.B.T (新料)  
N : Nylon 6T
- h. Pack selection:  
C : Contron Pack  
B : Bag Pack

GENAL TOLERANCE	DRAW	PART NO
X. ± 0.50	H. D. LI	HPDR11 - XXA - XX - A/C/B-XX-X
.X ± 0.38	DESIGN	H. D. LI
.XX ± 0.25	CHECKED	Y. M. LU
.XXX ± 0.15	APPROVED	J. F. KANG
UNIT :mm		TITLE 2.54 2xXX A/C/B DIP 90度 黑 P.B.T 11型
		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

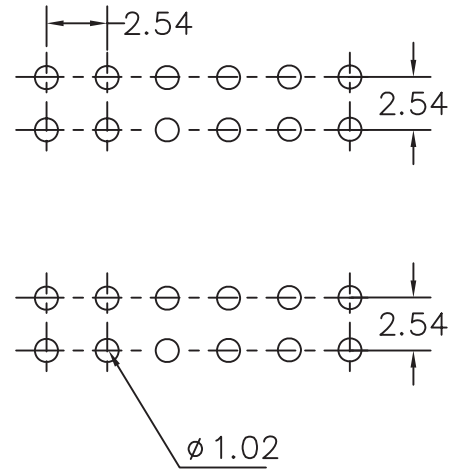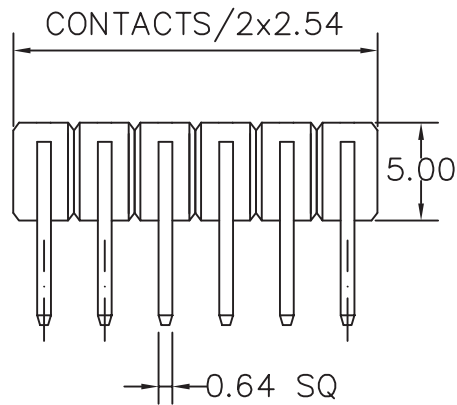

RECOMMENDED P.C.B LAYOUT

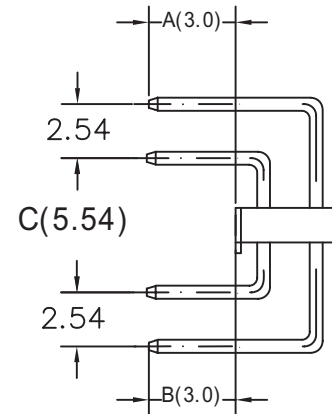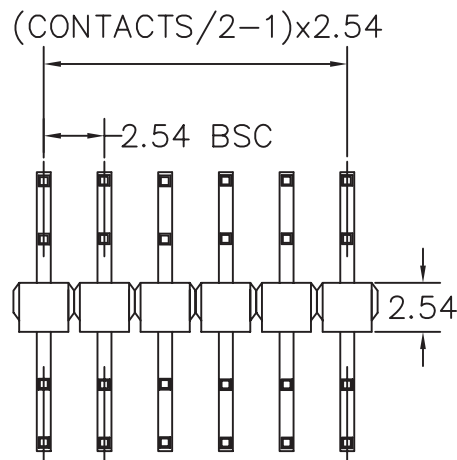

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW H. D. LI	PART NO HPDR11 - XXA - XX - A/C/B-XX-X
	DESIGN H. D. LI	TITLE 2.54 2xXX A/C/B DIP 90度黑 P.B.T 11型
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.