


**ORDER INFORMATION:**





**SHFDR4 - XX 3 - 1 X - XX - X**  
                     a     b     c     d       e     f     g  

- a. Pin of numbers:  
6~80
- b. Pastic Thick: 3: H=3.45mm
- c. Plated selection:  
0 : Tin plated  
1 : Gold flash  
2 : 5u" Gold  
3 : 15u" Gold  
4 : 30u" Gold
- d. Post selection :  
0 : Without Post
- e. Plastic Color :  
B : black color
- f. Plastic material selection:  
N : Nylon 6T ( Standard ).
- g. Pack selection:  
C : Contron Pack  
T : Tube Pack  
R : Reel Pack


Specifications

Current Rating : 1 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Phosphor Bronze  
 Insulator Material : Polyester, UL 94V-0  
                                   Nylon 6T  
 Contact Plated : Full Gold, Full Tin,  
                                   Selective Plated

GENAL TOLERANCE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 ANG ± 5°	DRAW H. D. LI	PART NO SHFDR4-XX1-1X-XX-X
	DESIGN H. D. LI	TITLE 1.27 Female Header Dual Rows SMT TYPE BASE 3.45H
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.	

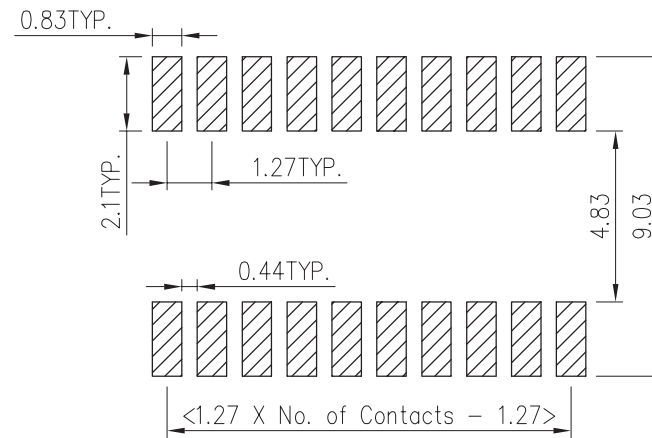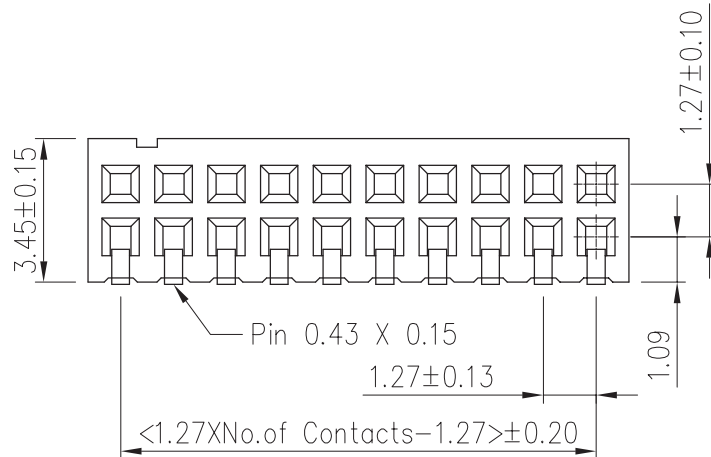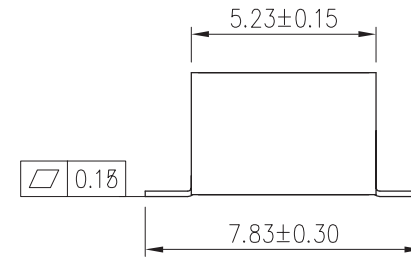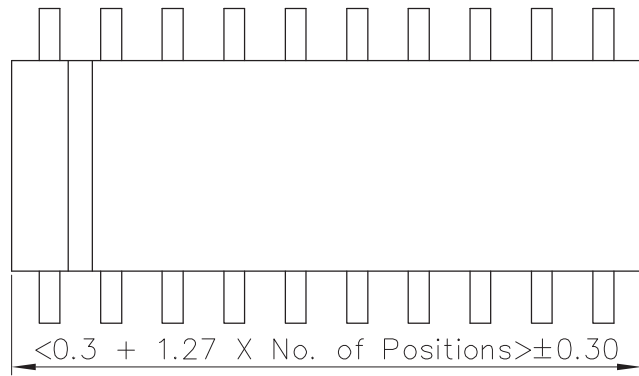

Recommended P.C.Board  
 Hole Layout  
 (Tolerance:  $\pm 0.10$ )

GENAL TOLERANCE .X $\pm 0.38$ .XX $\pm 0.25$ .XXX $\pm 0.13$ ANG $\pm 5^\circ$	DRAW H. D. LI	PART NO SHFDR4-XX1-1X-XX-X
	DESIGN H. D. LI	TITLE 1.27 Female Header Dual Rows SMT TYPE BASE 3.45H
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.