

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT : 1A

OPERATING TEMPERAURE : -40°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 5000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 500 V AC MIN

ORDER INFORMATION:

$$\text{HFD5} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{X}}{\text{e}} - \frac{\text{X}}{\text{f}} \frac{\text{X}}{\text{g}} - \frac{\text{X}}{\text{h}}$$

a. Pin of numbers:

06 ~ 100

b. Plastic Base :

1 : H=4.60mm(standard)

c. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

d. Post selection :

0 : Without Post

e. Pin length :

if you desire on other length, by marking
put desired length the B.

1= 2.4mm(standard)

f. Plastic Color :

B : black

g. Plastic material

N : Nylon 6T

L : LCP

h. Pack selection:

C : Contron Pack


T : Tube Pack



D : Disk Pack

B : Bag Pack



VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/08/11	A	14-15	Add HFD5-XX1 Series Plan
2005/03/09	A	14-15	Add Pack : Contron 、 Tube 、 Reel

GENAL TOLERANCE X. ± .X ± 0.38 .XX ± 0.25	DRAW DATE	2004/08/11 H. D. LI	PART NO HFD5 - XX1 - XX - X - XX - X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	TITLE 1.27*2.54 2xXX 母座 H=4.60 DIP 黑 NYLON
UNIT :mm	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

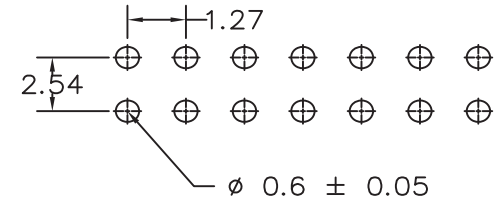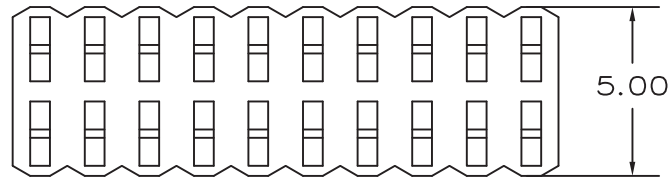

P.C.B. LAYOUT

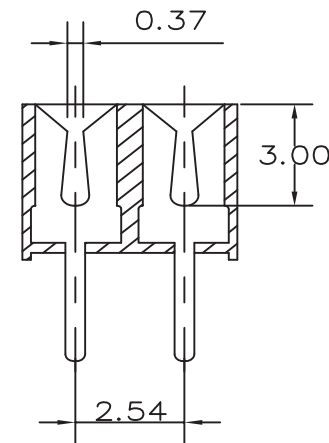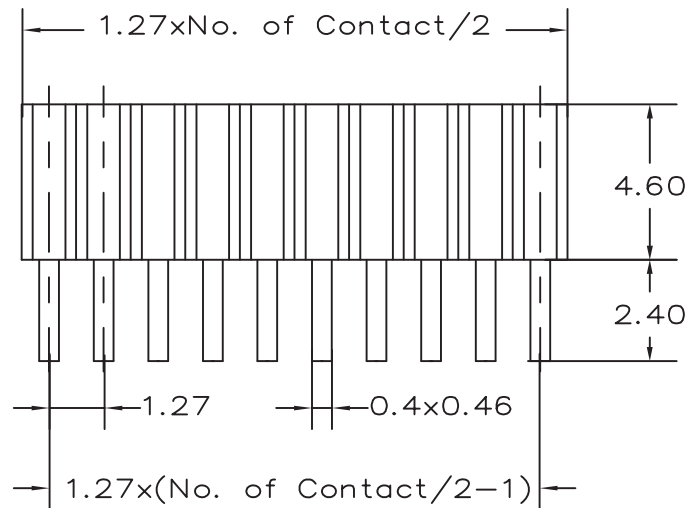

GENERAL TOLERANCE X. \pm .X ± 0.38 .XX ± 0.25	DRAW DATE 2004/08/11 H. D. LI	PART NO HFD5 - XX1 - XX - X - XX - X
	DESIGN H. D. LI	TITLE 1.27*2.54 2xXX 母座 H=4.60 DIP 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.