

SPECIFICATIONS

Current Rating : 2 Amp

Dielectric Withstanding : 500V AC/DC

Contact resistance : 20 Milliohms Max.

Insulation Resistance : 1000 MΩ Min.

Temperature range : - 40°C ~ + 105°C


MATERIAL :

Housing : Nylon 6T

Terminal : Phosphor Bronze

ORDER INFORMATION:HFD2078 - XX 5 - X0 - 2 - XX - X
a b c d e f g



- a. Pin of numbers: 04 ~ 80
- b. Pastic Thick : 5: 4.3mm
- c. Plated selection:
0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold Flash on Contact Area
6 : Duplex 5u" Gold on Contact Area
7 : Duplex 15u" Gold on Contact Area
8 : Duplex 30u" Gold on Contact Area
- d. Solder Pin length :
2: A=3.6mm
- e. Plastic Color :
B : black color
- f. Plastic material selection:
N : Nylon 6T.
- g. Pack selection:
C : Contron Pack
T : Tube Pack
R : Reel Pack

GENAL TOLERANCE	DRAW DATE	2006/03/27 H. D. LI	PART NO
X. ± 0.30	DESIGN	H. D. LI	HFD2078-XX5-X0-2-XX-X
.X ± 0.20	CHECKED	Y. M. LU	TITLE
.XX ± 0.15	APPROVED	J. F. KANG	2.0 2xXX 母座 H=4.3 DIP 黑 NYLON
.XXX ± 0.10	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.



VERSION


A

Pitch 2.00mm Double Row Female Header DIP Series Pin Length=3.6mm 2/2

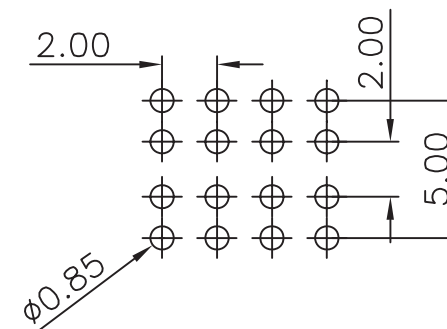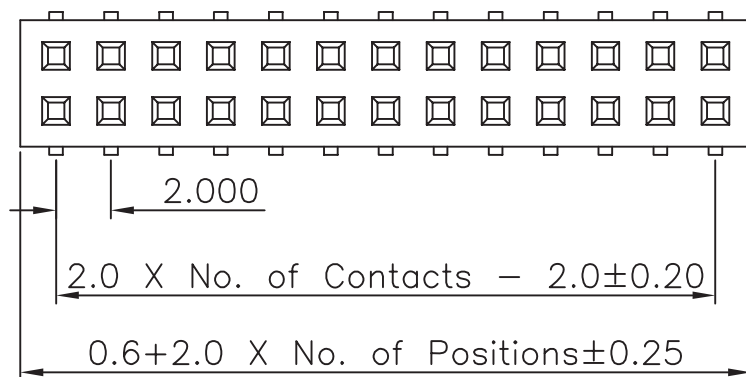

Recommended P.C.Board
Hole Layout

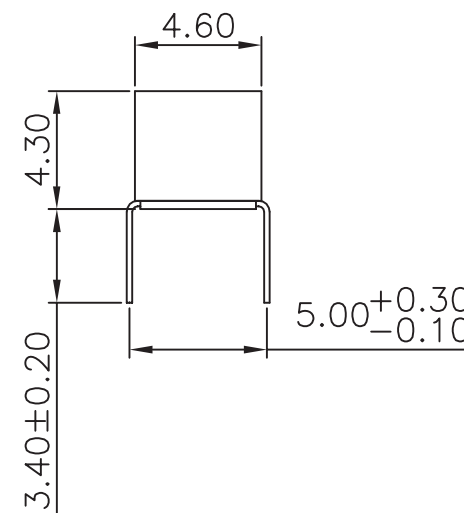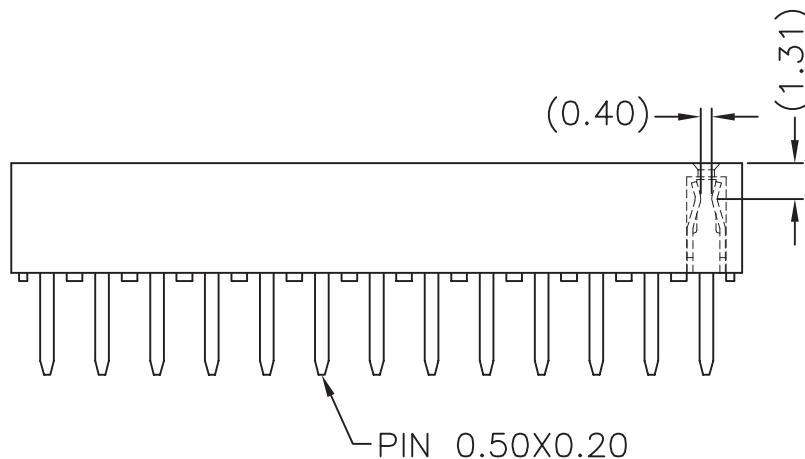

GENAL TOLERANCE X. ± 0.30 .X ± 0.20 .XX ± 0.15 .XXX ± 0.10	DRAW 2006/03/27 DATE H. D. LI	PART NO HFD2078-XX5-X0-2-XX-X
	DESIGN H. D. LI	TITLE 2.0 2xXX 母座 H=4.3 DIP 黑 NYLON
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.