

SPECIFICATIONS

Current rating : 1 Amp

Dielectric Withstanding : AC 500V

Contact resistance : 20 Milliohms Max.

Insulation resistance : 5000 Megohms Min.

Temperature range : - 40°C ~ + 105°C

MATERIAL :

Housing : NYLON 9T

Terminal : Phosphor Bronze


ORDER INFORMATION:




HFD2 - XX A - X0 - X - XX - X
 a b c d e f g

- a. Pin of numbers: 04 ~ 80
- b. Pastic Thick : A : 4.3mm
- c. Plated selection:
 0 : Tin plated
 1 : Gold flash
 2 : 5u" Gold on Contact Area
 3 : 15u" Gold on Contact Area
 4 : 30u" Gold on Contact Area
 5 : Duplex Gold Flash on Contact Area
 6 : Duplex 5u" Gold on Contact Area
 7 : Duplex 15u" Gold on Contact Area
 8 : Duplex 30u" Gold on Contact Area
- d. Solder Pin length :
 1 : A=2.4mm
- e. Plastic Color :
 B : black color
- f. Plastic material selection:
 N: Nylon 9T
- g. Pack selection:
 B: Bag
 C : Contron Pack
 T : Tube Pack
 D: Disk
 R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/08/12	A	24-25	Add HFD2-XXA Plan
2005/03/09	A	24-25	Add Pack : Bag Cortron · Tube · Disk Reel

GENAL TOLERANCE	DRAW DATE	2004/08/12 H. D. LI	PART NO
X. ± 0.55	DESIGN	H. D. LI	HFD2-XXA-X0-1-XX-X
.X ± 0.50	CHECKED	Y. M. LU	TITLE
.XX ± 0.15	APPROVED	J. F. KANG	2.0 2xXX 母座 H=4.3 DIP 黑 NYLON
.XXX ± 0.10	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

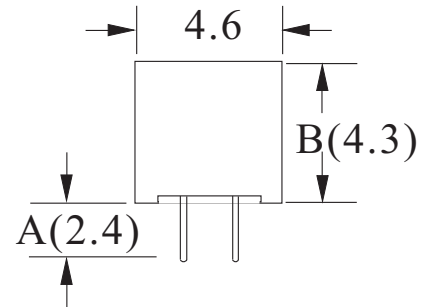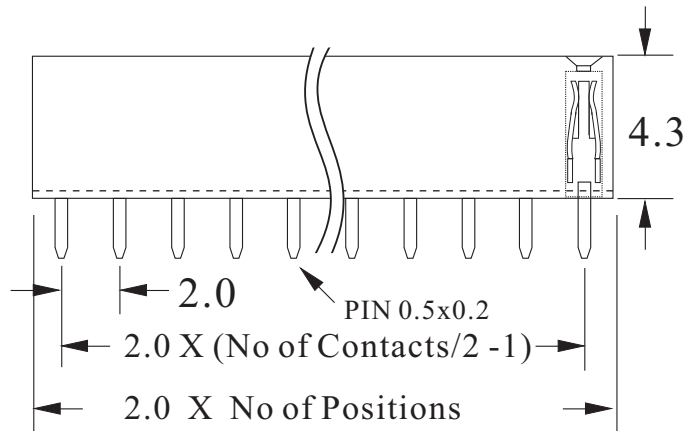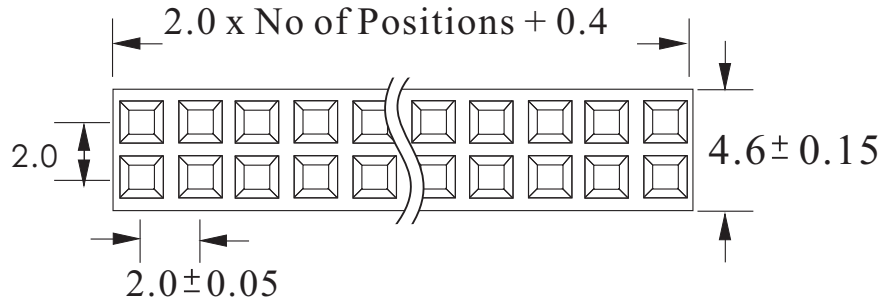

Recommended P.C.Board Hole Layout :

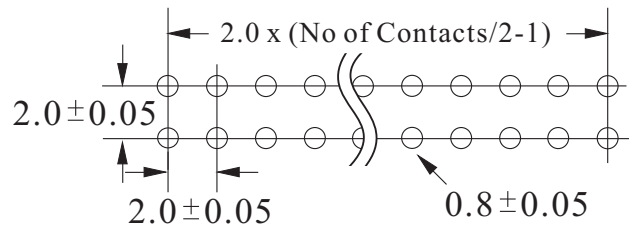

GENERAL TOLERANCE X. ± 0.55 .XX ± 0.50 .XXX ± 0.15	DRAW DATE 2004/08/12 H. D. LI	PART NO HFD2-XXA-X0-1-XX-X
	CHECKED Y. M. LU	TITLE 2.0 2xXX 母座 H=4.3 DIP 黑 NYLON
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.