

# Pitch 2.00mm Double Row Female Header SMD Series H=5.0mm 1/2

## ORDER INFORMATION:

SHFD2078 - XX 3 - 1 X - XX - X  
a b c d e f g

### Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°

### Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0  
NYLON-6T

a. Pin of numbers:

4~50

b. Plastic Thick: 3: H=5.00mm

c. Plated selection:

0 : Tin plated

1 : Gold flash

2 : 5u" Gold on Contact Area

3 : 15u" Gold on Contact Area

4 : 30u" Gold on Contact Area

5 : Duplex Gold Flash on Contact Area

6 : Duplex 5u" Gold on Contact Area

7 : Duplex 15u" Gold on Contact Area

8 : Duplex 30u" Gold on Contact Area

d. Post selection :

0 : Without Post

e. Plastic Color :

B : black color

f. Plastic material selection:


N : Nylon 6T ( Standard ).

g. Pack selection:

C : Contron Pack

T : Tube Pack



R : Reel Pack

GENAL TOLERANCE	DRAW DATE	2005/07/27 H. D. LI	PART NO
	DESIGN	H. D. LI	SHFD2078-XX3-1X-XX-X
	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	2.0 2xXX 母座 H=5.0 SMT SIDE ENTRY
UNIT :mm	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.		


VERSION

A

## Pitch 2.00mm Double Row Female Header SMD Series H=5.0mm 2/2

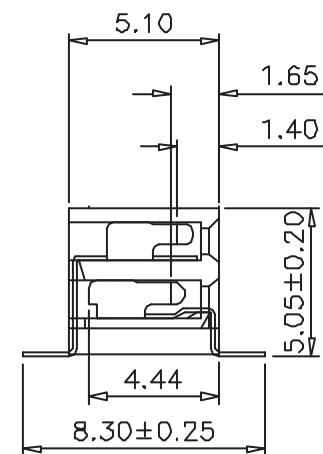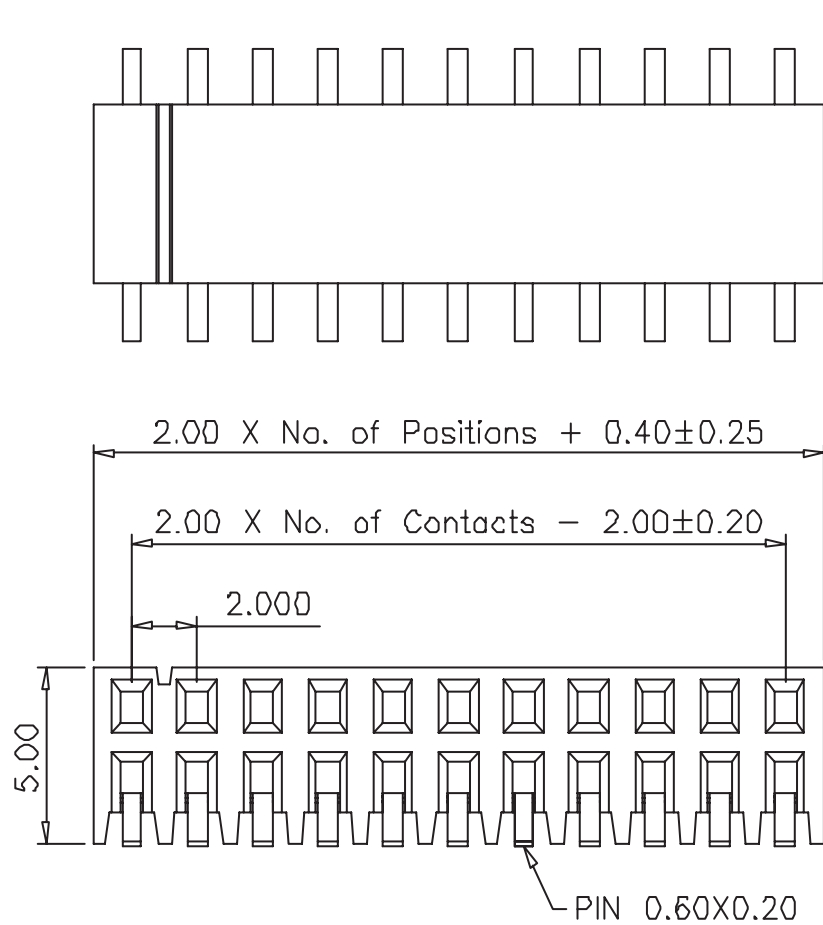

## RECOMMENDED P.C.B LAYOUT

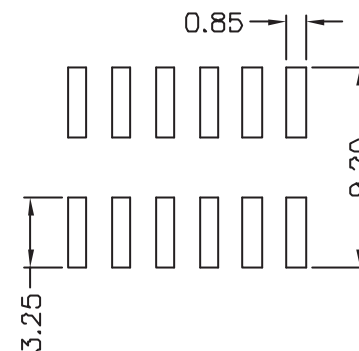

GENAL TOLERANCE  
.X  $\pm 0.38$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.13$   
ANG  $\pm 5^\circ$

UNIT :mm

DRAW 2005/07/27  
DATE H. D. LI  
DESIGN H. D. LI  
CHECKED Y. M. LU  
APPROVED J. F. KANG

PART NO  
SHFD2078-XX3-1X-XX-X  
TITLE  
2.0 2xXX 母座 H=5.0 SMT SIDE ENTRY



宏揚精密有限公司  
HOJAR PRECISION CO., LTD.