

SPECIFICATIONS

Current rating : 3 Amps

Dielectric Withstanding : AC 500V

Contact resistance : 20 Milliohms Max.

Insulation resistance : 5000 Megohms Min.

Temperature range : - 40°C ~ + 105°C

MATERIAL :

Housing : Nylon 6T.

Terminal : Phosphor Bronze


ORDER INFORMATION:




HFD1 - $\frac{XX}{a}$ $\frac{1}{b}$ - $\frac{X}{c}$ 0 - $\frac{X}{d}$ - $\frac{X}{e}$ $\frac{X}{f}$ - $\frac{X}{g}$

- a. Pin of numbers: 08 ~ 80
- b. Pastic Thick : 1: 7.1mm
- c. Plated selection:
 0 : Tin plated
 1 : Gold flash
 2 : 5u" Gold on Contact Area
 3 : 15u" Gold on Contact Area
 4 : 30u" Gold on Contact Area
 5 : Duplex Gold Flash on Contact Area
 6 : Duplex 5u" Gold on Contact Area
 7 : Duplex 15u" Gold on Contact Area
 8 : Duplex 30u" Gold on Contact Area
- d. Solder Pin length :
 1 : A=3.0mm
- e. Plastic Color :
 B : black color
- f. Plastic material selection:
 N : Nylon 6T.
- g. Pack selection:
 C : Contron Pack D : Disk Pack
 T : Tube Pack
 R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	2-3	Add HFD1-XX1 Plan
2005/03/09	A	2-3	Add Pack : Contron 、 Tube 、 Reel

GENAL TOLERANCE	DRAW DATE	2007/10/09	PART NO
X. ± 0.38	H. D. LI		HFD1 - XX 1 - X 0 - X - X X - X
.X ± 0.25	DESIGN	H. D. LI	TITLE
.XX ± 0.15	CHECKED	Y. M. LU	2.54 2xXX 母座 H=7.1 DIP 黑PBT
.XXX ± 0.10	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

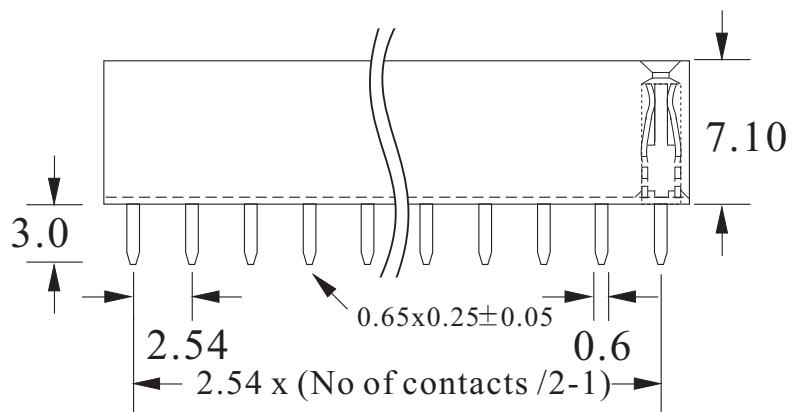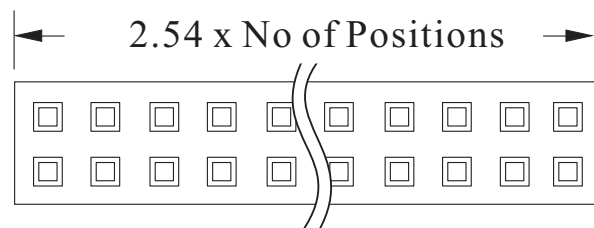

Recommended P.C.Board Hole Layout :

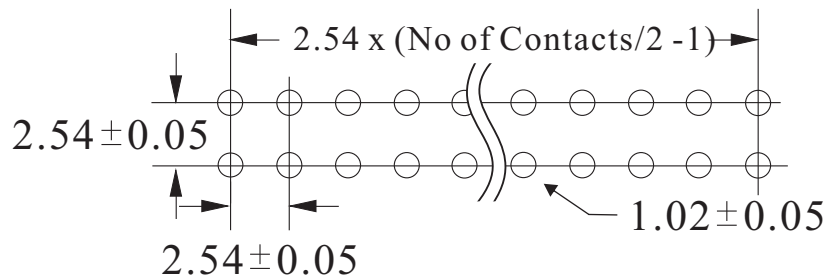

GENAL TOLERANCE X. ± 0.38 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10	DRAW DATE	2007/10/09 H. D. LI	PART NO HFD1 - XX 1 - X 0 - X - X X - X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	
	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.